
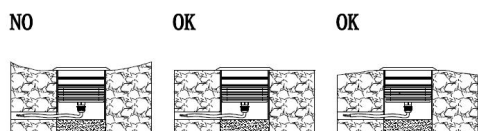




Please read user manual before commencing installation and keep it for future reference.

■WARNING.



- 1.The safety of this lighting fixture is guaranteed only if you comply with these instructions.
2. Don't connect these lights to the mains supply directly, and please use the specific proper driver with specific input voltage.
3. The driver must be electronic switching power supply with constant voltage output,must not be magnetic transformer.
4. Please disconnect the power before repair,installation or replacement.
5. Please use the lights in the proper application places as to avoid the lights be broken.
6. Do not locate fixtures in low areas where water will collect.
- 7.Please provide proper drainage (sand,gravel) for sleeve so that fixtures will not be immersed in water.
- 8.If any questions on this instruction,please consult a professional qualified technicians.

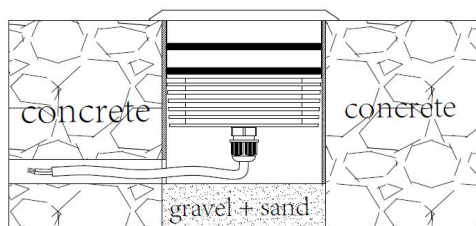

■Instructions of installation.

A.Used as inground light with mounting sleeve.

Please screw down the cover you buy to the lamp body firstly in a clockwise direction as the below drawing.s

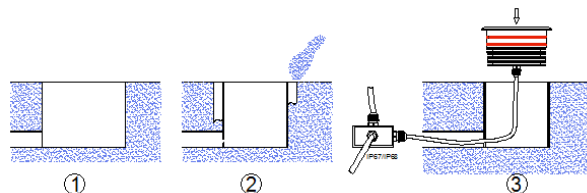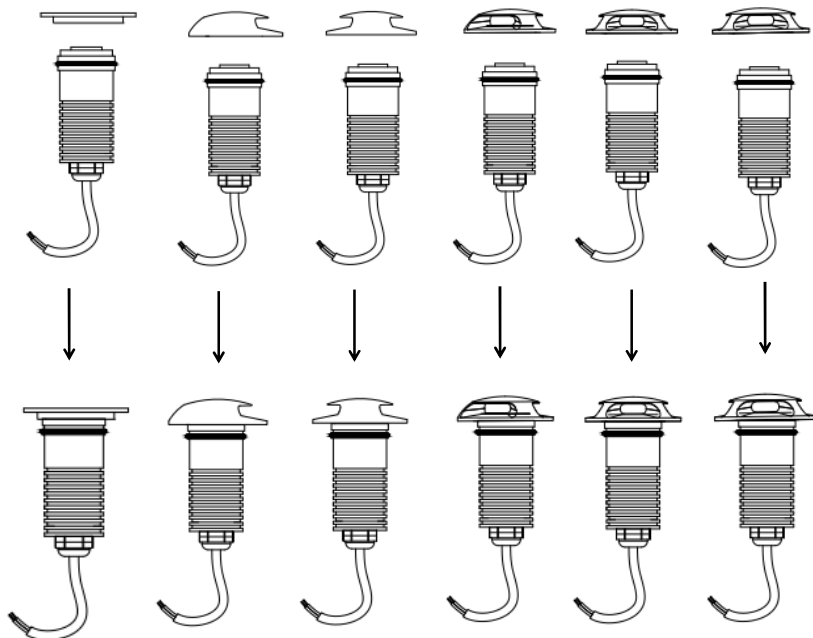

- 1.Ensure mains supply is switched off during the whole installation period.

Dug a hole according to the dimension of the mounting sleeve.



- 2.Place the mounting sleeve in the desired position with underneath a layer of gravel and sand. This to obtain a good drainage of the underground light, then fix it with the concrete. Please also make the tube for the lighting fixtures' wires to be connected with the power cable.

- 3.Use the IP67 or IP68 waterproof connector to connect the cables of the fixture and the cables of PWM RGBW controller and specific driver in parallel circuit.

Push the fixture into the mounting sleeve.Ensure everything is installed very well,and then turn on the power for the illumination application.

B. Used as wall light/ Wooden deck lighting with clip.

1. Install the clip and the cover you buy to the lamp body firstly in a clockwise direction
2. Make the cutout out 42 mm as the below drawing.
3. Use the IP67 or IP68 waterproof connector to connect the cables of the fixture and the cables of PWM RGBW controller and specific driver in parallel circuit.
4. Push the fixture into hole.Ensure everything is installed very well,and then turn on the power for the illumination application.

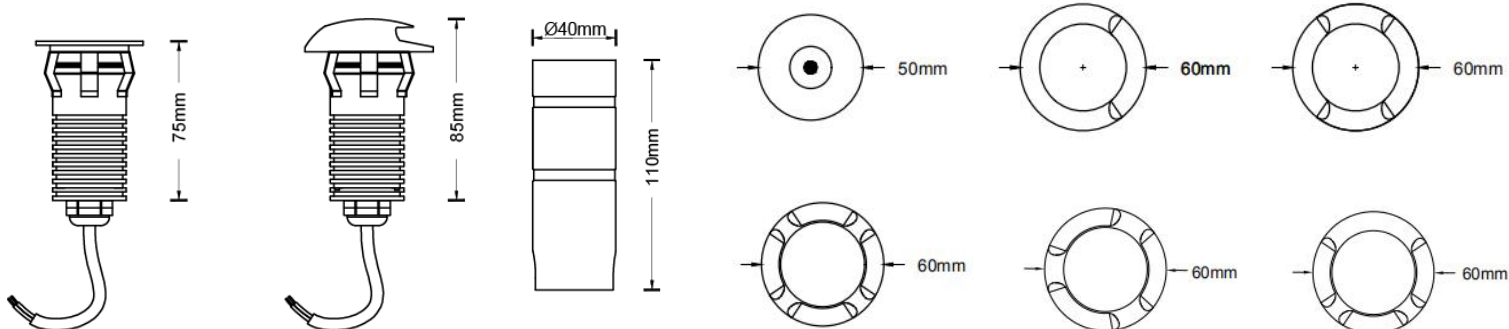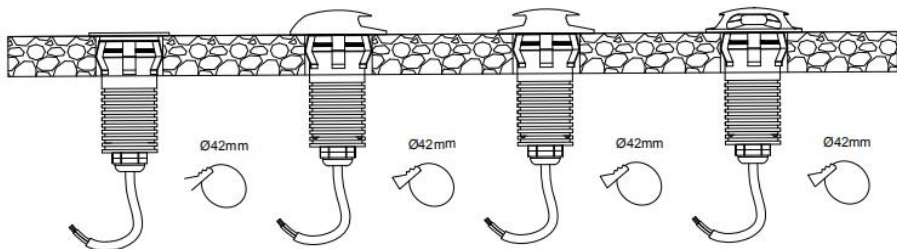

■Specifications.

Item No.:Saturn RGBW series

Input: DC12V

Power: 3W

IP rating: IP67

Class: III



Warning.

The non-professionals can not disassemble or repair the fixture. We keep the right to refuse the replacement or repairing of the fixtures that have been disassembled or repaired personally.