

MOON^{SERIES}

Products Features

These products are designed with sphere shape appearance for the whole garden lighting applications . They are with special design tempered glass and aluminium trim , Aluminum housing , with passivated (anodizing) anti-corrosion + powder coated painting finishing for housing , optics PMMA lens with wonderful light output , silicone gasket and cable gland for waterproof IP65 or IP67 and high quality CREE LED. This series are available in garden pole light , garden spot light , wall light , underwater spot light , down light that are in same type sphere shape design.

Application

These lights are widely used in the garden application , such as the garden of the house , hotel , the park etc. .

IP65,IP67,IP68



Moon 3B
MN03 Bracket


- IP67
- IK04
- Class III
- CE certification
- ETL certification
- SALT SPRAY TESTED (over 1000 hours)
- Net Weight 0.3kgs
- Rubber cable 1M 2*0.824 mm2
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 3 or 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
3 Watt	240 lm	2700K 3000K 4000K 6000K	10°, 15°, 24°, 36°, 60°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in coffee silver as standard or dark grey, Black, white

Dimension



Accessories

Spike-205



Optional

Round base D80



Optional

Pole300mm/500mm/750mm



Optional

8DPole 300mm/500mm/750mm
with spike or round base



Optional



Moon 8B
MN08 Bracket

- IP67
- IK04
- Class III
- CE certification
- ETL certification
- SALT SPRAY TESTED (over 1000 hours)
- Net Weight 1kgs
- Rubber cable 1M 2*0.824 mm2
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 3 or 5 Years Warranty



Passivated+Painted available colour for housing:

Matt black
No.7648

Dark grey
No.7678


Coffee silver
No.9283

Matt white
No.9003

General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
8 Watt	700 lm	2700K 3000K 4000K 6000K	12°, 24°, 38°, 45°, 60°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in coffee silver as standard or dark grey, Black, white

Dimension

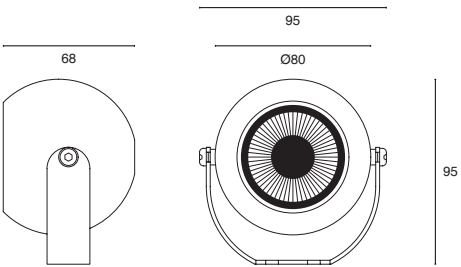

Accessories

Spike-205



Optional

Round base D80



Optional

Pole300mm/500mm/750mm



Optional

8DPole 300mm/500mm/750mm
with spike or round base



Optional



Moon 15B
MN15 Bracket

- IP67
- IK04
- Class III
- CE certification
- ETL certification
- SALT SPRAY TESTED (over 1000 hours)
- Net Weight 1.6kgs
- Rubber cable 1M 2*0.824 mm2
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 3 or 5 Years Warranty



Passivated+Painted available colour for housing:

Matt black
No.7648

Dark grey
No.7678

Coffee silver
No.9383

Matt white
No.9003

General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
15 Watt	1200 lm	2700K 3000K 4000K 6000K	10°, 15°, 24°, 36°, 60°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in coffee silver as standard or dark grey, Black, white

Dimension



Accessories

Spike-205



Optional

Round base D80



Optional

Pole300mm/500mm/750mm



Optional

8DPole 300mm/500mm/750mm
with spike or round base



Optional

Pole with brackets for two spot lights



Passivated+Painted available colour for housing:

Matt black
No.7648

Dark grey
No.7678

Coffee silver
No.9383

Matt white
No.9003

