

INGROUND LIGHTS

Vesta Series

Products Features

Vesta series are available in 3 W,6W,9W,12W,15W,refined appearance with anti-glare lens UGR<11 @36°, and honeycomb as options,IP67 waterproof, with patented flat PG gland for cable.

Small housing but big power, 3W is with 45mm diameter but high lumen 285lm, 15W is with 85mm diameter and 1100lm.




Mirror polishing SS316L cover



Anti-glare lens with Low UGR<11 @36°

Patented Flat PG

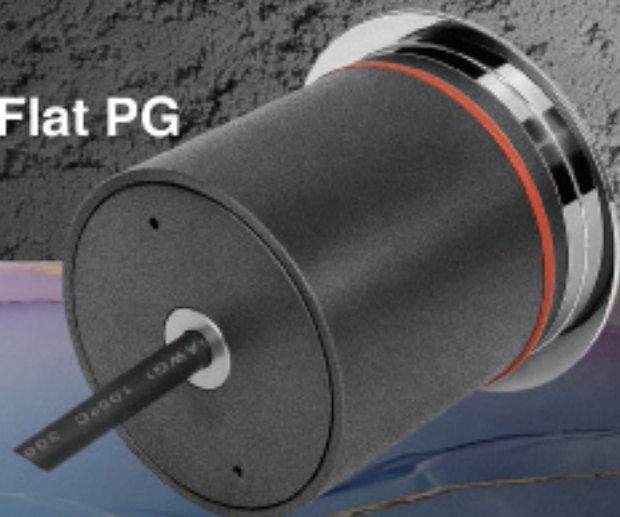

3 or 5 Years Warranty

IP67 CE ETL



Vesta 1
VT01


- IP67
- IK06
- Class III
- CE certification
- 100 kgs max. static load
- Net Weight 0.072 kgs
- Rubber cable 0.6M 2x0.75mm²
- OSRAM 3030 LED
- SDCM<5
- Ra ≥ 80
- 3 or 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
1.4 Watt	80 lm	2700K 3000K 4000K 6000K	15°, 25°, 30°, 45°, 60°, 120°	DC12-DC24V	SS316L	dark grey Aluminium

Dimension

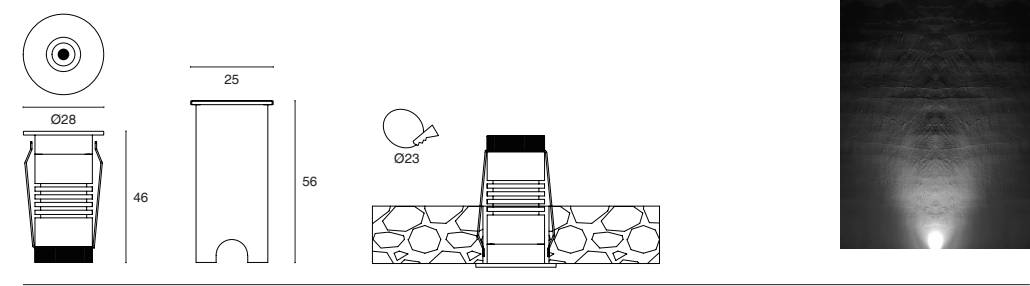

Accessories

Mounting tube



Included

Vesta 1S
VT01S


- IP67
- IK06
- Class III
- CE certification
- 100 kgs max. static load
- Net Weight 0.08 kgs
- Rubber cable 0.6M 2x0.75mm²
- OSRAM 3030 LED
- SDCM<5
- Ra ≥ 80
- 3 or 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
1.4 Watt	80 lm	2700K 3000K 4000K 6000K	15°, 25°, 30°, 45°, 60°, 120°	DC12-DC24V	SS316L	dark grey Aluminium

Dimension

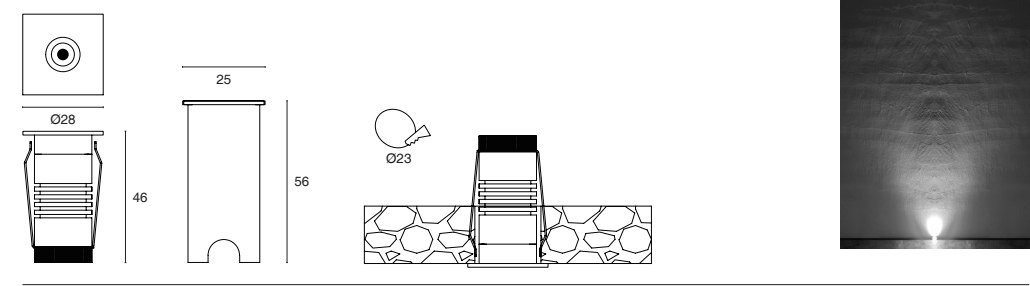

Accessories

Mounting tube



Included

Vest a 3
VT03

- IP67
- IK06
- Class III
- CE certification
- ETL certification
- 750 kgs max. static load
- Net Weight 0.3 kgs
- Rubber cable 1M 2x0.824mm²
- CREE COB LED
- SDCM<5
- Ra≥80
- 3 or 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
3 Watt	285 lm	2700K 3000K 4000K 5700K	15°, 2 4°, 36°, 50°	AC12 V (DC1 2- DC24 V optional)	SS31 6L Mirror polishing	dark grey Aluminium


Dimension



Accessories

Mounting tube

Honeycomb




Included

Optional

Vest a 6
VT06

- IP67
- IK06
- Class III
- CE certification
- ETL certification
- 750 kgs max. static load
- Net Weight 0.5 kgs
- Rubber cable 1M 2x0.824mm²
- CREE COB LED
- SDCM<5
- Ra≥80
- 3 or 5 Years Warranty

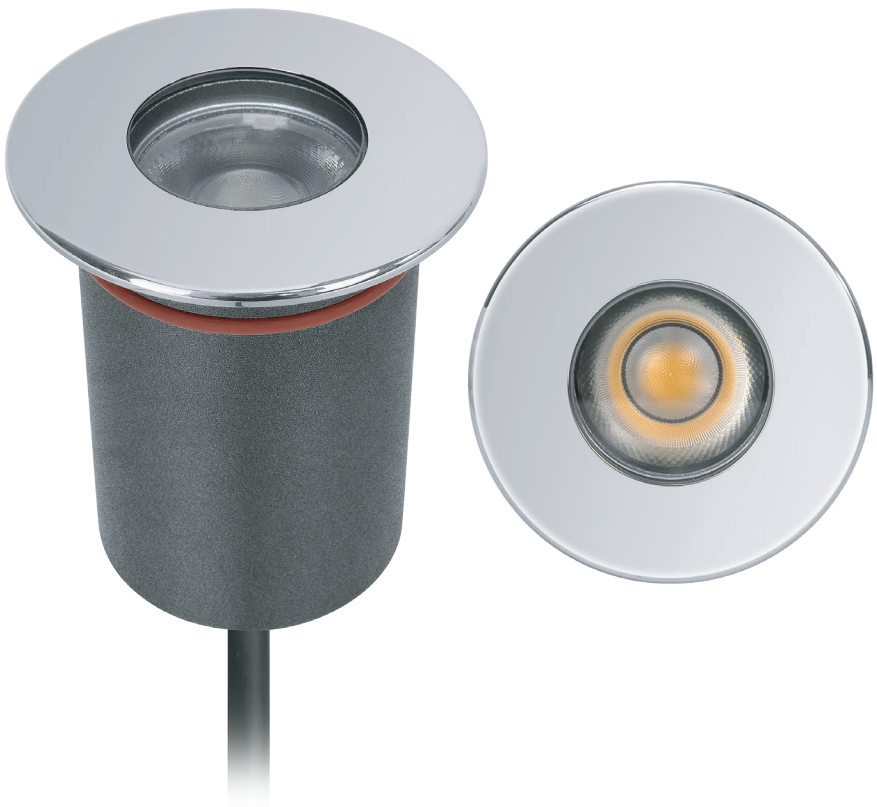

General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
6 Watt	480 lm	2700K 3000K 4000K 5700K	15°, 24°, 36°, 50°	AC12V (DC1 2- DC 24V optional)	SS 316L Mirror polishing	dark grey Aluminium


Dimension



Accessories

Mounting tube

Honeycomb



Included

Optional



Vesta 9
VT09

- IP67
- IK06
- Class III
- CE certification
- ETL certification
- 750 kgs max. static load
- Net Weight 0.6 kgs
- Rubber cable 1M 2x0.824mm²
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 3 or 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
9 Watt	650 lm	2700K 3000K 4000K 5700K	15°, 24°, 36°, 50°	AC12V (DC12- DC24V optional)	SS316L Mirror polishing	dark grey Aluminium

Dimension



Accessories

Mounting tube

Honeycomb



Included

Optional

Vesta 12
VT12

- IP67
- IK06
- Class III
- CE certification
- ETL certification
- 750 kgs max. static load
- Net Weight 0.75 kgs
- Rubber cable 1M 2x0.824mm²
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 3 or 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
12 Watt	920 lm	2700K 3000K 4000K 5700K	15°, 24°, 36°, 50°	AC12V (DC12- DC24V optional)	SS316L Mirror polishing	dark grey Aluminium

Dimension



Accessories

Mounting tube

Honeycomb




Included

Optional

Ves ta 15
VT15



- IP67
- IK07
- Class III
- CE certification
- ETL certification
- 750 kgs max. static load
- Net Weight 0.85 kgs
- Rubber cable 1M 2x0.824mm²
- CREE COB LED
- SDCM<5
- Ra≥80
- 3 or 5 Years Warranty

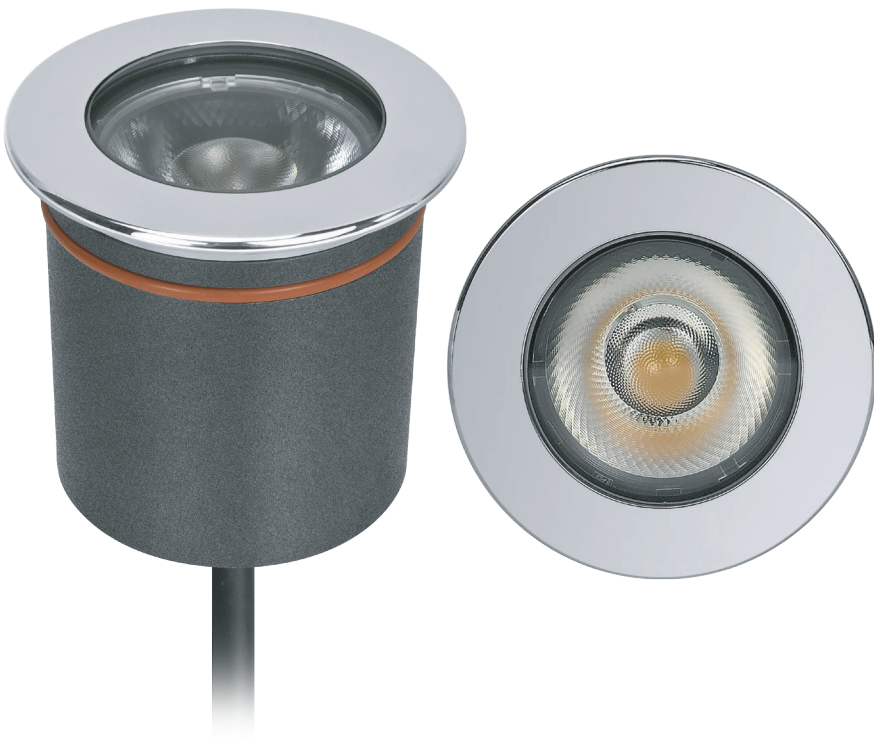

General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
15 Watt	1100 lm	2700K 3000K 4000K 5700K	15°, 24°, 36°, 50°	AC1 2V (DC 12- DC2 4V optional)	SS 316L Mirror polishing	dark grey Aluminium

Dimension

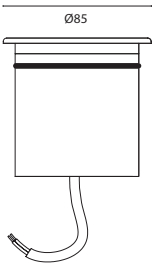

Accessories

Mounting tube



Included

Honeycomb



Optional

