


Carina 48-500
CA48500


- IP68
- IK04
- Class III
- CE certification
- Net Weight 1.92kgs
- Rubber cable 2 PCS 50CM 2*1.5mm2
- CREE XPG LED
- SDCM<5
- Ra ≥ 80
- 5 Years Warranty

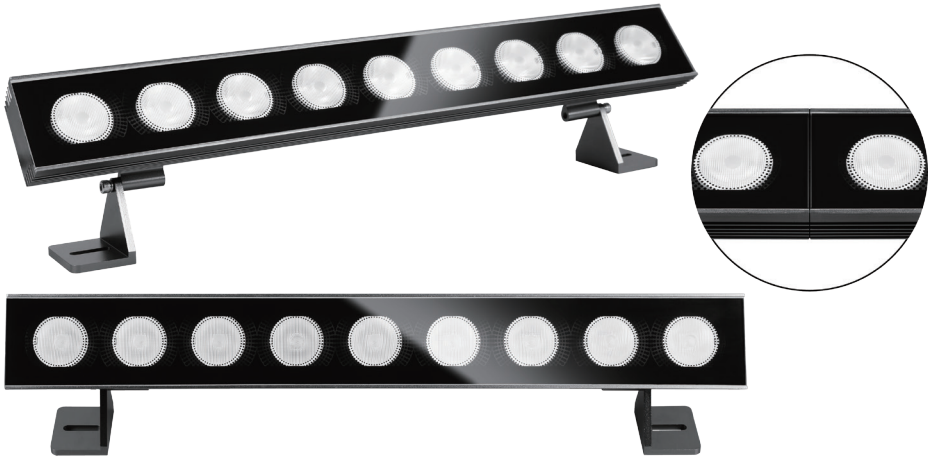

General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
48 Watt	1920 lm	2700K 3000K 4000K 6000K	5°, 8°, 12°, 24°, 36°, 60°, 10°30°	DC12V or DC24V	Aluminium + Tempered glass	Aluminium in dark grey

Dimension

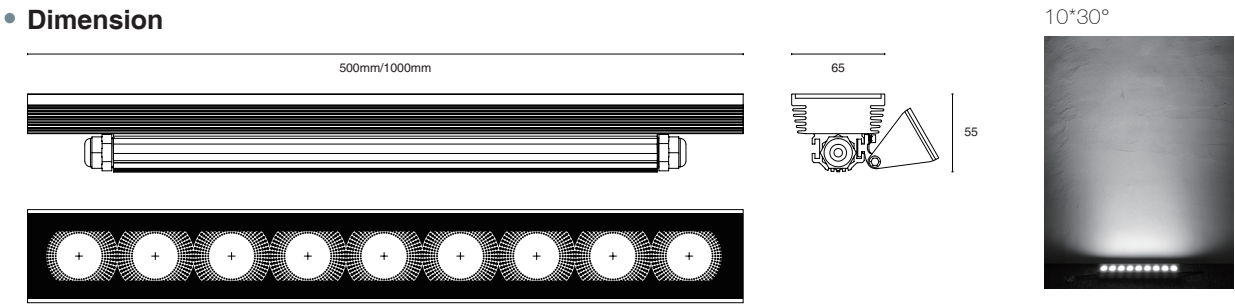

Accessories

IP68 I tube connector




Included



Carina 96-1000
CA961000


- IP68
- IK04
- Class III
- CE certification
- Net Weight 4kgs
- Rubber cable 2 PCS 50CM 2*1.5mm2
- CREE XPG LED
- SDCM<5
- Ra ≥ 80
- 5 Years Warranty

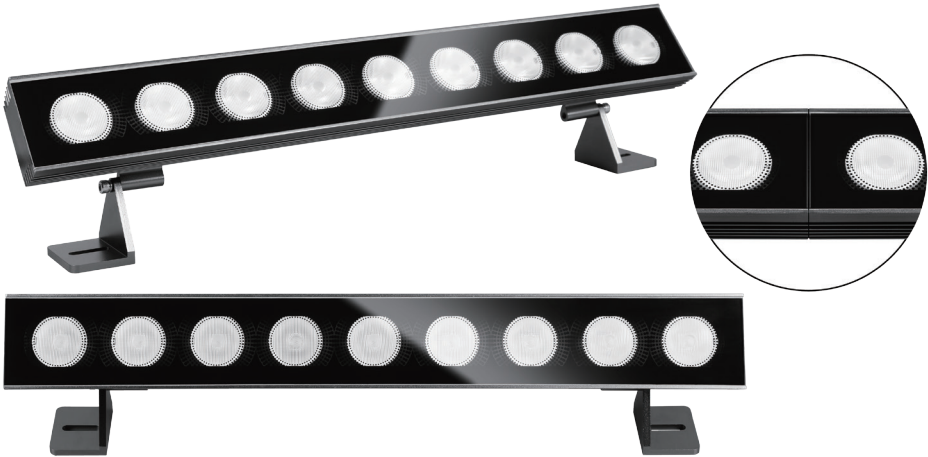

General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
96 Watt	3840 lm	2700K 3000K 4000K 6000K	5°, 8°, 12°, 24°, 36°, 60°, 10°30°	DC12V or DC24V	Aluminium + Tempered glass	Aluminium in dark grey

Dimension

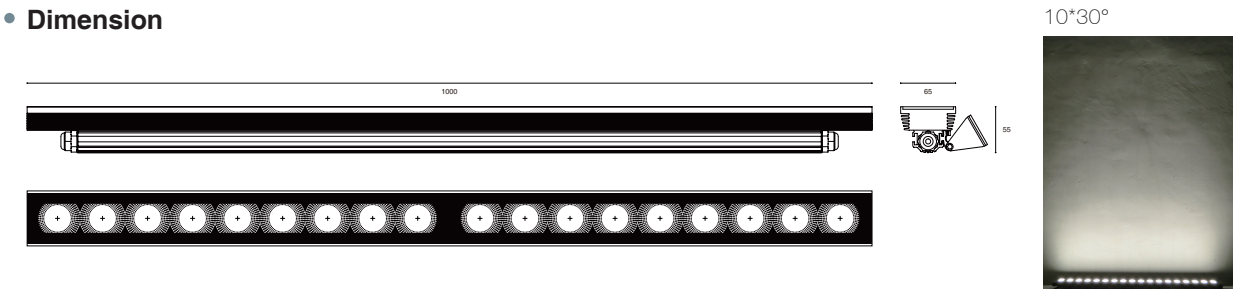


Accessories

IP68 I tube connector




Included



Carina18-500RGBW
CA18500RGBW


- IP68
- IK04
- Class III
- CE certification
- Net Weight 2kgs
- Rubber cable 1M 5*0.5mm2
- 4in1 RGBW 3030SMD LED
- SDCM<5 for W
- Ra ≥ 80 for W
- 5 Years Warranty

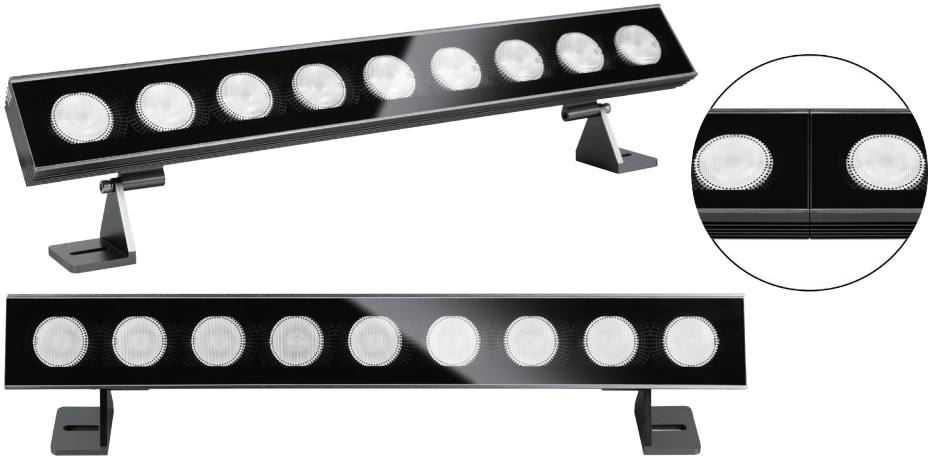

General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
18 Watt	720 lm	RGBW5500K	5°, 8°, 12°, 24°, 36°, 60°, 10°30°	DC12V	Aluminium + Tempered glass	Aluminium in dark grey

Dimension

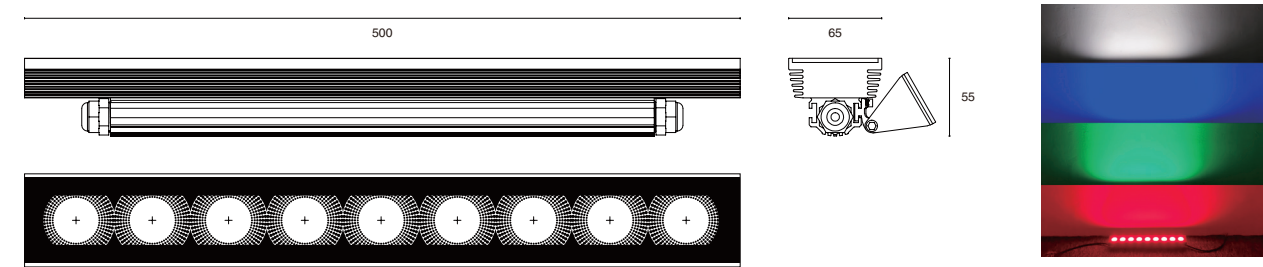

Accessories

IP68 I tube connector




Included



Carina 36-1000RGBW
CA361000RGBW


- IP68
- IK04
- Class III
- CE certification
- Net Weight 4kgs
- Rubber cable 1M 5*0.5mm2
- 4in1 RGBW 3030SMD LED
- SDCM<5 for W
- Ra ≥ 80 for W
- 5 Years Warranty

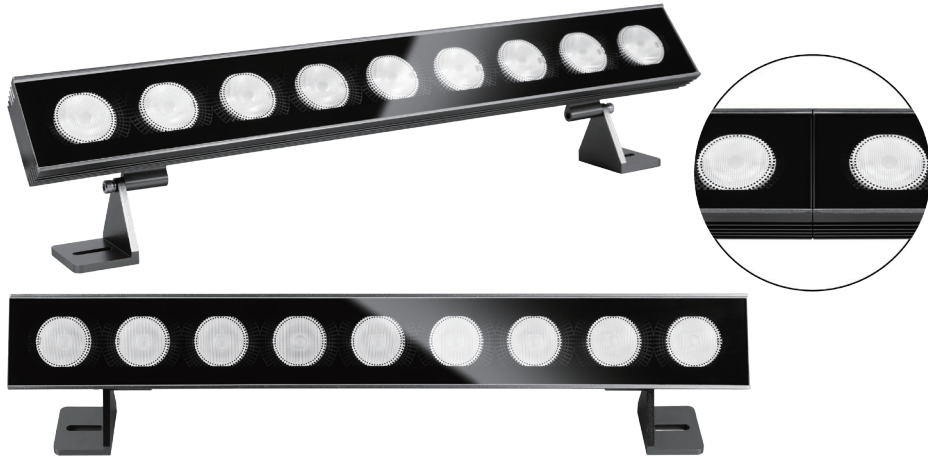

General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
36 Watt	1440 lm	RGBW5500K	5°, 8°, 12°, 24°, 36°, 60°, 10°30°	DC12V	Aluminium + Tempered glass	Aluminium in dark grey

Dimension

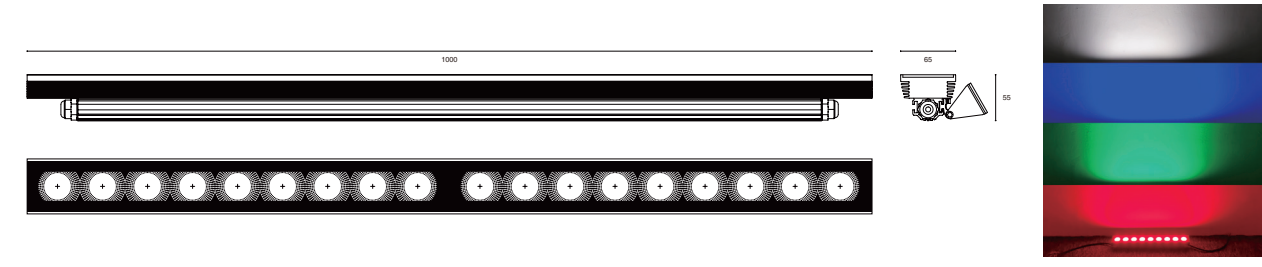

Accessories

IP68 I tube connector



Included