

IP68 I Tube Gel connector
WRC-D-I-PY



-  IP68
-  IK08
-  CE certification
-  Net Weight 0.11 kgs
-  3 Years Warranty



IP68 Fast connector with silicone gel
and 3-pole terminal block

For flexible Cables only	F
Cross-section	2 or 3x 0.5mm ² -2.5mm ²
Cable Diameter	5 mm -11 mm
Rated voltage, Max. current	250V ,Max.24A
Operating temperatu re	-40°C -85 °C


• Dimension

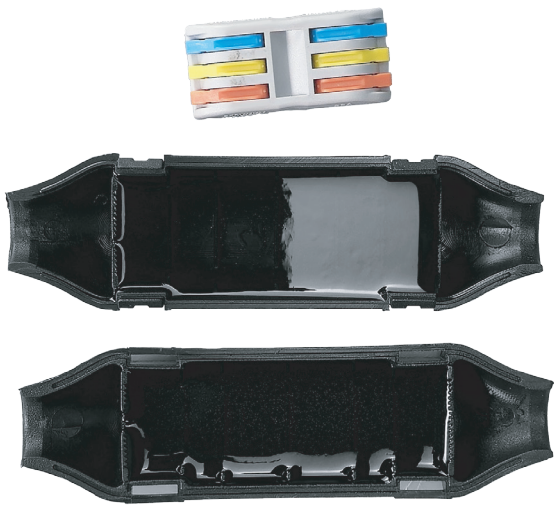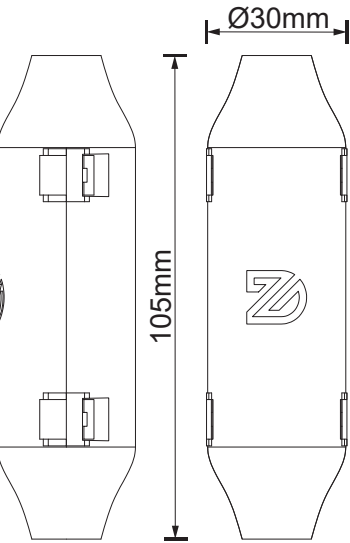

1



2

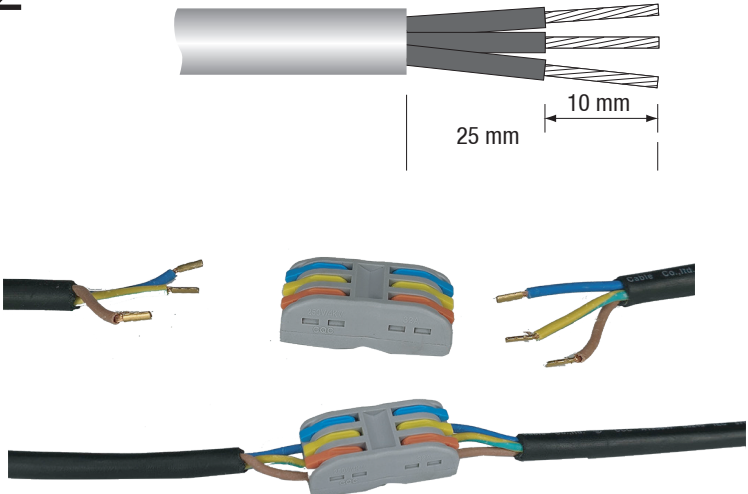


3



4



5

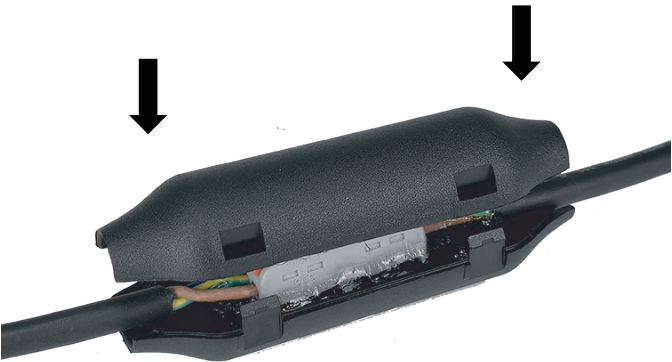

6

