


Jupiter 4A
JU04A


- IP65
- IK06
- Class III
- CE certification
- ETL certification
- Net Weight 0.369kgs
- PVC cable 0.3M 2*20#
- OSRAM 2835 LED
- SDCM<5
- Ra ≥ 80
- 5 Years Warranty

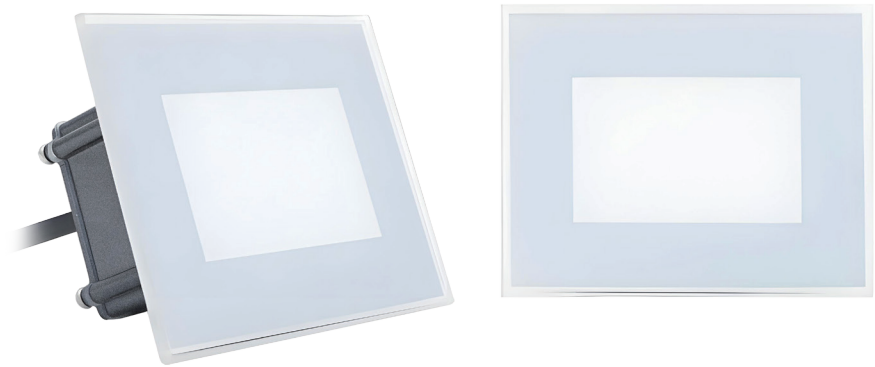

General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
4 Watt	120 lm	2700K 3000K 4000K 6000K	120°	AC12V as standard (DC12-24V optional)	Tempered milky white glass	Aluminium in dark grey

Dimension

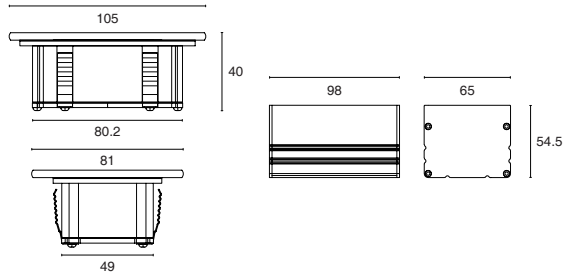

Accessories

Mounting box




Included



Jupiter 3B
JU03B


- IP65
- IK06
- Class III
- CE certification
- ETL certification
- Net Weight 0.369kgs
- PVC cable 0.3M 2*20#
- OSRAM 2835 LED
- SDCM<5
- Ra ≥ 80
- 5 Years Warranty

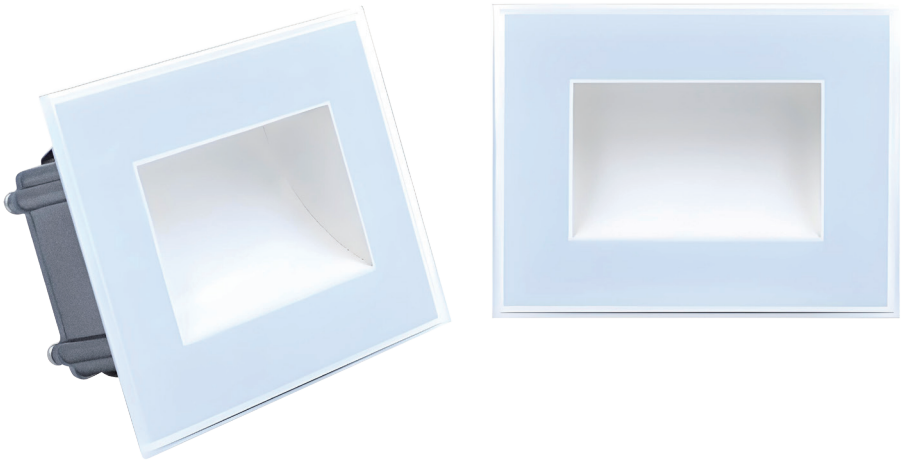

General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
3 Watt	160 lm	2700K 3000K 4000K 6000K	Asymmetric downward 45°x120°	AC12V as standard (DC12-24V optional)	Tempered glass	Aluminium in dark grey

Dimension

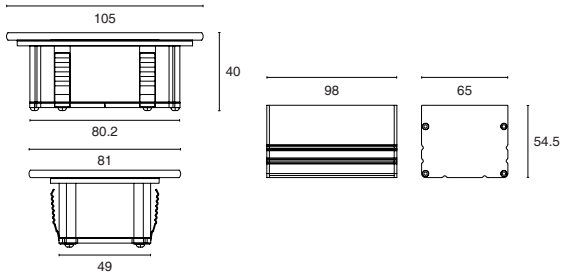

Accessories

Mounting box



Included





Jupiter 8A
JU08A


- IP65
- IK06
- Class III
- CE certification
- ETL certification
- Net Weight 0.45kgs
- PVC cable 0.3M 2*20#
- OSRAM 2835 LED
- SDCM<5
- Ra ≥ 80
- 5 Years Warranty



• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
8 Watt	210 lm	2700K 3000K 4000K 6000K	120°	AC12V as standard (DC12-24V optional)	Tempered milky white glass	Aluminium in dark grey

• Dimension

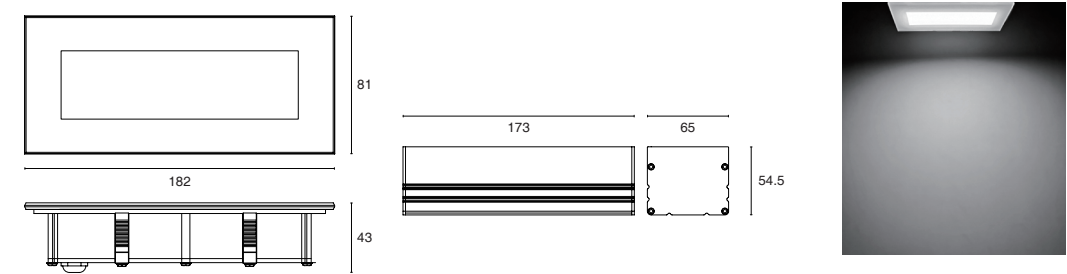

• Accessories

Mounting box



Included



Jupiter 5B
JU05B


- IP65
- IK06
- Class III
- CE certification
- ETL certification
- Net Weight 0.45kgs
- PVC cable 0.3M 2*20#
- OSRAM 2835 LED
- SDCM<5
- Ra ≥ 80
- 5 Years Warranty



• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
5 Watt	380 lm	2700K 3000K 4000K 6000K	Asymmetric downward 45°x120°	AC12V as standard (DC12-24V optional)	Tempered glass	Aluminium in dark grey

• Dimension

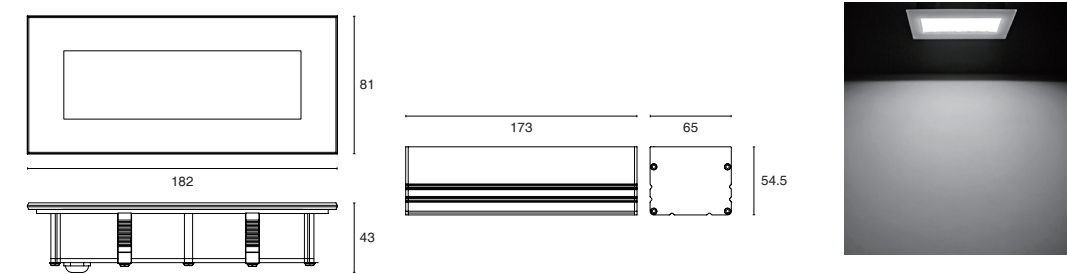

• Accessories

Mounting box



Included