



Moon 3P
MN03 Pole


- IP65
- IK04
- Class III
- CE certification
- ETL certification
- SALT SPRAY TESTED (over 1000 hours)
- Net Weight 0.35kgs with 500mm pole and spike
- PVC cable 1M 2*20#
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
3 Watt	240 lm	2700K 3000K 4000K 6000K	15°, 24°, 36°, 60°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in coffee silver as standard or dark grey, Black, white

Dimension

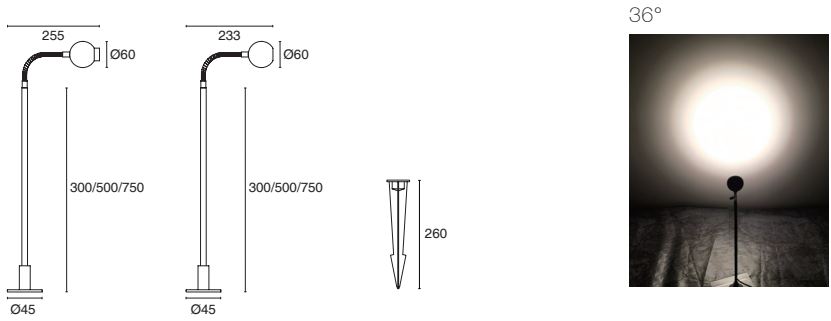

Accessories

Moon Spike-260




Included

Shield Q3



Optional





Moon 8P
MN08 Pole


- IP65
- IK04
- Class III
- CE certification
- ETL certification
- SALT SPRAY TESTED (over 1000 hours)
- Net Weight 0.45kgs with 500mm pole and spike
- PVC cable 1M 2*20#
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
8 Watt	540 lm	2700K 3000K 4000K 6000K	10°, 15°, 24°, 36°, 60°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in coffee silver as standard or dark grey, Black, white

Dimension

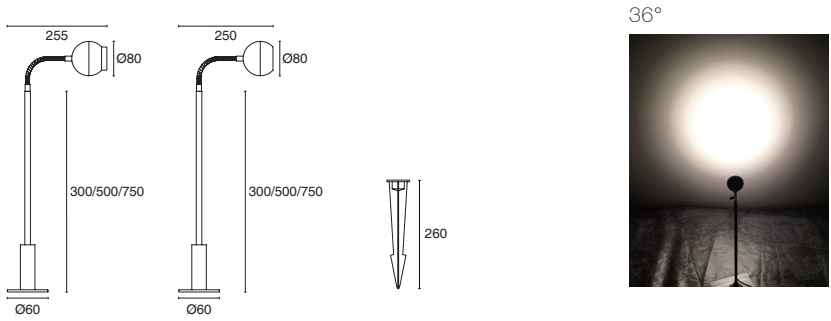

Accessories

Moon Spike-260



Included

Shield 03



Optional



Moon Zoom8PF
MN08 Zoom Pole


- IP65
- IK04
- Class III
- CE certification
- ETL certification
- SALT SPRAY TESTED (over 1000 hours)
- Net Weight 0.42kgs with 500mm pole and spike
- PVC cable 1M 2*20#
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
8 Watt	550 lm	2700K 3000K 4000K 6000K	Zoom 20° to 50°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in coffee silver as standard or dark grey, Black, white

Dimension

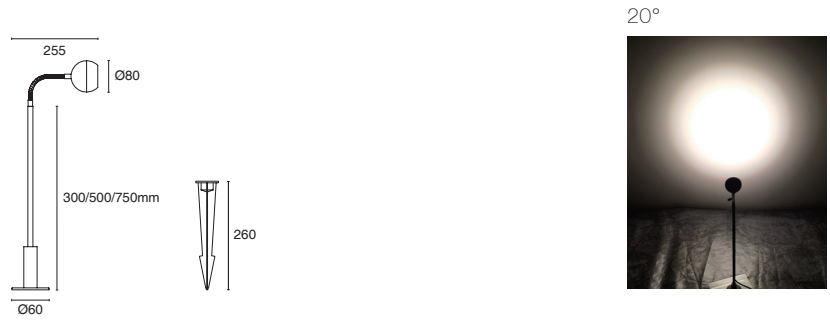

Accessories

Moon Spike-260



Included

Magnet for zoom



Included