

GARDEN SPOT LIGHTS

MARS Series

Products Features

Mars series are available in 3 W,6W,15W,25W,refined appearance with integrated 360° anti-glare shield,IP67 waterproof,and patented PG gland for cable.



Patented Flat PG

Integrated 360° anti-glare shield

3 or 5 Years Warranty

IP67 CE ETL



Mars 3
MA03


- IP67
- IK04
- Class III
- CE certification
- ETL certification
- SALT SPRAY TESTED (over 1000 hours)
- Net Weight 0.25kgs
- Rubber cable 1M 2*0.824mm²
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 3 or 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
3 Watt	130 lm	2700K 3000K 4000K 6000K	11°, 15°, 25°, 30°, 45°, 60°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in dark grey as standard or coffee silver, Black, white

Dimension

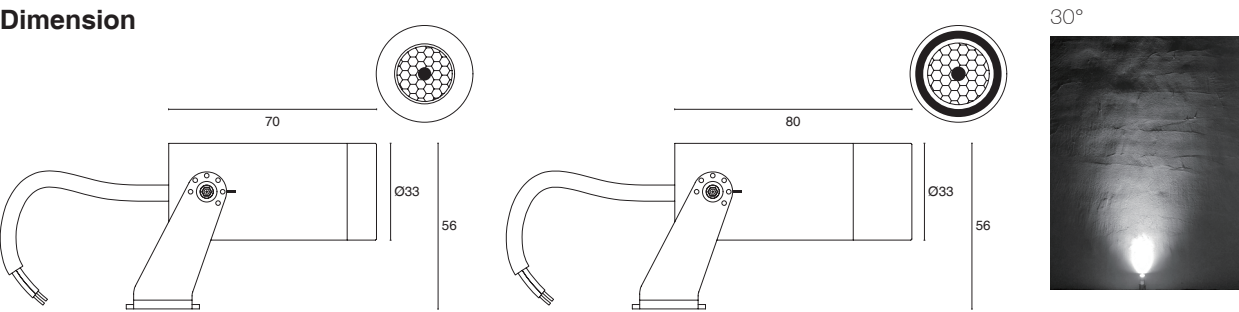

Accessories



Mars 6
MA06


- IP67
- IK04
- Class III
- CE certification
- ETL certification
- SALT SPRAY TESTED (over 1000 hours)
- Net Weight 0.45kgs
- Rubber cable 1M 2*0.824mm²
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 3 or 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
6 Watt	500 lm	2700K 3000K 4000K 6000K	15°, 24°, 36°, 60°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in dark grey as standard or coffee silver, Black, white

Dimension

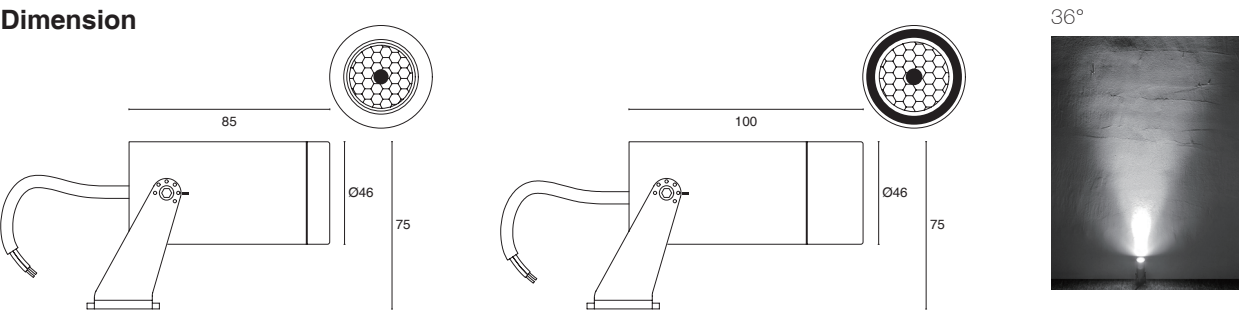

Accessories





Mars 15
MA15


- IP67
- IK04
- Class III
- CE certification
- ETL certification
- SALT SPRAY TESTED (over 1000 hours)
- Net Weight 0.8kgs
- Rubber cable 1M 2*0.824mm²
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 3 or 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
15 Watt	1100 lm	2700K 3000K 4000K 6000K	10°, 23°, 36°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in dark grey as standard or coffee silver, Black, white

Dimension

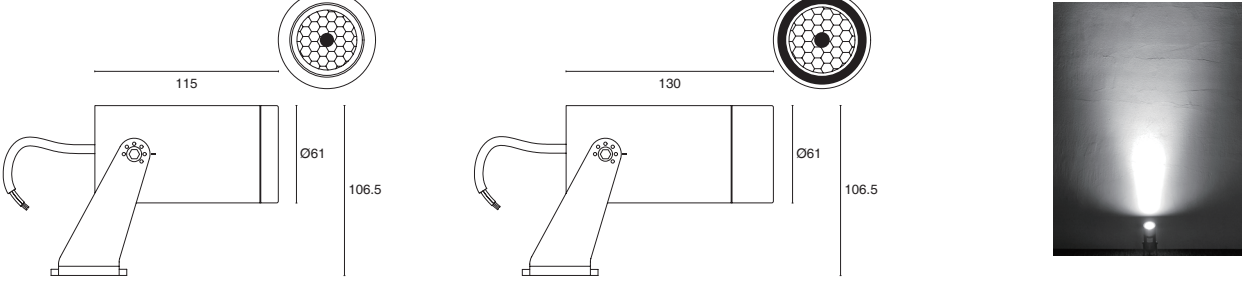

Accessories



Mars 25
MA25


- IP67
- IK04
- Class III
- CE certification
- SALT SPRAY TESTED (over 1000 hours)
- Net Weight 1.6kgs
- Rubber cable 1M 2*0.824mm²
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 3 or 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
25 Watt	2100 lm	2700K 3000K 4000K 6000K	10°, 23°, 36°	DC24V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in dark grey as standard or coffee silver, Black, white

Dimension

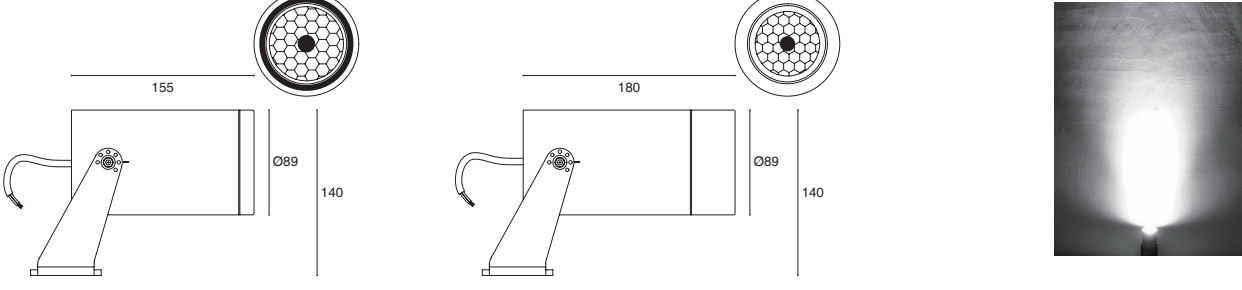

Accessories

