



Indoor Luminaire Photometric Data

Description Information

Luminary Name: 55252		Lum. Catalog:	Test ID:
Lamp Name:		Lamp Catalog:	Test Date: 2025/02/20
Manufacture:		Shld. Ang(°):	Test Machine:GON-2000
Test Lab:		Frequency (Hz):	Lamp CCT(K): 3000 Ra:
Lum. Size(W*L*H):0.050m*-0.050m*0.000m		Lum. Area(m2):0.002	Lum. W(kg): 0.000
Test System: C, γ	Test Step: C=30.0 γ=1.0	Temp.(°C): 25	Humidity(%):

Character Parameter

Lamp Speciality Parameter	Luminaire Speciality Parameter	
Rated Flux(lm): 670.840	Luminary Flux(lm): 670.837	Field Angle(10%Imax): 35.5(°)
Rated Power(W): 24	Luminary Efficiency: 100.00%	Down Lumens&Percent: 670.837lm 100.00%
Rated Voltage(V): 8	Luminary EER(lm/W): 85.024	Up Lumens&Percent: 0.000lm 0.00%
Tested Power(W): 7.890	Max. Candela(cd): 4654.615	S/MH: C0_a180=0.322 C90_270=0.316
Lamps' Inside: 1	Max Cand@Ang.(°): C=30.0 γ=4.0	CIE Type: Semi-Direct
Tested Electrics(V, A, pf):23.9, 0.329	Beam Angle(50%Imax): 17.1(°)	ErP Φ use(90°): 620.839lm
Lamp Size(W*L*H):0.050m*-0.050m*0.000m	Left=-4.5°, Right=12.6°	IRF(%): 1147.168

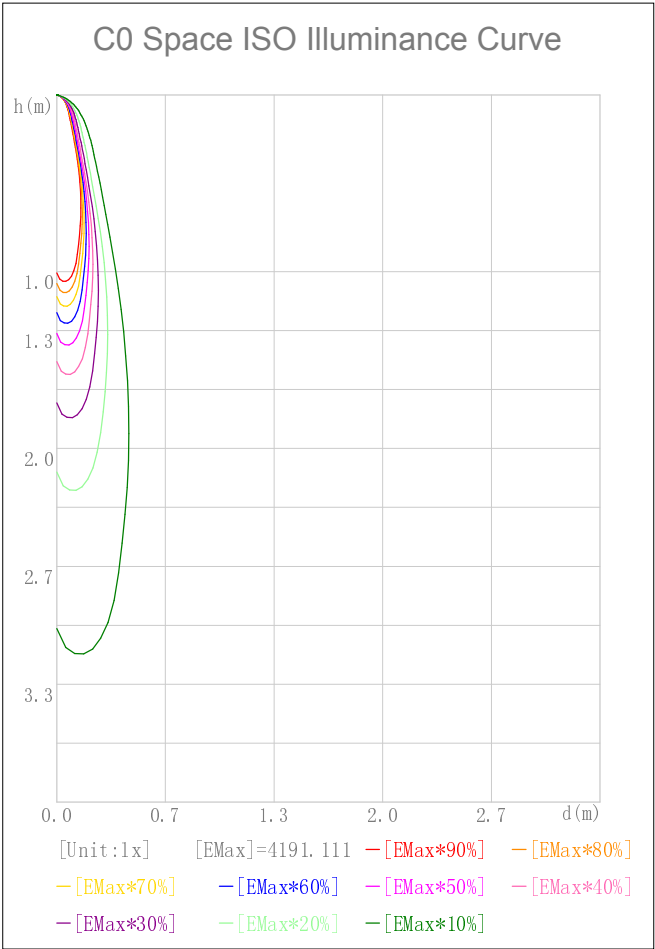
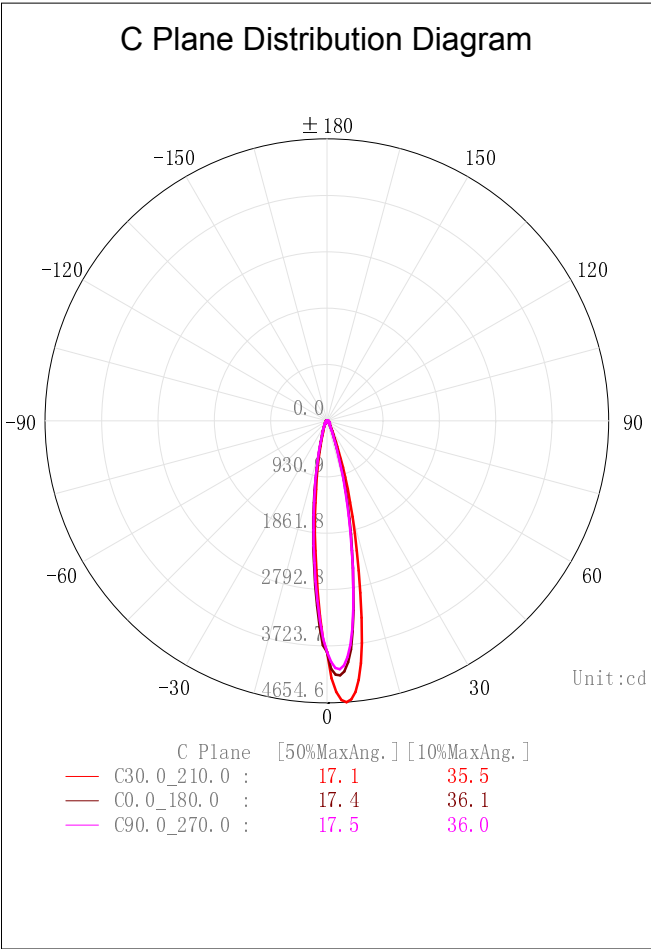



Photometric Filename:SL-8W-COB-0800-M-12D-3000K.IES

2D Plane Light Intensity Distribution Curve

Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/02/20

C Plane Distribution Diagram

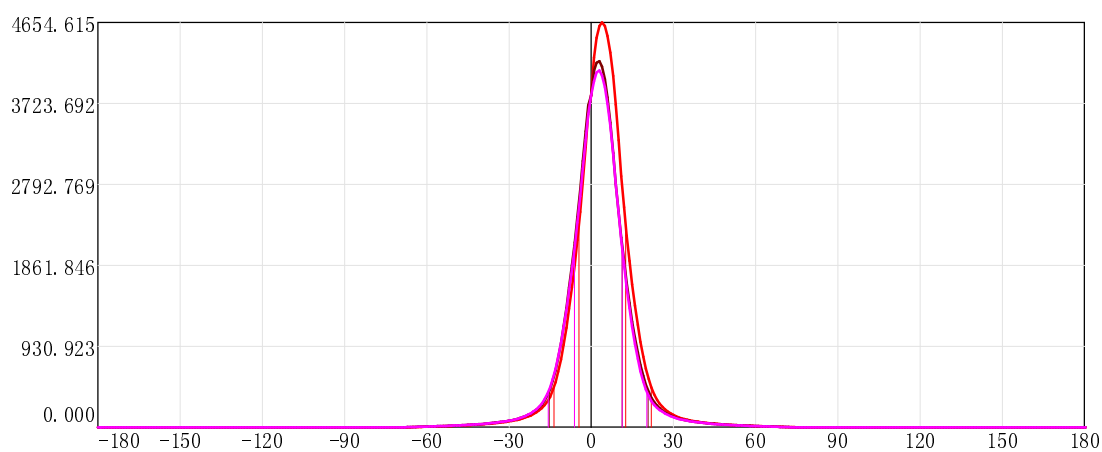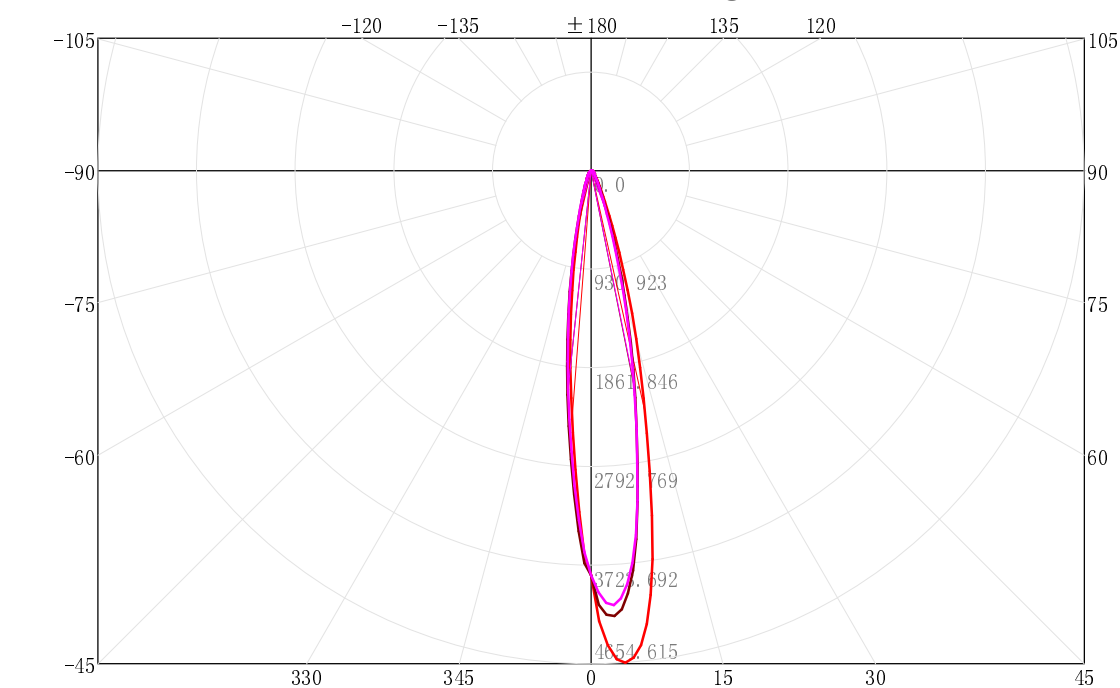


	C Plane	[50%MaxAng.]	[10%MaxAng.]	Unit:cd
	C30.0_210.0 :	17.1	35.5	
	C0.0_180.0 :	17.4	36.1	
	C90.0_270.0 :	17.5	36.0	

3D Light Intensity Distribution Modal

Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/02/20

3D Light Intensity Distribution Modal

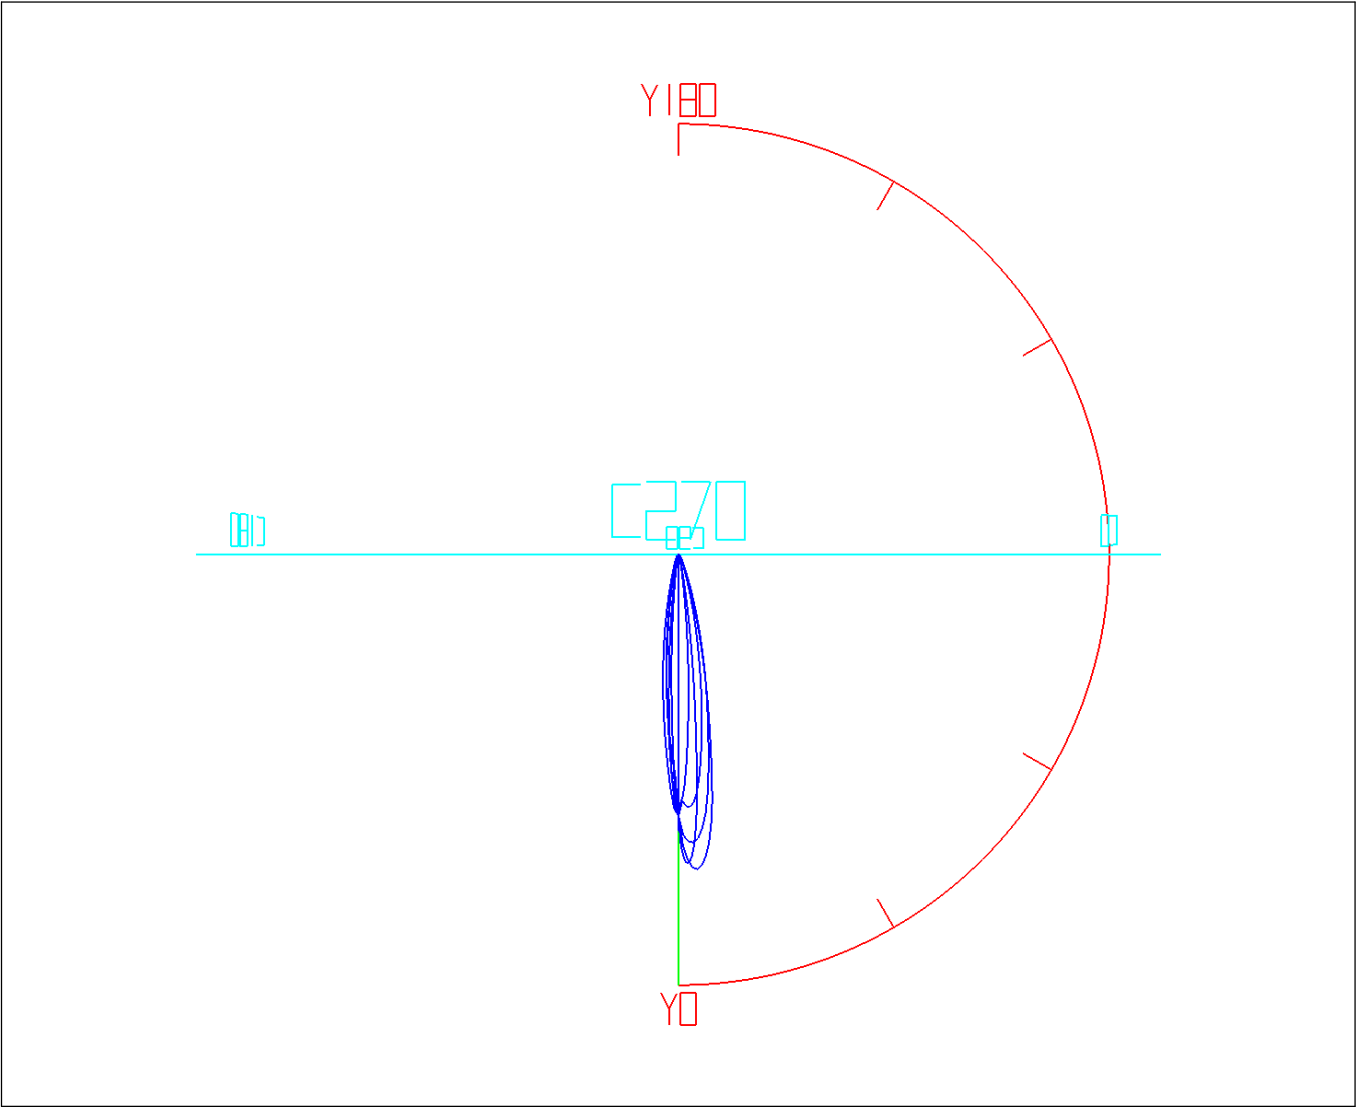

Curves: 3D Model — Fixture — Vert. HUD — Hori. HUD —

View Angles: Orient:0 Tilt:0 Roll:0 Spin:0

Photometric Filename:SL-8W-COB-0800-M-12D-3000K.IES

Zonal Flux Tabulation


Zone(γ)	Zone Flux (1m)	Sums Flux (1m)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (1m)	Sums Flux (1m)	Zone%Lamp	Sums%Lamp
0.0-1.0	3.63	3.63	0.54	0.54	47.0-48.0	2.32	643.63	0.35	95.94
1.0-2.0	10.69	14.32	1.59	2.13	48.0-49.0	2.21	645.84	0.33	96.27
2.0-3.0	17.23	31.55	2.57	4.70	49.0-50.0	2.10	647.93	0.31	96.59
3.0-4.0	23.01	54.57	3.43	8.13	50.0-51.0	1.99	649.92	0.30	96.88
4.0-5.0	27.88	82.45	4.16	12.29	51.0-52.0	1.89	651.81	0.28	97.16
5.0-6.0	31.72	114.17	4.73	17.02	52.0-53.0	1.79	653.60	0.27	97.43
6.0-7.0	34.46	148.62	5.14	22.15	53.0-54.0	1.70	655.30	0.25	97.68
7.0-8.0	36.01	184.63	5.37	27.52	54.0-55.0	1.61	656.91	0.24	97.92
8.0-9.0	36.40	221.03	5.43	32.95	55.0-56.0	1.52	658.43	0.23	98.15
9.0-10.0	35.77	256.80	5.33	38.28	56.0-57.0	1.43	659.86	0.21	98.36
10.0-11.0	34.35	291.15	5.12	43.40	57.0-58.0	1.34	661.21	0.20	98.56
11.0-12.0	32.41	323.56	4.83	48.23	58.0-59.0	1.25	662.46	0.19	98.75
12.0-13.0	30.15	353.71	4.50	52.73	59.0-60.0	1.16	663.62	0.17	98.92
13.0-14.0	27.71	381.42	4.13	56.86	60.0-61.0	1.07	664.70	0.16	99.08
14.0-15.0	25.16	406.58	3.75	60.61	61.0-62.0	0.98	665.68	0.15	99.23
15.0-16.0	22.62	429.20	3.37	63.98	62.0-63.0	0.89	666.57	0.13	99.36
16.0-17.0	20.17	449.37	3.01	66.99	63.0-64.0	0.81	667.38	0.12	99.48
17.0-18.0	17.87	467.24	2.66	69.65	64.0-65.0	0.71	668.09	0.11	99.59
18.0-19.0	15.79	483.03	2.35	72.00	65.0-66.0	0.62	668.71	0.09	99.68
19.0-20.0	13.96	496.99	2.08	74.08	66.0-67.0	0.53	669.24	0.08	99.76
20.0-21.0	12.37	509.36	1.84	75.93	67.0-68.0	0.43	669.67	0.06	99.83
21.0-22.0	11.01	520.37	1.64	77.57	68.0-69.0	0.34	670.01	0.05	99.88
22.0-23.0	9.86	530.23	1.47	79.04	69.0-70.0	0.27	670.28	0.04	99.92
23.0-24.0	8.90	539.13	1.33	80.37	70.0-71.0	0.21	670.49	0.03	99.95
24.0-25.0	8.12	547.25	1.21	81.58	71.0-72.0	0.15	670.64	0.02	99.97
25.0-26.0	7.46	554.71	1.11	82.69	72.0-73.0	0.10	670.75	0.02	99.99
26.0-27.0	6.90	561.60	1.03	83.72	73.0-74.0	0.06	670.81	0.01	99.99
27.0-28.0	6.41	568.02	0.96	84.67	74.0-75.0	0.03	670.83	0.00	100.00
28.0-29.0	5.99	574.00	0.89	85.56	75.0-76.0	0.01	670.84	0.00	100.00
29.0-30.0	5.60	579.60	0.83	86.40	76.0-77.0	0.00	670.84	0.00	100.00
30.0-31.0	5.26	584.87	0.78	87.18	77.0-78.0	0.00	670.84	0.00	100.00
31.0-32.0	4.96	589.83	0.74	87.92	78.0-79.0	0.00	670.84	0.00	100.00
32.0-33.0	4.70	594.53	0.70	88.62	79.0-80.0	0.00	670.84	0.00	100.00
33.0-34.0	4.46	598.99	0.66	89.29	80.0-81.0	0.00	670.84	0.00	100.00
34.0-35.0	4.24	603.23	0.63	89.92	81.0-82.0	0.00	670.84	0.00	100.00
35.0-36.0	4.05	607.28	0.60	90.53	82.0-83.0	0.00	670.84	0.00	100.00
36.0-37.0	3.86	611.15	0.58	91.10	83.0-84.0	0.00	670.84	0.00	100.00
37.0-38.0	3.68	614.83	0.55	91.65	84.0-85.0	0.00	670.84	0.00	100.00
38.0-39.0	3.52	618.35	0.52	92.17	85.0-86.0	0.00	670.84	0.00	100.00
39.0-40.0	3.36	621.70	0.50	92.68	86.0-87.0	0.00	670.84	0.00	100.00
40.0-41.0	3.20	624.91	0.48	93.15	87.0-88.0	0.00	670.84	0.00	100.00
41.0-42.0	3.06	627.96	0.46	93.61	88.0-89.0	0.00	670.84	0.00	100.00
42.0-43.0	2.92	630.88	0.44	94.04	89.0-90.0	0.00	670.84	0.00	100.00
43.0-44.0	2.79	633.67	0.42	94.46	90.0-91.0	0.00	670.84	0.00	100.00
44.0-45.0	2.66	636.34	0.40	94.86	91.0-92.0	0.00	670.84	0.00	100.00
45.0-46.0	2.55	638.88	0.38	95.24	92.0-93.0	0.00	670.84	0.00	100.00
46.0-47.0	2.43	641.31	0.36	95.60	93.0-94.0	0.00	670.84	0.00	100.00

Photometric Filename:SL-8W-COB-0800-M-12D-3000K.IES

Zone(γ)	Zone Flux (1m)	Sums Flux (1m)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (1m)	Sums Flux (1m)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.00	670.84	0.00	100.00	141.0-142.0	0.00	670.84	0.00	100.00
95.0-96.0	0.00	670.84	0.00	100.00	142.0-143.0	0.00	670.84	0.00	100.00
96.0-97.0	0.00	670.84	0.00	100.00	143.0-144.0	0.00	670.84	0.00	100.00
97.0-98.0	0.00	670.84	0.00	100.00	144.0-145.0	0.00	670.84	0.00	100.00
98.0-99.0	0.00	670.84	0.00	100.00	145.0-146.0	0.00	670.84	0.00	100.00
99.0-100.0	0.00	670.84	0.00	100.00	146.0-147.0	0.00	670.84	0.00	100.00
100.0-101.0	0.00	670.84	0.00	100.00	147.0-148.0	0.00	670.84	0.00	100.00
101.0-102.0	0.00	670.84	0.00	100.00	148.0-149.0	0.00	670.84	0.00	100.00
102.0-103.0	0.00	670.84	0.00	100.00	149.0-150.0	0.00	670.84	0.00	100.00
103.0-104.0	0.00	670.84	0.00	100.00	150.0-151.0	0.00	670.84	0.00	100.00
104.0-105.0	0.00	670.84	0.00	100.00	151.0-152.0	0.00	670.84	0.00	100.00
105.0-106.0	0.00	670.84	0.00	100.00	152.0-153.0	0.00	670.84	0.00	100.00
106.0-107.0	0.00	670.84	0.00	100.00	153.0-154.0	0.00	670.84	0.00	100.00
107.0-108.0	0.00	670.84	0.00	100.00	154.0-155.0	0.00	670.84	0.00	100.00
108.0-109.0	0.00	670.84	0.00	100.00	155.0-156.0	0.00	670.84	0.00	100.00
109.0-110.0	0.00	670.84	0.00	100.00	156.0-157.0	0.00	670.84	0.00	100.00
110.0-111.0	0.00	670.84	0.00	100.00	157.0-158.0	0.00	670.84	0.00	100.00
111.0-112.0	0.00	670.84	0.00	100.00	158.0-159.0	0.00	670.84	0.00	100.00
112.0-113.0	0.00	670.84	0.00	100.00	159.0-160.0	0.00	670.84	0.00	100.00
113.0-114.0	0.00	670.84	0.00	100.00	160.0-161.0	0.00	670.84	0.00	100.00
114.0-115.0	0.00	670.84	0.00	100.00	161.0-162.0	0.00	670.84	0.00	100.00
115.0-116.0	0.00	670.84	0.00	100.00	162.0-163.0	0.00	670.84	0.00	100.00
116.0-117.0	0.00	670.84	0.00	100.00	163.0-164.0	0.00	670.84	0.00	100.00
117.0-118.0	0.00	670.84	0.00	100.00	164.0-165.0	0.00	670.84	0.00	100.00
118.0-119.0	0.00	670.84	0.00	100.00	165.0-166.0	0.00	670.84	0.00	100.00
119.0-120.0	0.00	670.84	0.00	100.00	166.0-167.0	0.00	670.84	0.00	100.00
120.0-121.0	0.00	670.84	0.00	100.00	167.0-168.0	0.00	670.84	0.00	100.00
121.0-122.0	0.00	670.84	0.00	100.00	168.0-169.0	0.00	670.84	0.00	100.00
122.0-123.0	0.00	670.84	0.00	100.00	169.0-170.0	0.00	670.84	0.00	100.00
123.0-124.0	0.00	670.84	0.00	100.00	170.0-171.0	0.00	670.84	0.00	100.00
124.0-125.0	0.00	670.84	0.00	100.00	171.0-172.0	0.00	670.84	0.00	100.00
125.0-126.0	0.00	670.84	0.00	100.00	172.0-173.0	0.00	670.84	0.00	100.00
126.0-127.0	0.00	670.84	0.00	100.00	173.0-174.0	0.00	670.84	0.00	100.00
127.0-128.0	0.00	670.84	0.00	100.00	174.0-175.0	0.00	670.84	0.00	100.00
128.0-129.0	0.00	670.84	0.00	100.00					

Rectangle ISO Lighting Intensity Diagram


Lum. Name:55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/02/20

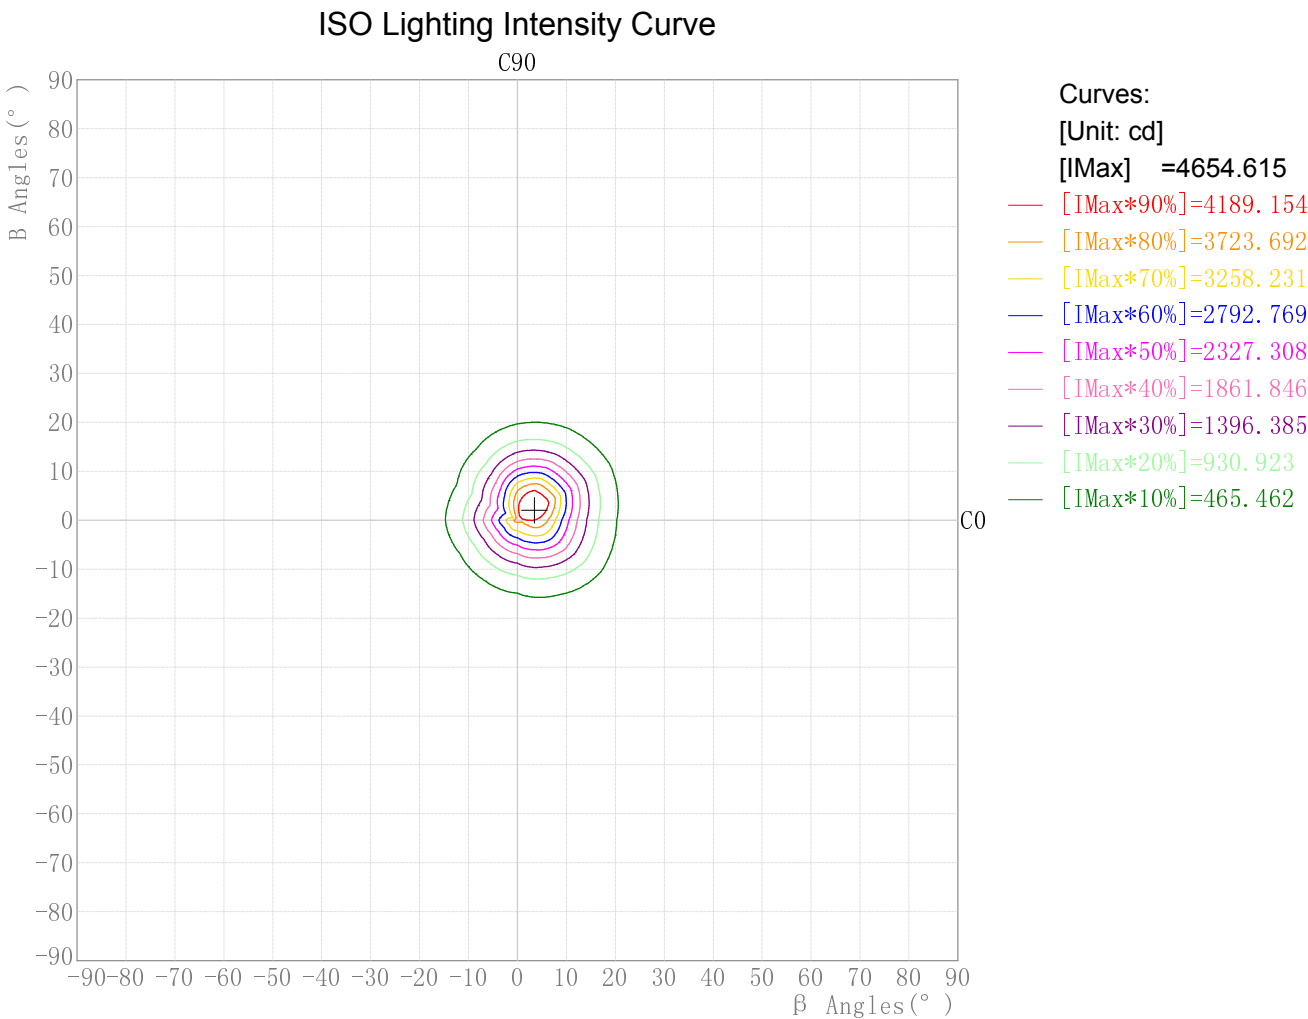

Maximum Light Intensity(cd): 4654.62
Maximum Cand.@Angle: H=3.5°,V=2.0°

Plane ISO-Illuminance Diagram

Lum. Name:55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/02/20

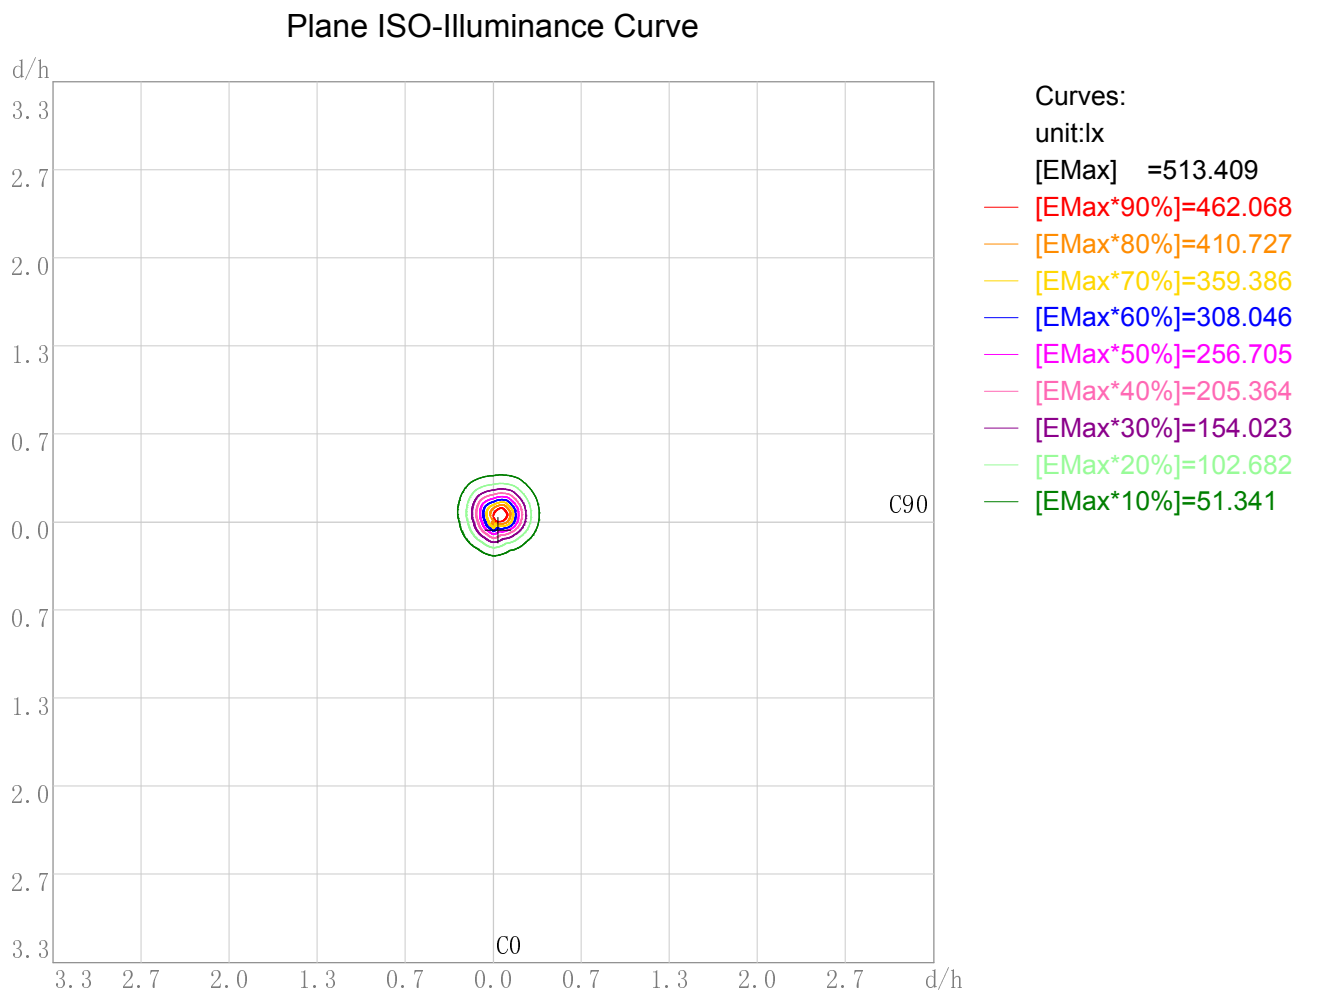


Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 513.41
Working Plane Maximum Illuminance Position(d/h):H0.0 V0.1

3D Plane ISO Illuminance Diagram

Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/02/20


3D Plane Illuminance Modal

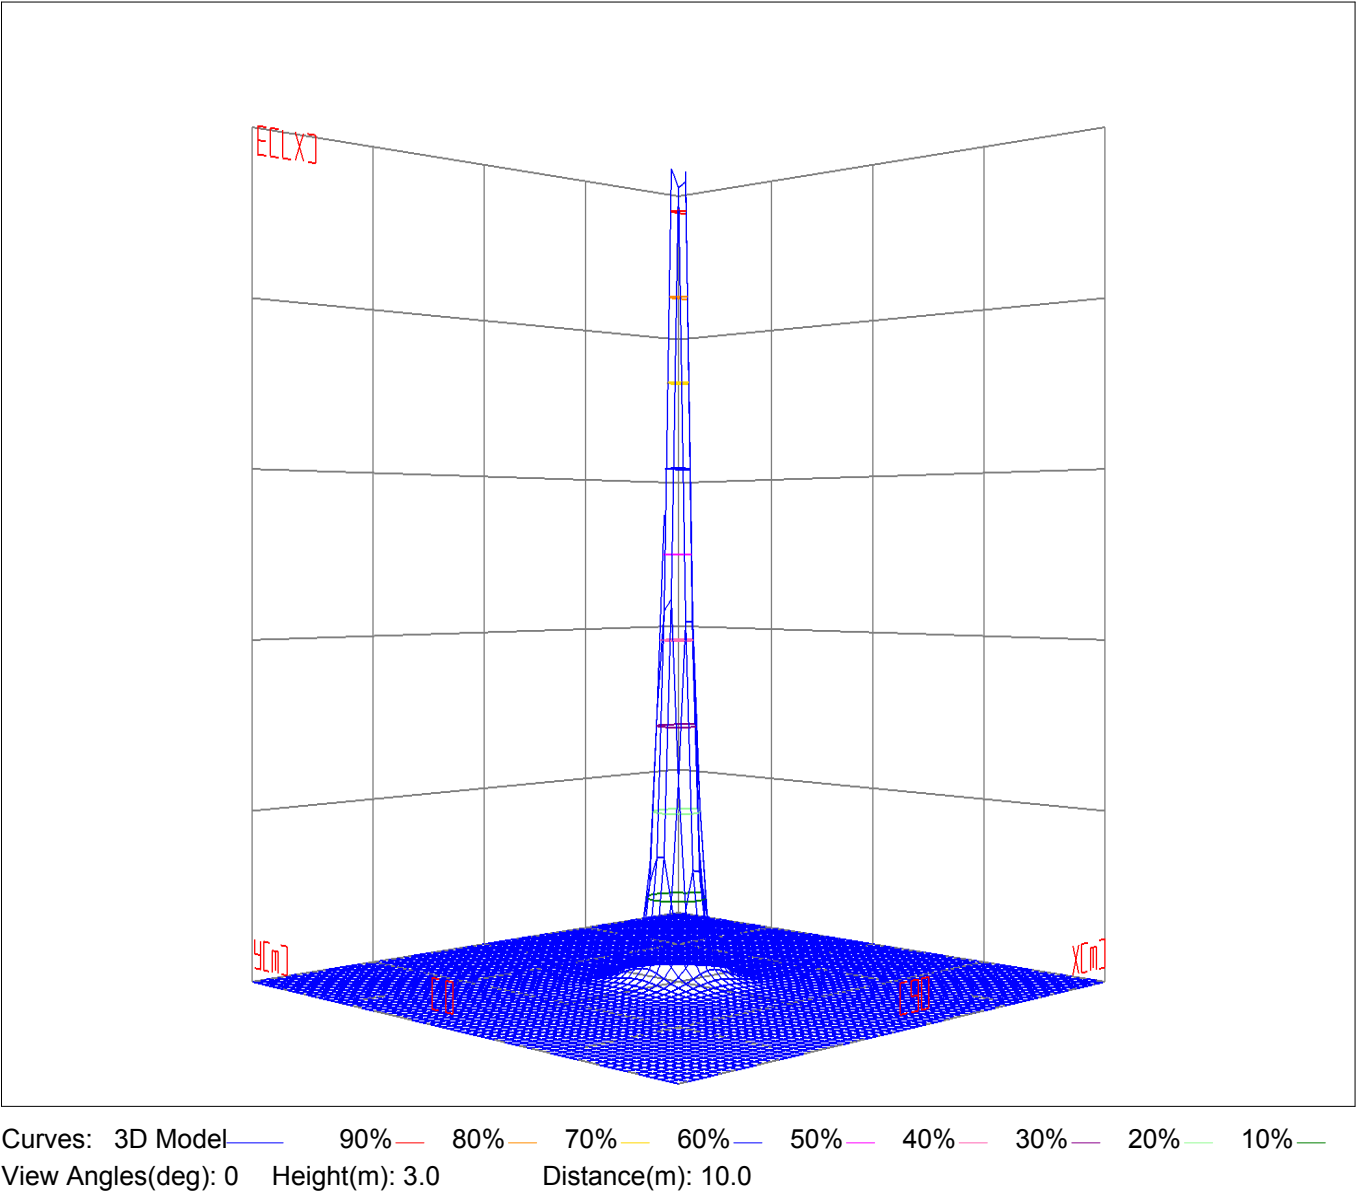

Space ISO Illuminance Diagram

Lum. Name:55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/02/20


Space ISO Illuminance Curve

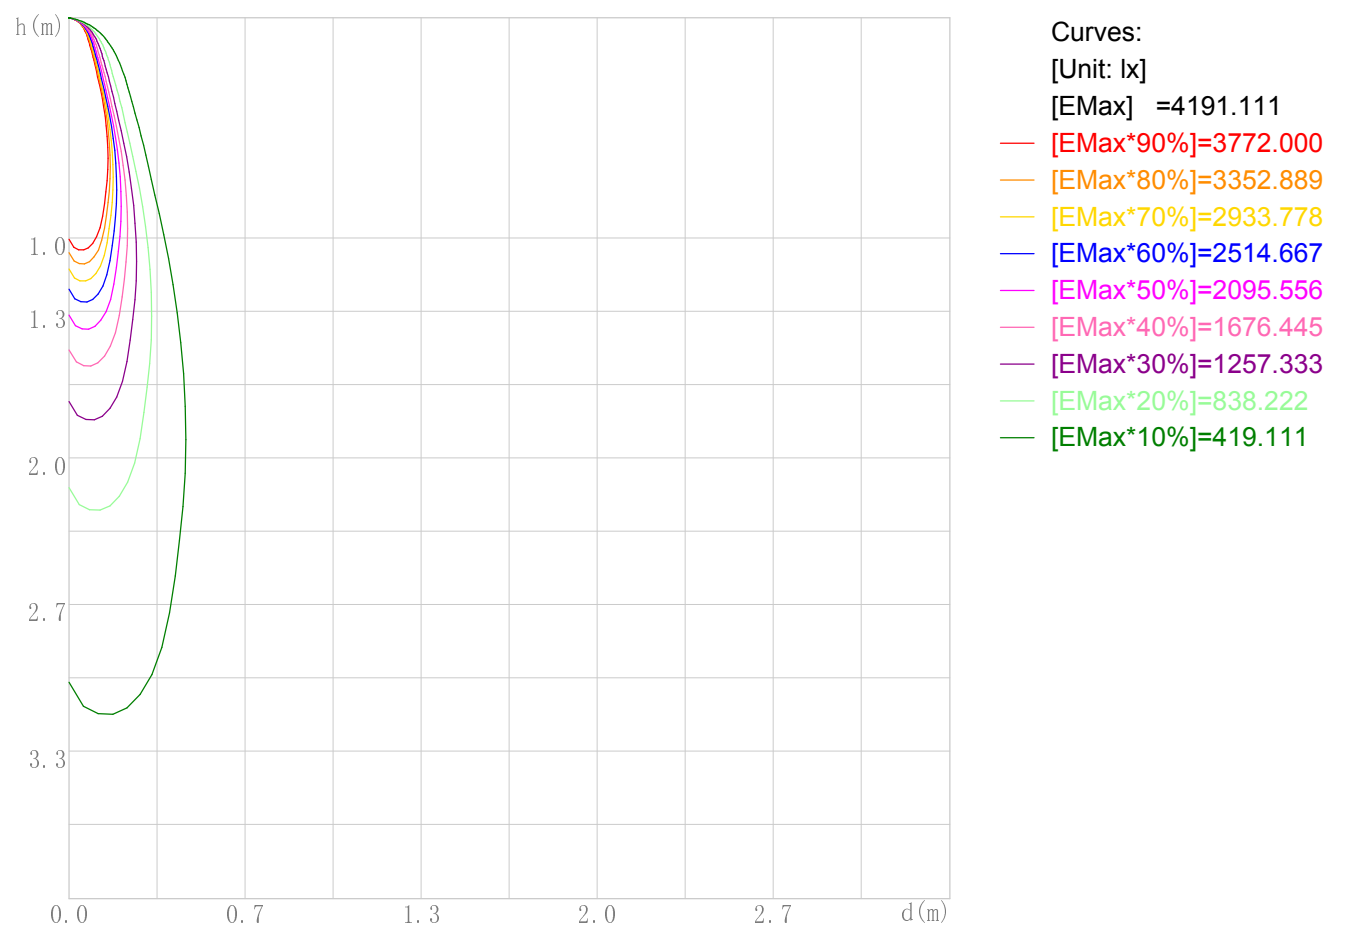

Space Plane Maximum Illuminance and @Angle:4191.11lx,3.0deg
Plane Maximum Lighting Intensity and @Angle:4208.390cd,0eg

Illuminance-Distance Diagram

Lum. Name:55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/02/20

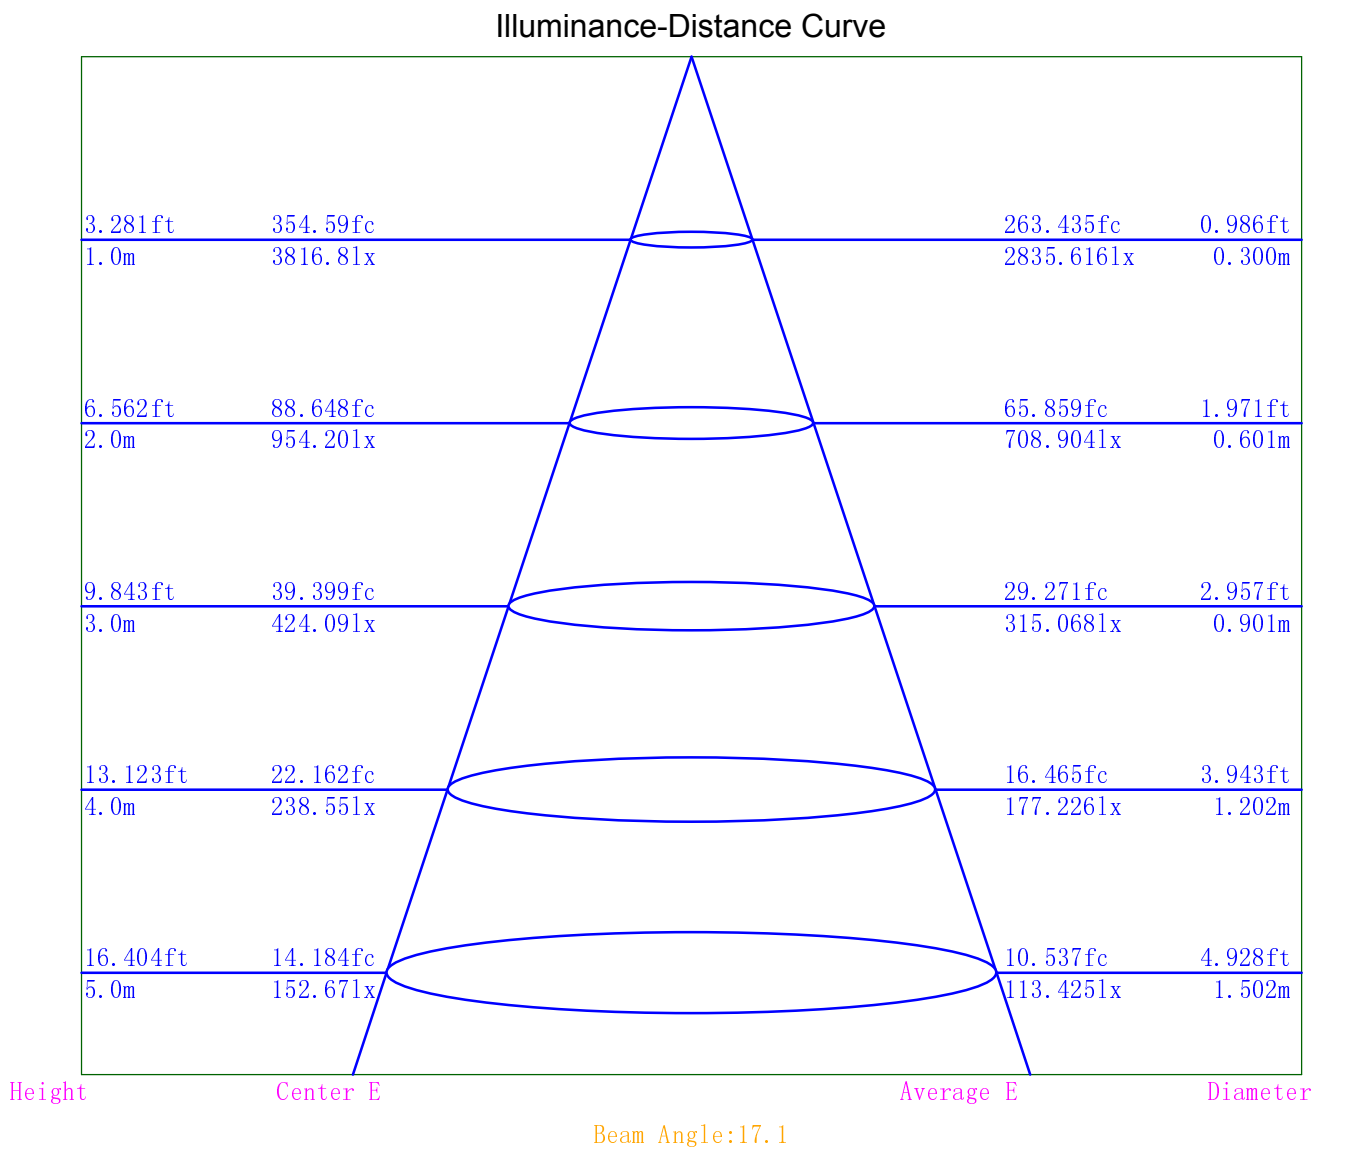

Indoor Luminance Limiting Curves

Lum. Name:55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date:2025/02/20


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama (deg)	45	50	55	60	65	70	75	80	85
C0	28701	23118	18895	15265	11538	6573	0	0	0
C90	27796	22409	18168	14351	11142	6259	0	0	0

Luminance Limiting Curve

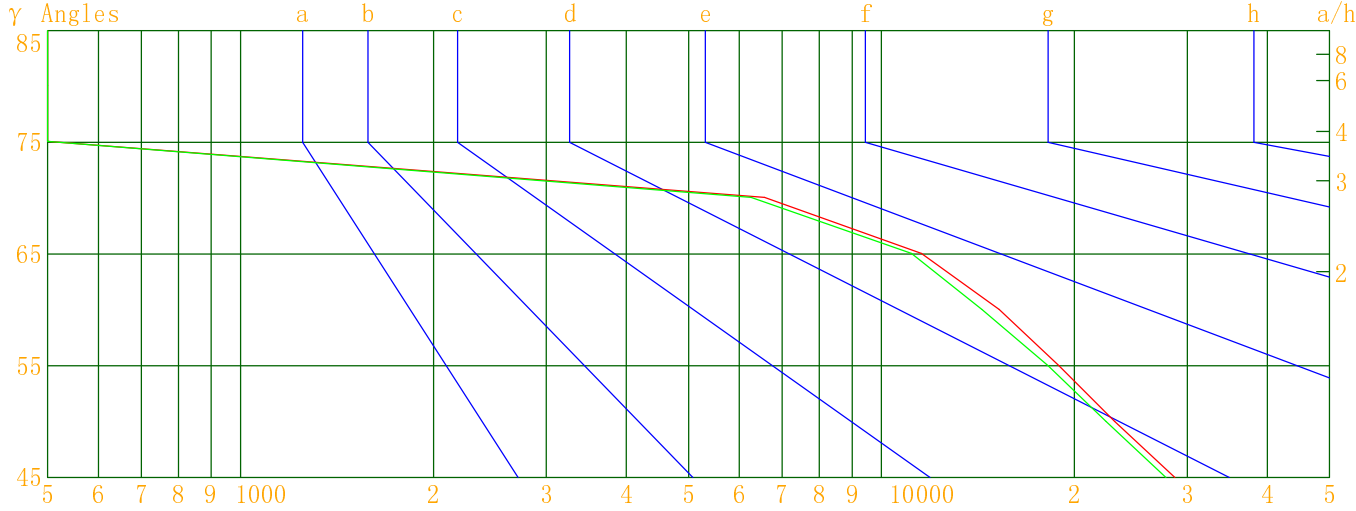


Luminous Size:Length(m)=-0.050Width(m)=-0.050Height(m)=0.000Area(m^2)=0.001963

Luminous Type:Without Luminous Side

Luminous Curves:C0-C180 Color: C90-C270 Color:

Indoor Budgetary Estimate Table

Lum. Name:55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/02/20

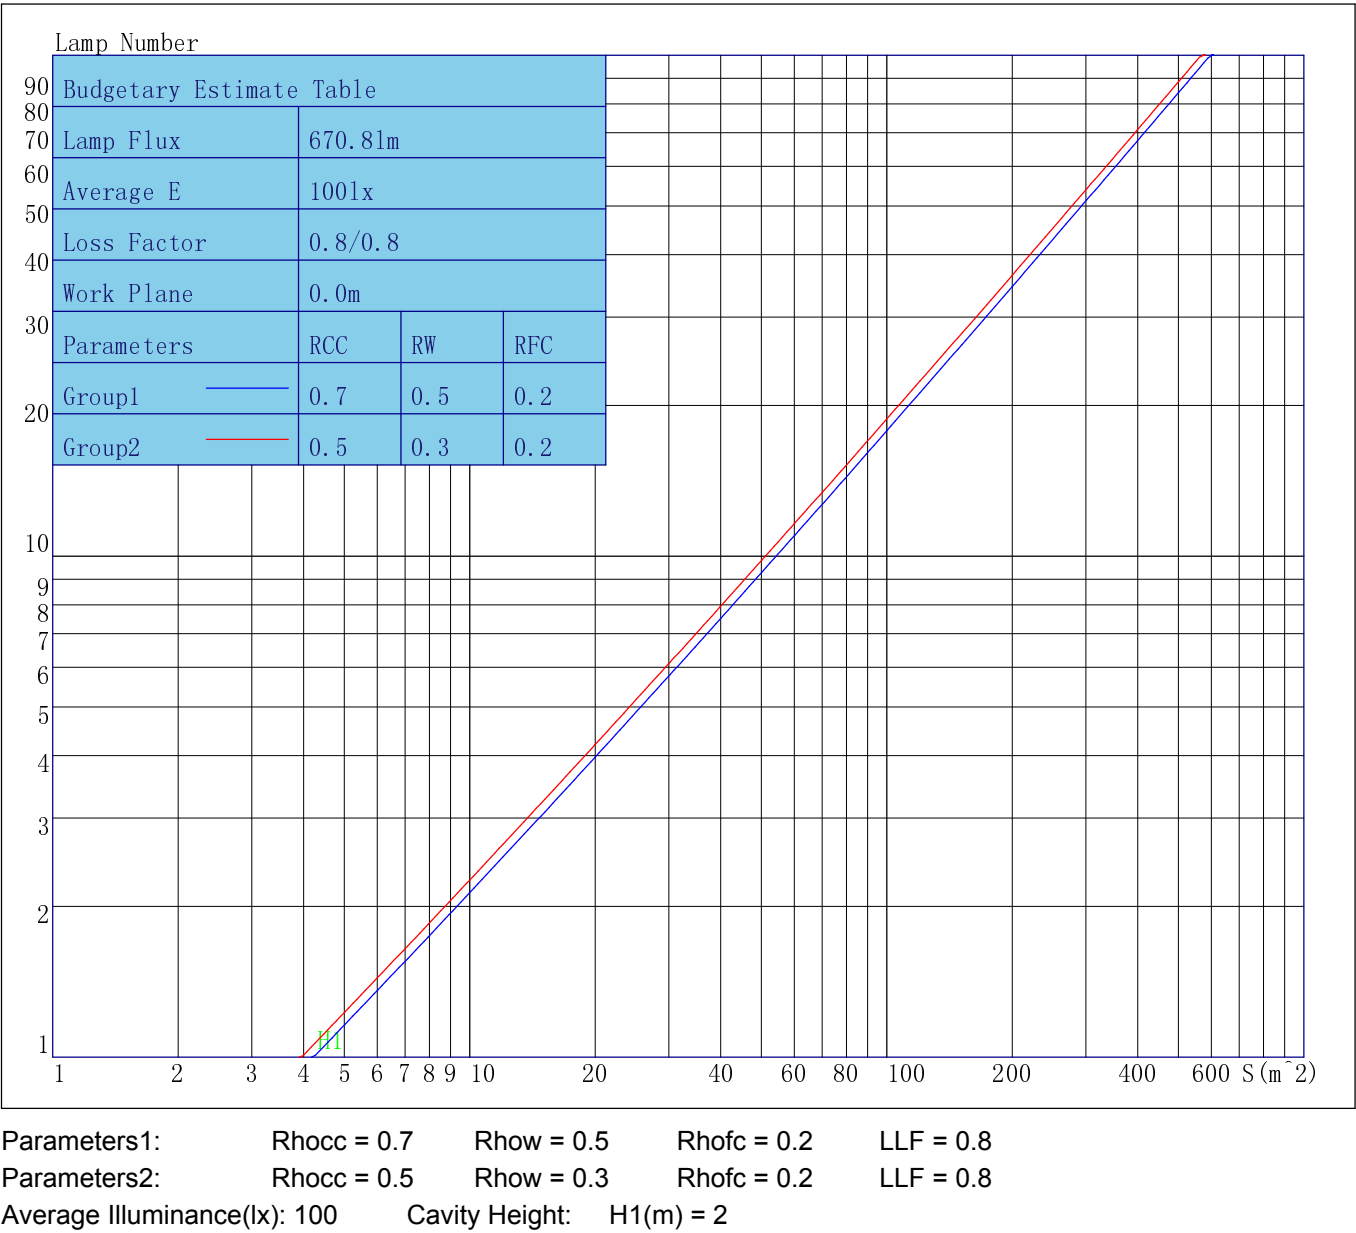

Indoor Coefficient of Utilization Table

Lum. Name:55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/02/20

Coefficients of Utilization – Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	112	110	109	112	110	108	107	106	105	104	103	102	101	99	98	98	96
2	110	107	103	101	108	105	102	100	102	99	97	99	97	95	96	95	93	92
3	107	101	98	94	105	100	97	94	98	95	92	95	93	91	93	91	90	88
4	103	97	93	90	101	96	92	89	94	91	88	92	89	87	90	88	86	85
5	100	93	89	85	98	92	88	85	91	87	84	89	86	84	88	85	83	82
6	96	90	85	82	95	89	85	82	88	84	81	86	83	81	85	82	80	79
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77
8	91	84	79	76	90	83	79	76	82	79	76	81	78	76	81	78	75	74
9	88	81	77	74	87	81	77	74	80	76	74	79	76	73	79	76	73	72
10	86	79	75	72	85	79	75	72	78	74	72	77	74	72	77	74	71	70

Unified Glare Rating Table

Lum. Name:55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/02/20

Unified Glare Rating Table

Ceiling RCC		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size		Vewed crosswise					Vewed endwise				
X=2H	Y=2H	18.3	19.4	18.7	19.7	20.0	17.9	18.9	18.2	19.2	19.5
	Y=3H	18.6	19.5	19.0	19.8	20.2	18.1	19.0	18.5	19.3	19.7
	Y=4H	18.5	19.3	18.9	19.7	20.1	18.0	18.8	18.4	19.2	19.6
	Y=6H	18.4	19.2	18.8	19.5	19.9	17.9	18.6	18.3	19.0	19.4
	Y=8H	18.3	19.1	18.8	19.4	19.9	17.8	18.5	18.2	18.9	19.3
	Y=12H	18.3	19.0	18.7	19.3	19.8	17.8	18.5	18.2	18.8	19.3
X=4H	Y=2H	18.4	19.3	18.8	19.6	20.0	17.9	18.8	18.3	19.1	19.5
	Y=3H	18.7	19.4	19.1	19.8	20.2	18.2	18.9	18.6	19.3	19.7
	Y=4H	18.6	19.2	19.0	19.7	20.1	18.1	18.7	18.5	19.1	19.6
	Y=6H	18.5	19.0	19.0	19.5	20.0	17.9	18.5	18.4	18.9	19.4
	Y=8H	18.4	18.9	18.9	19.4	19.9	17.9	18.4	18.3	18.8	19.3
	Y=12H	18.4	18.8	18.9	19.3	19.8	17.8	18.3	18.3	18.7	19.2
X=8H	Y=4H	18.4	19.0	18.9	19.4	19.9	17.9	18.4	18.4	18.9	19.3
	Y=6H	18.3	18.7	18.8	19.2	19.8	17.8	18.2	18.3	18.7	19.2
	Y=8H	18.2	18.6	18.8	19.1	19.6	17.7	18.1	18.2	18.6	19.1
	Y=12H	18.2	18.5	18.7	19.0	19.6	17.6	18.0	18.2	18.5	19.0
X=12H	Y=4H	18.4	18.8	18.9	19.3	19.8	17.8	18.3	18.3	18.8	19.2
	Y=6H	18.3	18.6	18.8	19.1	19.6	17.7	18.1	18.2	18.5	19.1
	Y=8H	18.2	18.5	18.7	19.0	19.6	17.6	18.0	18.2	18.5	19.0
Variations with the objverver position at spacings											
S=1.0H		0.0/0.0					0.0/0.0				
S=1.5H		5.8/0.0					5.7/0.0				
S=2.0H		4.5/0.0					4.8/0.0				
Reduced UGR Table:											
Nordic Standard Table:		BK0					BK0				
Correction Value		0.5					0.4				

o the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

IES Indoor Report

Photometric Filename:SL-8W-COB-0800-M-12D-3000K.IES

Candela Tabulation

V/H	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0	C300.0	C330.0
γ 0.0	3816.81	3816.81	3816.81	3816.81	3816.81	3816.81	3816.81	3816.81	3816.81	3816.81	3816.81	3816.81
γ 1.0	4097.88	4250.79	4281.22	3979.04	3608.72	3228.65	3702.48	3627.99	3695.83	3599.97	3608.95	3584.71
γ 2.0	4190.51	4478.47	4471.60	4079.68	3515.73	2979.56	3403.95	3221.75	3308.66	3302.59	3502.75	3658.96
γ 3.0	4208.39	4615.70	4578.21	4103.21	3355.45	2722.60	3060.36	2825.44	2909.96	2975.70	3329.44	3661.62
γ 4.0	4146.73	4654.62	4597.21	4045.21	3136.89	2466.33	2729.66	2475.85	2552.10	2657.67	3102.95	3595.48
γ 5.0	4001.60	4612.94	4537.91	3913.03	2880.50	2203.84	2418.68	2153.31	2224.84	2356.27	2841.62	3459.39
γ 6.0	3791.98	4499.98	4411.48	3719.60	2613.74	1946.86	2125.76	1871.49	1934.67	2075.58	2574.65	3258.51
γ 7.0	3503.71	4308.63	4199.83	3464.60	2340.35	1700.49	1860.88	1606.72	1668.45	1815.26	2312.08	3011.96
γ 8.0	3152.45	4041.56	3929.61	3137.79	2070.89	1472.65	1607.15	1365.60	1424.55	1569.56	2066.67	2739.15
γ 9.0	2795.67	3710.80	3578.79	2788.87	1818.79	1260.79	1373.43	1144.80	1206.21	1349.97	1826.95	2464.50
γ 10.0	2470.49	3301.75	3159.11	2464.68	1577.64	1065.81	1159.92	950.74	1011.60	1150.98	1598.38	2207.68
γ 11.0	2181.97	2889.81	2758.47	2153.13	1352.51	885.79	967.16	781.75	839.25	970.50	1385.17	1963.21
γ 12.0	1916.24	2530.98	2406.28	1869.51	1145.81	729.40	798.23	638.53	689.98	811.22	1186.90	1723.78
γ 13.0	1662.65	2205.07	2084.69	1609.65	958.05	599.83	653.97	520.39	565.12	672.29	1009.00	1503.97
γ 14.0	1428.16	1913.47	1795.64	1370.34	793.17	493.78	536.92	425.14	463.27	554.23	854.49	1301.03
γ 15.0	1215.10	1643.09	1526.59	1154.17	653.88	407.90	441.28	350.68	381.16	458.88	717.41	1114.75
γ 16.0	1026.81	1397.71	1287.28	958.15	539.83	339.84	364.99	294.31	317.43	381.32	599.64	951.20
γ 17.0	861.35	1177.17	1076.40	785.79	445.27	287.61	306.41	252.09	269.62	319.78	499.40	802.43
γ 18.0	716.27	982.09	891.53	642.65	369.29	248.41	261.77	220.01	233.35	272.65	415.02	670.99
γ 19.0	593.12	814.18	733.80	527.57	309.64	218.65	228.38	193.95	205.02	236.29	348.15	558.71
γ 20.0	490.79	673.35	602.63	434.81	265.07	194.41	201.77	172.01	181.10	207.82	296.07	464.51
γ 21.0	407.24	557.17	496.21	360.43	231.13	173.46	179.03	153.53	160.99	183.77	255.71	387.31
γ 22.0	340.56	460.07	409.84	302.49	204.68	155.28	159.77	137.97	143.97	162.98	223.99	326.30
γ 23.0	289.59	380.38	340.82	259.22	182.42	139.61	143.29	124.22	129.41	145.57	197.27	278.73
γ 24.0	250.30	317.89	287.73	226.15	162.94	126.02	129.18	112.41	116.72	130.59	174.02	242.20
γ 25.0	219.28	270.84	247.40	199.93	146.06	114.48	116.79	102.00	106.04	117.58	154.53	211.96
γ 26.0	192.74	234.91	215.85	178.88	131.66	104.28	106.21	93.24	96.59	106.48	137.96	186.27
γ 27.0	170.10	206.28	190.64	159.83	119.30	95.44	96.77	86.13	89.12	96.95	123.58	164.71
γ 28.0	151.12	181.93	169.30	143.38	108.60	88.30	89.39	79.46	82.50	89.58	111.64	146.27
γ 29.0	134.68	160.98	151.22	128.96	99.09	81.61	82.74	73.43	76.20	82.73	101.28	130.88
γ 30.0	120.85	143.07	135.81	116.68	91.15	75.63	76.45	68.25	70.81	76.52	92.83	117.44
γ 31.0	108.97	127.96	122.50	106.28	84.61	70.16	70.95	63.40	65.98	71.18	85.63	106.20
γ 32.0	98.74	115.15	111.13	97.22	78.12	65.71	66.21	58.99	61.53	66.39	79.24	96.82
γ 33.0	90.73	104.13	101.16	89.72	72.39	61.42	61.75	54.99	57.22	61.81	73.67	89.53
γ 34.0	83.96	94.61	92.45	83.18	67.53	57.36	57.68	51.23	53.24	57.50	68.77	82.71
γ 35.0	77.55	87.19	85.91	77.09	63.34	53.58	53.77	47.96	49.59	53.34	64.16	76.40
γ 36.0	72.03	80.64	79.73	71.65	59.38	50.19	50.31	44.80	46.24	49.94	59.71	71.27
γ 37.0	67.14	74.55	73.78	66.79	55.52	46.89	47.07	41.66	43.03	46.85	55.55	66.46
γ 38.0	62.80	69.21	68.82	62.60	51.85	43.65	43.99	38.77	40.04	43.73	51.90	61.80
γ 39.0	58.48	64.57	64.47	58.78	48.52	40.49	41.04	36.13	37.41	40.91	48.72	57.49
γ 40.0	54.48	60.23	60.32	54.88	45.37	37.65	38.33	33.76	35.17	38.21	45.97	53.67
γ 41.0	51.00	55.80	56.17	51.23	42.02	35.19	35.71	31.80	33.13	35.78	43.34	50.23
γ 42.0	47.79	51.89	52.13	47.76	39.11	32.93	33.47	29.99	31.28	33.66	40.98	47.15
γ 43.0	44.94	48.44	48.50	44.38	36.54	30.86	31.57	28.31	29.44	31.73	38.51	44.37
γ 44.0	42.21	45.44	45.09	41.32	34.13	29.06	29.76	26.56	27.70	29.91	35.98	41.79
γ 45.0	39.85	42.66	42.04	38.59	32.18	27.40	28.03	25.03	26.11	28.09	33.68	39.45
γ 46.0	37.58	39.96	39.25	36.09	30.30	25.73	26.36	23.48	24.54	26.41	31.61	37.33

IES Indoor Report

Photometric Filename:SL-8W-COB-0800-M-12D-3000K.IES

Candela Tabulation - (Cont.)

[illegible]

Photometric Filename:SL-8W-COB-0800-M-12D-3000K.IES

[illegible]

Photometric Filename:SL-8W-COB-0800-M-12D-3000K.IES

[illegible]