

## Moon 6W

MN06W

-  IP65
-  IK04
-  Class III
-  CE certification
-  ETL certification
-  SALT SPRAY TESTED (over 1000 hours)
-  Net Weight 0.35kgs
-  PVC cable 0.3M 2\*20#
-  CREE COB LED
-  SDCM<5
-  Ra≥80
-  3 or 5 Years Warranty




Electrophoresis + Painted available colour for housing:



### General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
6 Watt	430 lm	2700K 3000K 4000K 6000K	10°, 15°, 24°, 36°, 60°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in coffee silver as standard or dark grey, Black, white

### Dimension

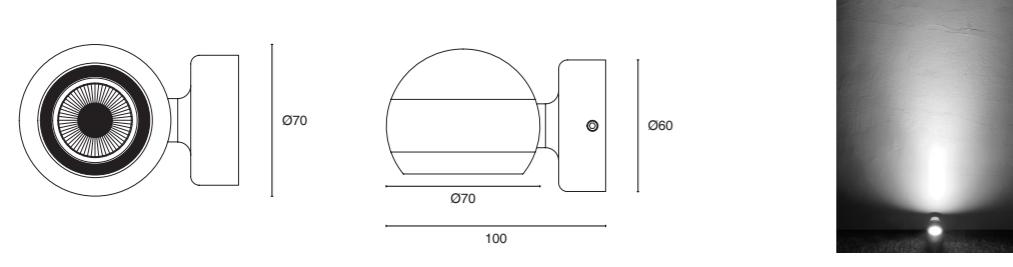

### Accessories

Mounting base



Included

## Moon 6WD

MN06WD

-  IP65
-  IK04
-  Class III
-  CE certification
-  ETL certification
-  SALT SPRAY TESTED (over 1000 hours)
-  Net Weight 0.34kgs
-  PVC cable 0.3M 2\*20#
-  CREE COB LED
-  SDCM<5
-  Ra≥80
-  3 or 5 Years Warranty




Electrophoresis + Painted available colour for housing:



### General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
6 Watt	580 lm	2700K 3000K 4000K 6000K	10°, 15°, 24°, 36°, 60°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in coffee silver as standard or dark grey, Black, white

### Dimension

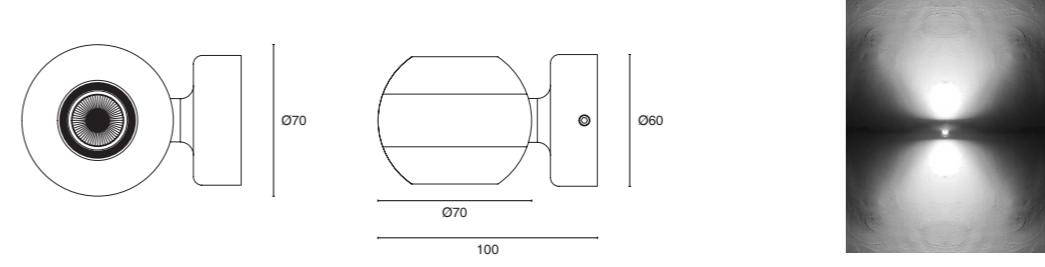

### Accessories

Mounting base



Included

## Moon 10W

MN10W

-  IP65
-  IK04
-  Class III
-  CE certification
-  ETL certification
-  SALT SPRAY TESTED (over 1000 hours)
-  Net Weight 0.63kgs
-  Rubber cable 0.3M 2\*0.824 mm<sup>2</sup>
-  CREE COB LED
-  SDCM<5
-  Ra≥80
-  3 or 5 Years Warranty




Electrophoresis + Painted available colour for housing:



### General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
10 Watt	730 lm	2700K 3000K 4000K 6000K	10°, 15°, 24°, 36°, 60°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in coffee silver as standard or dark grey, Black, white

### Dimension

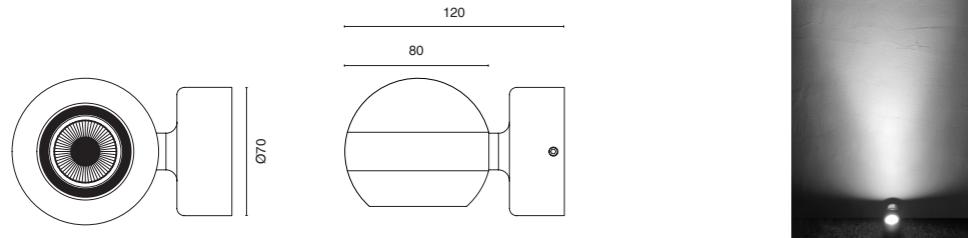

### Accessories

Mounting base



Included

## Moon 10WD

MN10WD

-  IP65
-  IK04
-  Class III
-  CE certification
-  ETL certification
-  SALT SPRAY TESTED (over 1000 hours)
-  Net Weight 0.6kgs
-  Rubber cable 0.3M 2\*0.824 mm<sup>2</sup>
-  CREE COB LED
-  SDCM<5
-  Ra≥80
-  3 or 5 Years Warranty




Electrophoresis + Painted available colour for housing:



### General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
10 Watt	1000 lm	2700K 3000K 4000K 6000K	10°, 15°, 24°, 36°, 60°	AC12V as standard (AC100-245V 50/60Hz optional)	Aluminium	Aluminium in coffee silver as standard or dark grey, Black, white

### Dimension

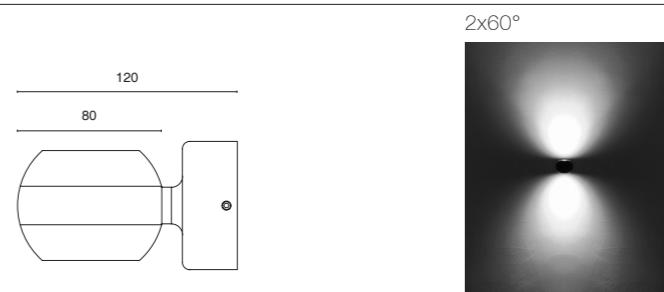

### Accessories

Mounting base



Included

