

Uranus 3
UR03


- IP65
- IK06
- Class III
- CE certification
- ETL certification
- Net Weight 0.32kgs
- PVC cable 0.3M 2*20#
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
3.5 Watt	350 lm	2700K 3000K 4000K 6000K	15°, 24°, 36°, 60°	AC12V as standard (DC12-24V optional)	Aluminium	Aluminium in dark grey or coffee silver, Black, white

Dimension

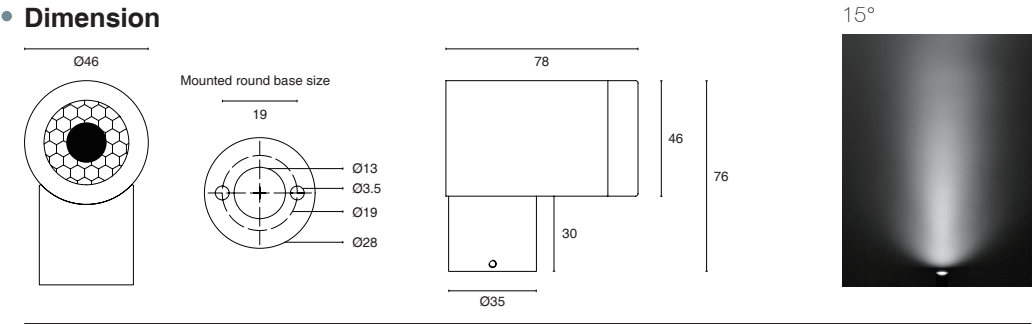

Accessories

Mounting base and screws



included



Uranus 7
UR07


- IP65
- IK06
- Class III
- CE certification
- ETL certification
- Net Weight 0.45kgs
- PVC cable 0.3M 2*20#
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
7 Watt	800 lm	2700K 3000K 4000K 6000K	15°, 24°, 36°, 60°	AC12V as standard (DC12-24V optional)	Aluminium	Aluminium in dark grey or coffee silver, Black, white

Dimension

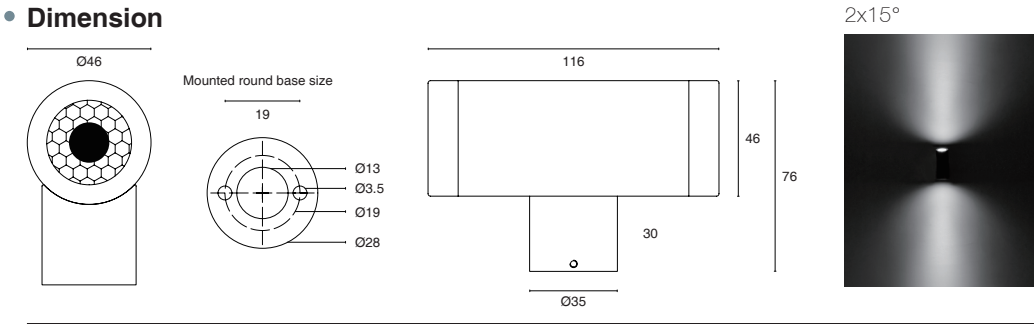


Accessories

Mounting base and screws



included



Uranus 9
UR09


- IP65
- IK06
- Class III
- CE certification
- ETL certification
- Net Weight 0.56kgs
- PVC cable 0.3M 2*20#
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
9 Watt	750 lm	2700K 3000K 4000K 6000K	10°, 23°, 36°	AC12V as standard (DC12-24V optional)	Aluminium	Aluminium in dark grey or coffee silver, Black, white

Dimension



Accessories

Mounting base and screws



included



Uranus 18
UR18



- IP65
- IK06
- Class III
- CE certification
- ETL certification
- Net Weight 1.04kgs
- PVC cable 0.3M 2*20#
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
18 Watt	1500 lm	2700K 3000K 4000K 6000K	10°, 23°, 36°	AC12V as standard (DC12-24V optional)	Aluminium	Aluminium in dark grey or coffee silver, Black, white

Dimension

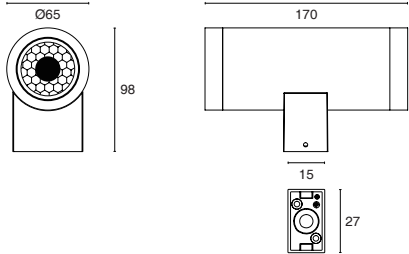

Accessories

Mounting base and screws



included