



NERTHUS

Libra Mini FA

LI03FA

- IP65
- IK04
- Class III
- CE certification
- ETL certification
- SALT SPRAY TESTED (over 1000 hours)
- Net Weight 0.3kgs
- Rubber cable 1M 2*0.824mm²
- OSRAM 2835 LED
- SDCM<5
- Ra≥80
- 5 Years Warranty




Electrophoresis + Painted available colour for housing:
 Matt black No.7648
 Dark grey No.7678
 Coffee red No.549899
 Matt white No.9003
 Antique brass

General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
3.5 Watt	80 lm	2700K 3000K 4000K 6000K	75°	AC12V as standard (DC12-24V optional)	Aluminium	Aluminium in coffee silver as standard or dark grey, Black, white

Dimension

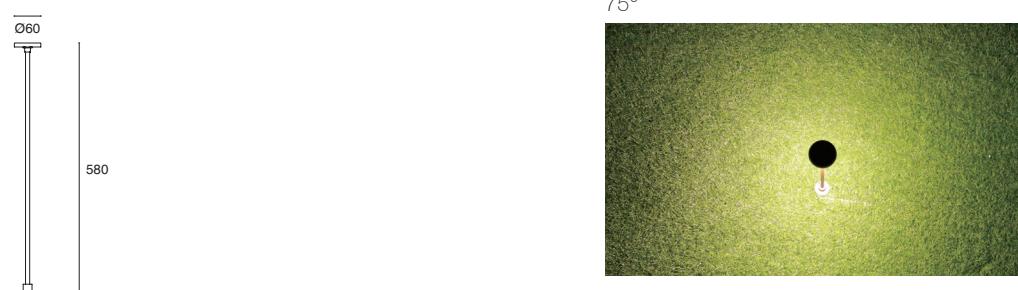

Accessories

Spike-205



Included





Libra Mini MA

LI03MA

- IP65
- IK04
- Class III
- CE certification
- ETL certification
- SALT SPRAY TESTED (over 1000 hours)
- Net Weight 0.53kgs
- Rubber cable 1M 2*0.824mm²
- OSRAM 2835 LED
- SDCM<5
- Ra≥80
- 5 Years Warranty





Electrophoresis + Painted available colour for housing:
Matt black No.7648 Dark grey No.7678 Coffee red No.549899 Matt white No.9003 Antique brass

General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
3.5 Watt	80 lm	2700K 3000K 4000K 6000K	75°	AC12V as standard (DC12-24V optional)	Aluminium	Aluminium in coffee silver as standard or dark grey, Black, white

Dimension

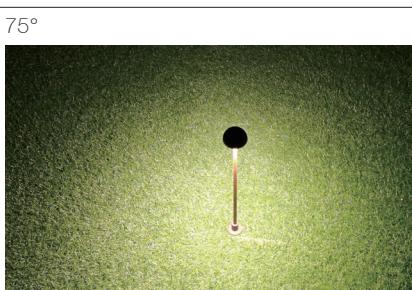

Accessories

Spike-205



Included

