



N NERTHUS

Libra LA

LILA09

- IP65
- IK04
- Class III
- CE certification
- ETL certification
- SALT SPRAY TESTED (over 1000 hours)
- Net Weight 1.2kgs with 516.5mm pole, spike base
- Rubber cable 1.5M 2*0.824mm²
- OSRAM 2835 LED
- SDCM<5
- Ra≥80
- 5 Years Warranty




Electrophoresis + Painted available colour for housing:



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
9 Watt	700 lm	2700K 3000K 4000K 6000K	100°	AC12V as standard (DC12-24V optional)	Aluminium	Aluminium in dark grey as standard or coffee silver, Black, white

Dimension

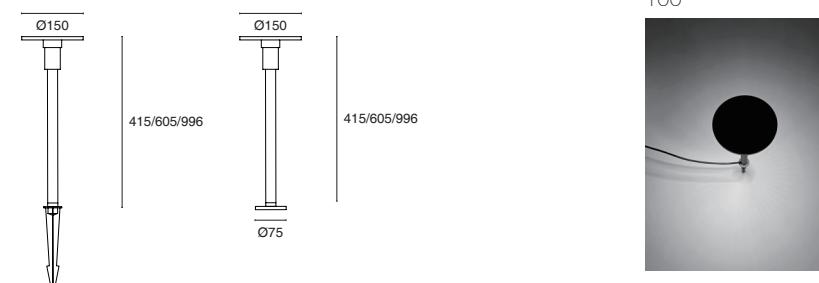

100°



Accessories



N NERTHUS

Libra LA (SOLAR)

LILAS02

- IP65
- IK04
- Class III
- CE certification
- SALT SPRAY TESTED (over 1000 hours)
- Net Weight 1.27kgs with 516.5mm pole, spike base
- No cables
- OSRAM 2835 LED
- SDCM<5
- Ra≥80
- 5 Years Warranty




Electrophoresis + Painted available colour for housing:




General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
2 Watt	70 lm	2700K 3000K 4000K 6000K	100°	With lithium battery 3.7V 3700mAh	Aluminium	Aluminium in dark grey as standard or coffee silver, Black, white


Dimension

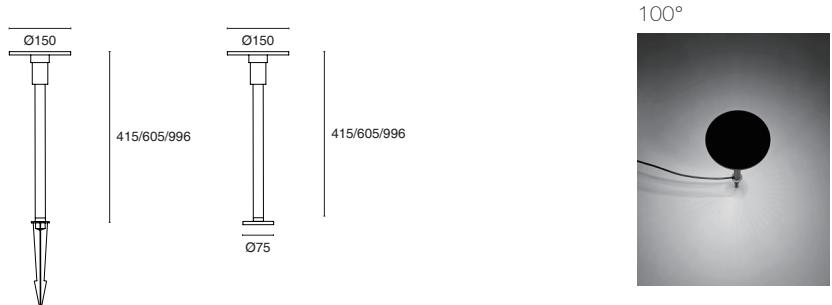



100°

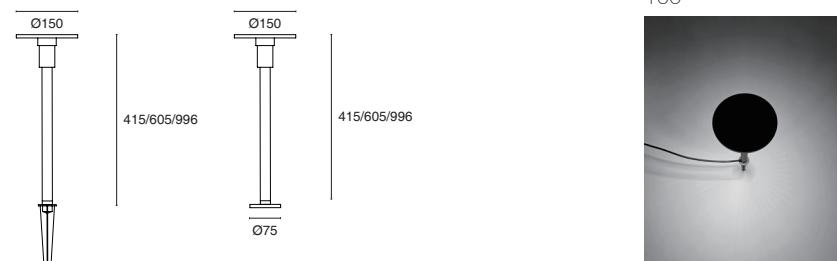

Accessories

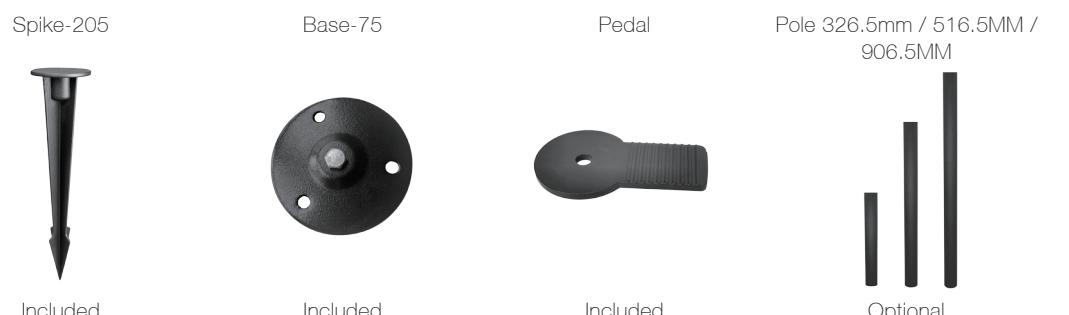





N NERTHUS

Libra Xspot

LIX12


- IP65
- IK04
- Class III
- CE certification
- ETL certification
- SALT SPRAY TESTED (over 1000 hours)
- Net Weight 2kgs with 906.5mm pole, spike base
- Rubber cable 2M 2*0.824mm²
- OSRAM 2835 LED +CREE COB LED
- SDCM<5
- Ra≥80
- 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
12 Watt	1000 lm	2700K 3000K 4000K 6000K	100° for disc and 15°, 24°, 36°, or 60° for the spot	AC12V as standard (DC12-24V optional)	Aluminium	Aluminium in dark grey as standard or coffee silver, Black, white

Dimension

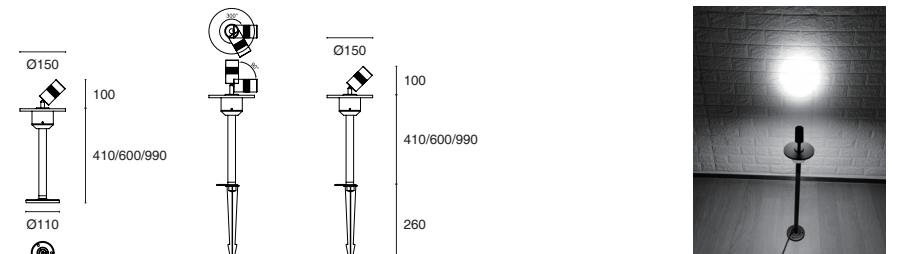

Accessories




Included



Included



Included



Optional

