

N NERTHUS

Mercury 1

ME01

- IP68
- IK06
- Class III
- CE certification
- Net Weight 0.465kgs
- Rubber cable 2M 2*0.824 mm²
- CREE XPE2 LED
- SDCM<5
- Ra≥80
- 5 Years Warranty




Use only in permanent immersion in water as to avoid damaging to LED!

• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
1.2 Watt	90 lm	2700K 3000K 4000K 6000K	15°, 25°, 38°, 45°, 60°, 100°	DC12V-DC24V	Stainless steel 316L	Stainless steel 316L

• Dimension

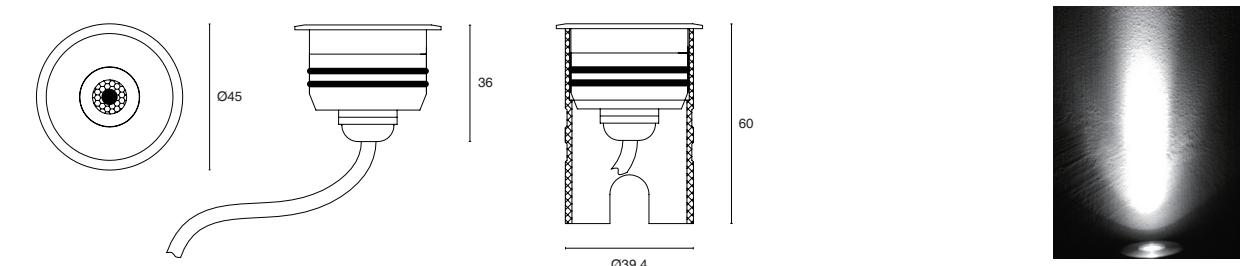

• Accessories

Mounting Sleeve



Included

N NERTHUS

Mercury 5

ME05

- IP68
- IK09
- Class III
- CE certification
- Net Weight 1kgs
- Rubber cable 2M 2*0.824 mm²
- CREE COB LED
- SDCM<5
- Ra≥80
- 5 Years Warranty




Use only in permanent immersion in water as to avoid damaging to LED!

• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
5 Watt	330 lm	2700K 3000K 4000K 6000K	25°, 40°	AC12V as standard (DC12V or DC24V optional)	Stainless steel 316L	Stainless steel 316L

• Dimension

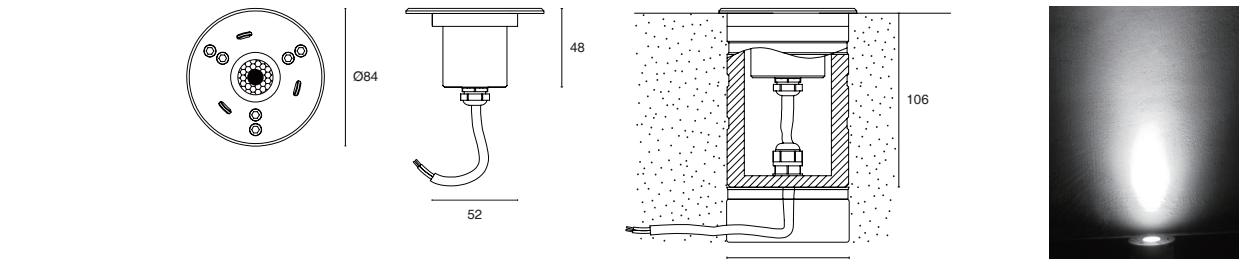


• Accessories

Mounting Box



Included



N NERTHUS

Mercury 7

ME07

- IP68
- IK09
- Class III
- CE certification
- Net Weight 1kgs
- Rubber cable 2M 2*0.824 mm²
- CREE COB LED
- SDCM<5
- Ra≥80
- 5 Years Warranty




Use only in permanent immersion in water as to avoid damaging to LED!
With temperature protection switch design. The lamp will be OFF when it's 65° inside, and back to be ON when it's cool down to be 45°.

• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
7 Watt	560 lm	2700K 3000K 4000K 6000K	25°, 40°	AC12V as standard (DC12V or DC24V optional)	Stainless steel 316L	Stainless steel 316L

• Dimension

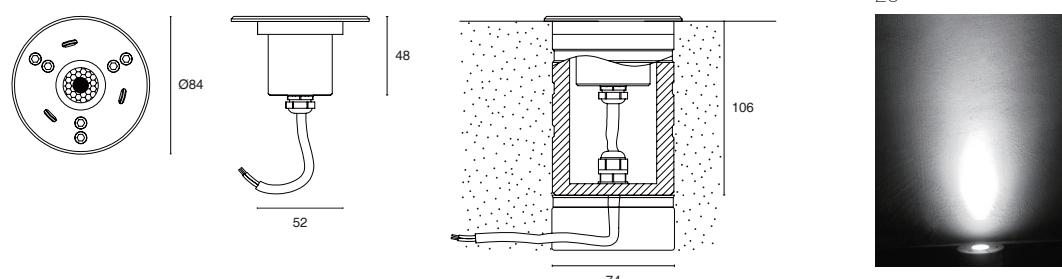

• Accessories

Mounting Box



Included

N NERTHUS

Mercury 9RGB

ME09RGB

- IP68
- IK09
- Class III
- CE certification
- Net Weight 1.1kgs
- Rubber cable 2M 4*0.5 mm²
- 5050 RGB 3in1 LED
- 5 Years Warranty




Use only in permanent immersion in water as to avoid damaging to LED!

• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
9 Watt	540 lm (All LEDs on)	RGB	25°, 40°	DC12V	Stainless steel 316L	Stainless steel 316L

• Dimension

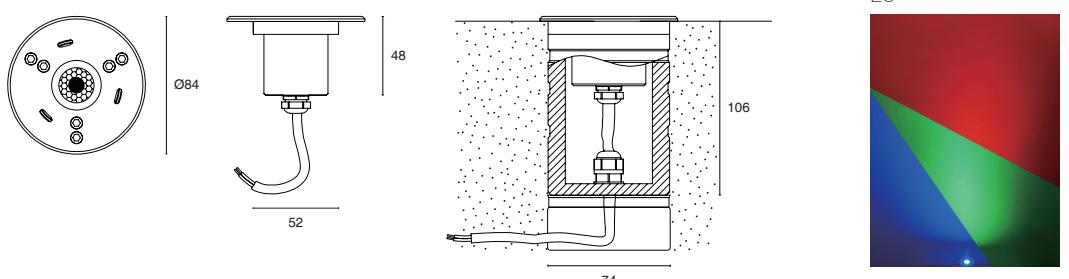


• Accessories

Mounting Box



Included



N NERTHUS

Mercury 12

ME12

- IP68
- IK09
- Class III
- CE certification
- Net Weight 2.35kgs
- Rubber cable 2M 2*0.824 mm²
- CREE XPG3 LED
- SDCM<5
- Ra≥80
- 5 Years Warranty




Use only in permanent immersion in water as to avoid damaging to LED!
With temperature protection switch design. The lamp will be OFF when it's 65° inside, and back to be ON when it's cool down to be 45°.

• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
12 Watt	900 lm	2700K 3000K 4000K 6000K	10°, 23°, 36°	AC12V as standard (DC12V or DC24V optional)	Stainless steel 316L	Stainless steel 316L

• Dimension

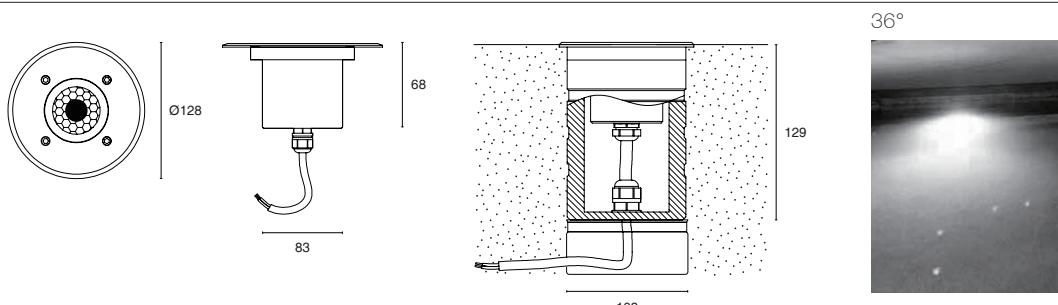

• Accessories

Mounting Box



Included

N NERTHUS

Mercury 18

ME18

- IP68
- IK09
- Class III
- CE certification
- Net Weight 2.35kgs
- Rubber cable 2M 2*0.824 mm²
- CREE XPG4 LED
- SDCM<5
- Ra≥80
- 5 Years Warranty




Use only in permanent immersion in water as to avoid damaging to LED!
With temperature protection switch design. The lamp will be OFF when it's 65° inside, and back to be ON when it's cool down to be 45°.

• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
18 Watt	1500 lm	2700K 3000K 4000K 6000K	10°, 23°, 36°	AC12V as standard (DC12V or DC24V optional)	Stainless steel 316L	Stainless steel 316L

• Dimension

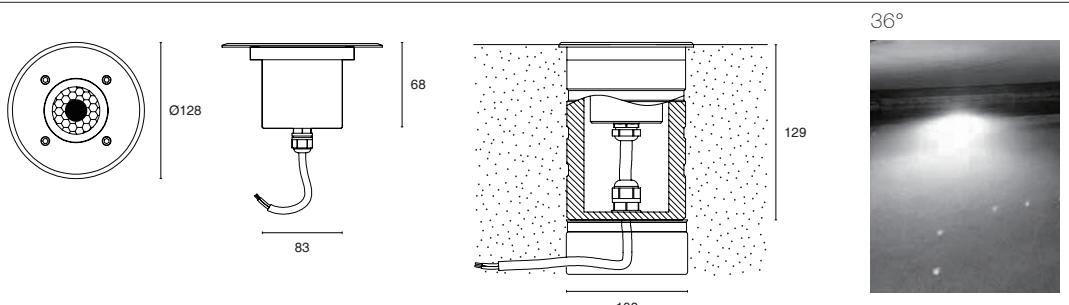


• Accessories

Mounting Box



Included



N NERTHUS

Mercury 18RGB

ME18RGB

- IP68
- IK09
- Class III
- CE certification
- Net Weight 2.4kgs
- Rubber cable 2M 4*0.75 mm²
- OSRAM RGB 3in1 LED
- SDCM<5
- Ra≥80
- 5 Years Warranty




Use only in permanent immersion in water as to avoid damaging to LED!

• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
18 Watt	800 lm (All LEDs on)	RGB	30°	DC12V	Stainless steel 316L	Stainless steel 316L

• Dimension

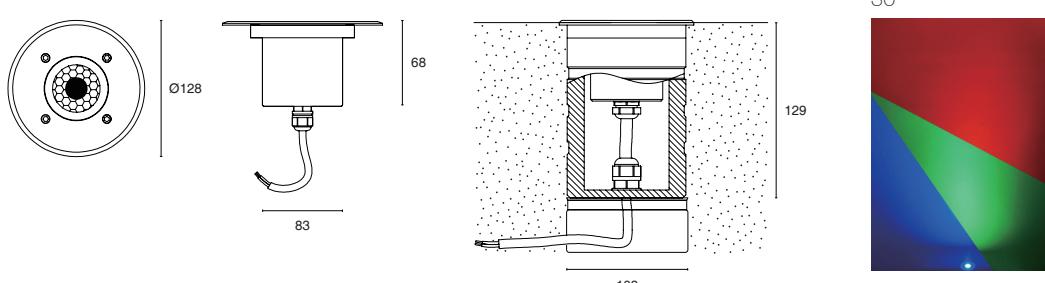

• Accessories

Mounting Box



Included

N NERTHUS

Mercury 18RGBW

ME18RGBW

- IP68
- IK09
- Class III
- CE certification
- Net Weight 2.4kgs
- Rubber cable 2M 5*0.5 mm²
- OSRAM RGBW 4in1 LED
- SDCM<5
- Ra≥80
- 5 Years Warranty




Use only in permanent immersion in water as to avoid damaging to LED!

• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
18 Watt	1080 lm (All LEDs on)	RGBW	30°	DC12V	Stainless steel 316L	Stainless steel 316L

• Dimension

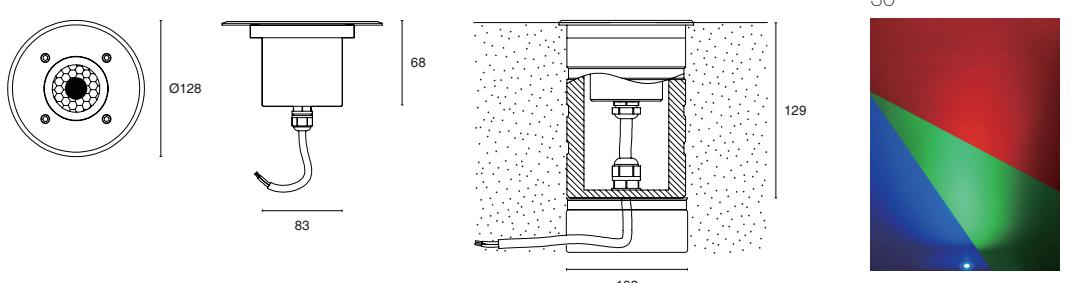

• Accessories

Mounting Box



Included