



Neptune 3
NE03

- IP68
- IK04
- Class III
- CE certification
- Net Weight 0.3kgs
- Rubber cable 1M 2*0.824 mm2
- CREE XPE2 LED
- SDCM<5
- Ra ≥ 80
- 5 Years Warranty




Use only in permanent immersion in water as to avoid damaging to LED!

• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
3 Watt	130 lm	2700K 3000K 4000K 6000K	10°, 15°, 30°, 45°, 60°	DC12V	Stainless steel 316L	Stainless steel 316L

• Dimension

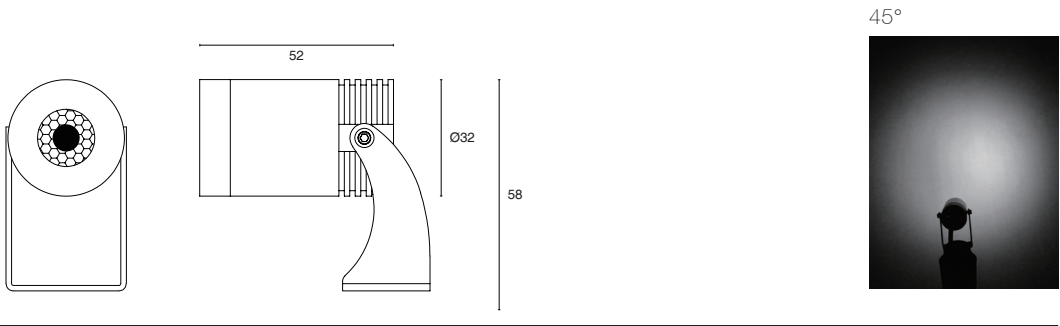

Neptune 3RGBW
NE03RGBW

- IP68
- IK04
- Class III
- CE certification
- Net Weight 0.35kgs
- Rubber cable 1M 5*0.5 mm2
- RGBW 3030 LED
- SDCM<5 for W
- Ra ≥ 80 for W
- 5 Years Warranty




Use only in permanent immersion in water as to avoid damaging to LED!

• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
3 Watt	30 lm all LEDs ON	RGBW/3000K RGBW/4000K RGBW/5500K	30° lens + Frosted glass	DC12V	Stainless steel 316L	Stainless steel 316L

• Dimension

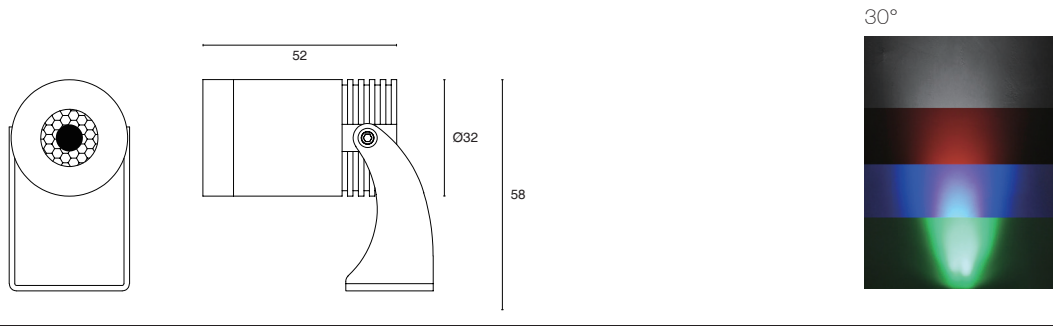



Neptune 8
NE08

- IP68
- IK04
- Class III
- CE certification
- Net Weight 0.7kgs
- Rubber cable 1M 2*0.824 mm2
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 5 Years Warranty




Use only in permanent immersion in water as to avoid damaging to LED!

• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
8 Watt	550 lm	2700K 3000K 4000K 6000K	15°, 24°, 36°, 60°	AC12V as standard (DC12V or DC24V optional)	Stainless steel 316L	Stainless steel 316L

• Dimension

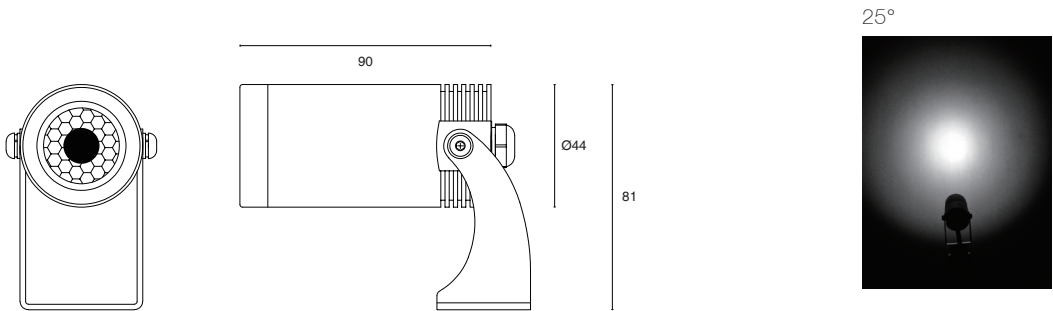

Neptune 8RGBW
NE08RGBW

- IP68
- IK04
- Class III
- CE certification
- Net Weight 0.75kgs
- Rubber cable 1M 5*0.5 mm2
- RGBW 3030 LED
- SDCM<5 for W
- Ra ≥ 80 for W
- 5 Years Warranty





Use only in permanent immersion in water as to avoid damaging to LED!

• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
8 Watt	240 lm all LEDs ON	RGBW/3000K RGBW/4000K RGBW/5500K	15°, 24°, 36°, 60°	DC12V	Stainless steel 316L	Stainless steel 316L

• Dimension

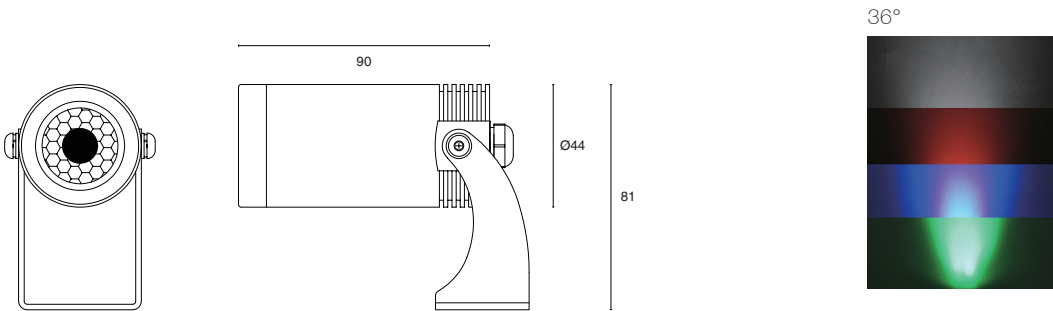



Neptune 15
NE15

- IP68
- IK04
- Class III
- CE certification
- Net Weight 1.1kgs
- Rubber cable 1M 2*0.824 mm2
- CREE COB LED
- SDCM<5
- Ra ≥ 80
- 5 Years Warranty




Use only in permanent immersion in water as to avoid damaging to LED!

General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
15 Watt	1050 lm	2700K 3000K 4000K 6000K	10°, 23°, 36°	AC12V as standard (DC12V or DC24V optional)	Stainless steel 316L	Stainless steel 316L

Dimension

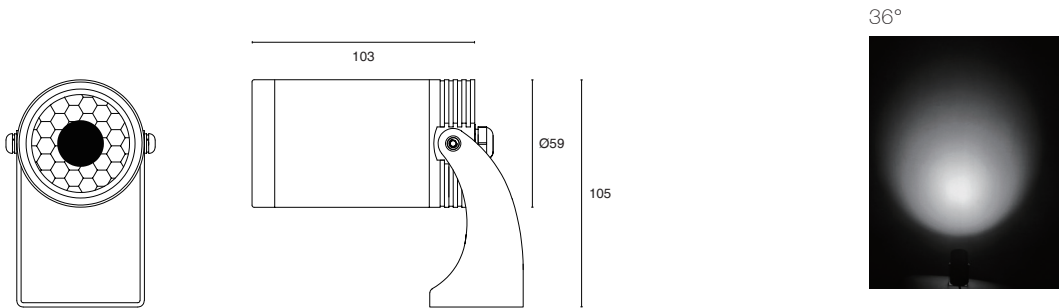

Neptune 15RGBW
NE15RGBW

- IP68
- IK04
- Class III
- CE certification
- Net Weight 1.15kgs
- Rubber cable 1M 5*0.5 mm2
- RGBW 3030 LED
- SDCM<5 for W
- Ra ≥ 80 for W
- 5 Years Warranty



Use only in permanent immersion in water as to avoid damaging to LED!

General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
15 Watt	450 lm all LEDs ON	RGBW/3000K RGBW/4000K RGBW/5500K	10°, 23°, 36°	DC12V	Stainless steel 316L	Stainless steel 316L

Dimension

