

N NERTHUS

Vega 36-1000

VG361000


- IP65
- IK04
- Class III
- CE certification
- Net Weight 1.75kgs
- 2 PCS rubber cables with waterproof connectors, one side male, another side female
- OSRAM 3in1 LED
- SDCM<5
- Ra≥80
- 5 Years Warranty



• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
36 Watt	2700 lm	2700K 3000K 4000K 6000K	12° / 24° / 30° / 40° / 60° / Oval lens 15°*40°	DC24V (AC100- 245V as options)	Aluminium + Tempered glass	Aluminium in dark grey

• Dimension

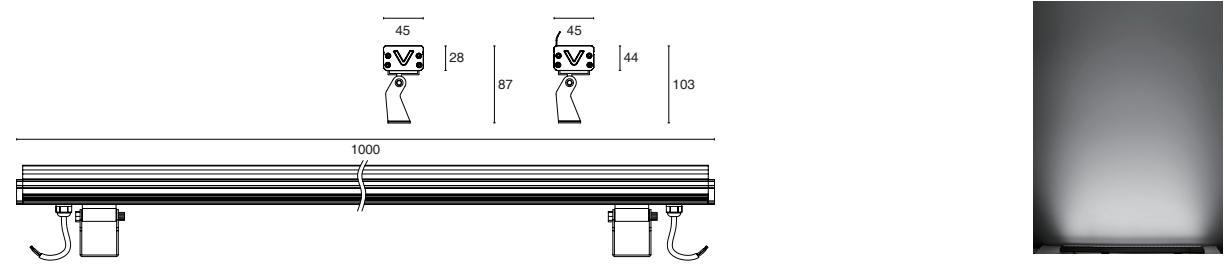

• Accessories

Loop in Loop out cables with male / female connectors



Included

N NERTHUS

Vega 48-1000

VG481000


- IP65
- IK04
- Class III
- CE certification
- Net Weight 1.75kgs
- 2 PCS rubber cables with waterproof connectors, one side male, another side female
- OSRAM 3030 LED
- SDCM<5
- Ra≥80
- 5 Years Warranty



• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
48 Watt	3200 lm	2700K 3000K 4000K 6000K	12° / 24° / 30° / 40° / 60° / Oval lens 15°*40°	DC24V (AC100- 245V as options)	Aluminium + Tempered glass	Aluminium in dark grey

• Dimension

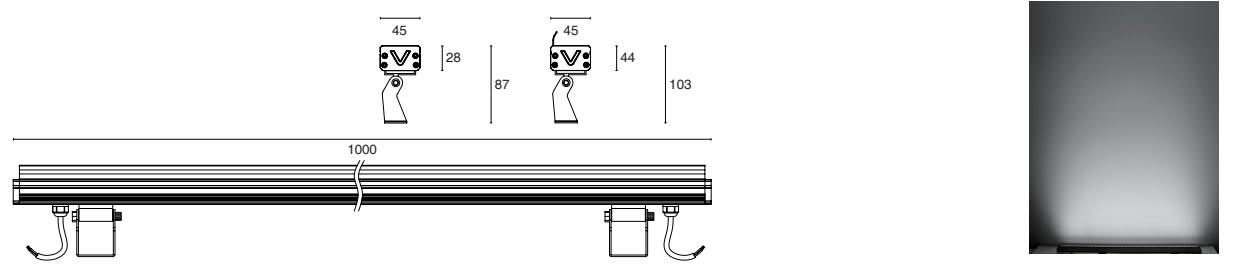


• Accessories

Loop in Loop out cables with male / female connectors



Included



N NERTHUS

Vega 18-500

VG18500


- IP65
- IK04
- Class III
- CE certification
- Net Weight 1kgs
- 2 PCS rubber cables with waterproof connectors, one side male, another side female
- OSRAM 3030 LED
- SDCM<5
- Ra≥80
- 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
18 Watt	1300 lm	2700K 3000K 4000K 6000K	12° / 24° / 30° / 40° / 60° / Oval lens 15°40°	DC24V (AC100- 245V as options)	Aluminium + Tempered glass	Aluminium in dark grey

Dimension

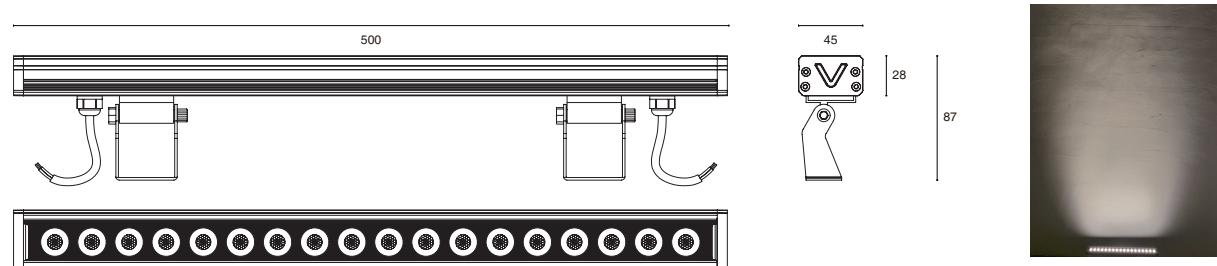

Accessories

Loop in Loop out cables with male / female connectors



Included

N NERTHUS

Vega 24-500RGBW-DMX

VG24500RGBW


- IP65
- IK04
- Class III
- CE certification
- Net Weight 1.3kgs
- 2 PCS rubber cables with waterproof connectors, one side male, another side female
- 3030 RGBW 4in1 LED
- SDCM<5 for W
- Ra≥80 for W
- 5 Years Warranty



General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
24 Watt	1300 lm when all LEDs ON	RGBW3000K	12° / 24° / 30° / 40° / 60° / Oval lens 15°40°	DC24V	Aluminium + Tempered glass	Aluminium in dark grey

Dimension

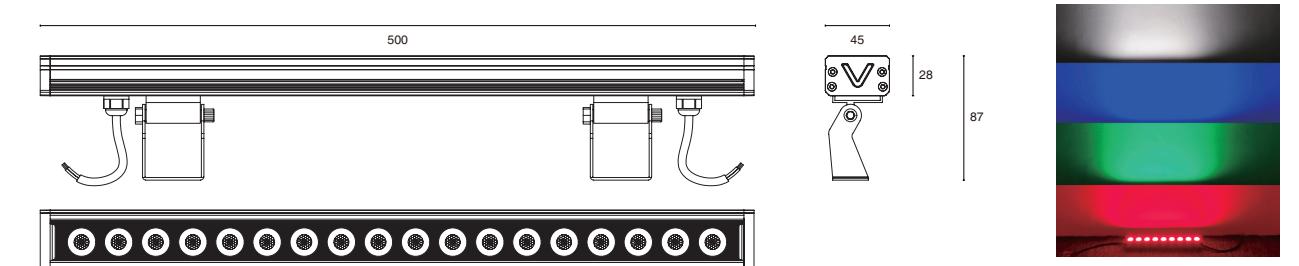

Accessories

Loop in Loop out cables with male / female connectors



Included



N NERTHUS

Vega 48-1000RGBW-DMX

Vega 48-1000RGBW-DMX


- IP65
- IK04
- Class III
- CE certification
- Net Weight 2.3kgs
- 2 PCS rubber cables with waterproof connectors, one side male, another side female
- 3030 RGBW 4in1 LED
- SDCM<5 for W
- Ra≥80 for W
- 5 Years Warranty



• General Data

Power	Lumen	CCT	Beam angle	Input voltage	Cover	Housing
48 Watt	2500 lm when all LEDs ON	RGBW3000K	12° / 24° / 30° / 40° / 60° / Oval lens 15°*40°	DC24V	Aluminium + Tempered glass	Aluminium in dark grey

• Dimension

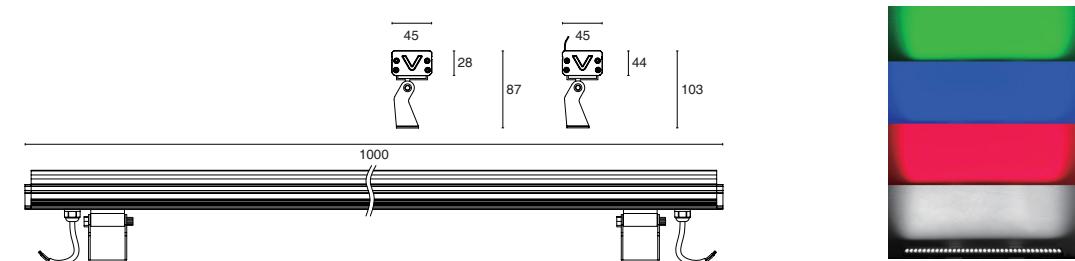

• Accessories

Loop in Loop out cables with male / female connectors



Included

