



Illumination Exterior LED Lighting


2026

 NERTHUS





Crafting Timeless Lighting Art for North America's Premium Spaces

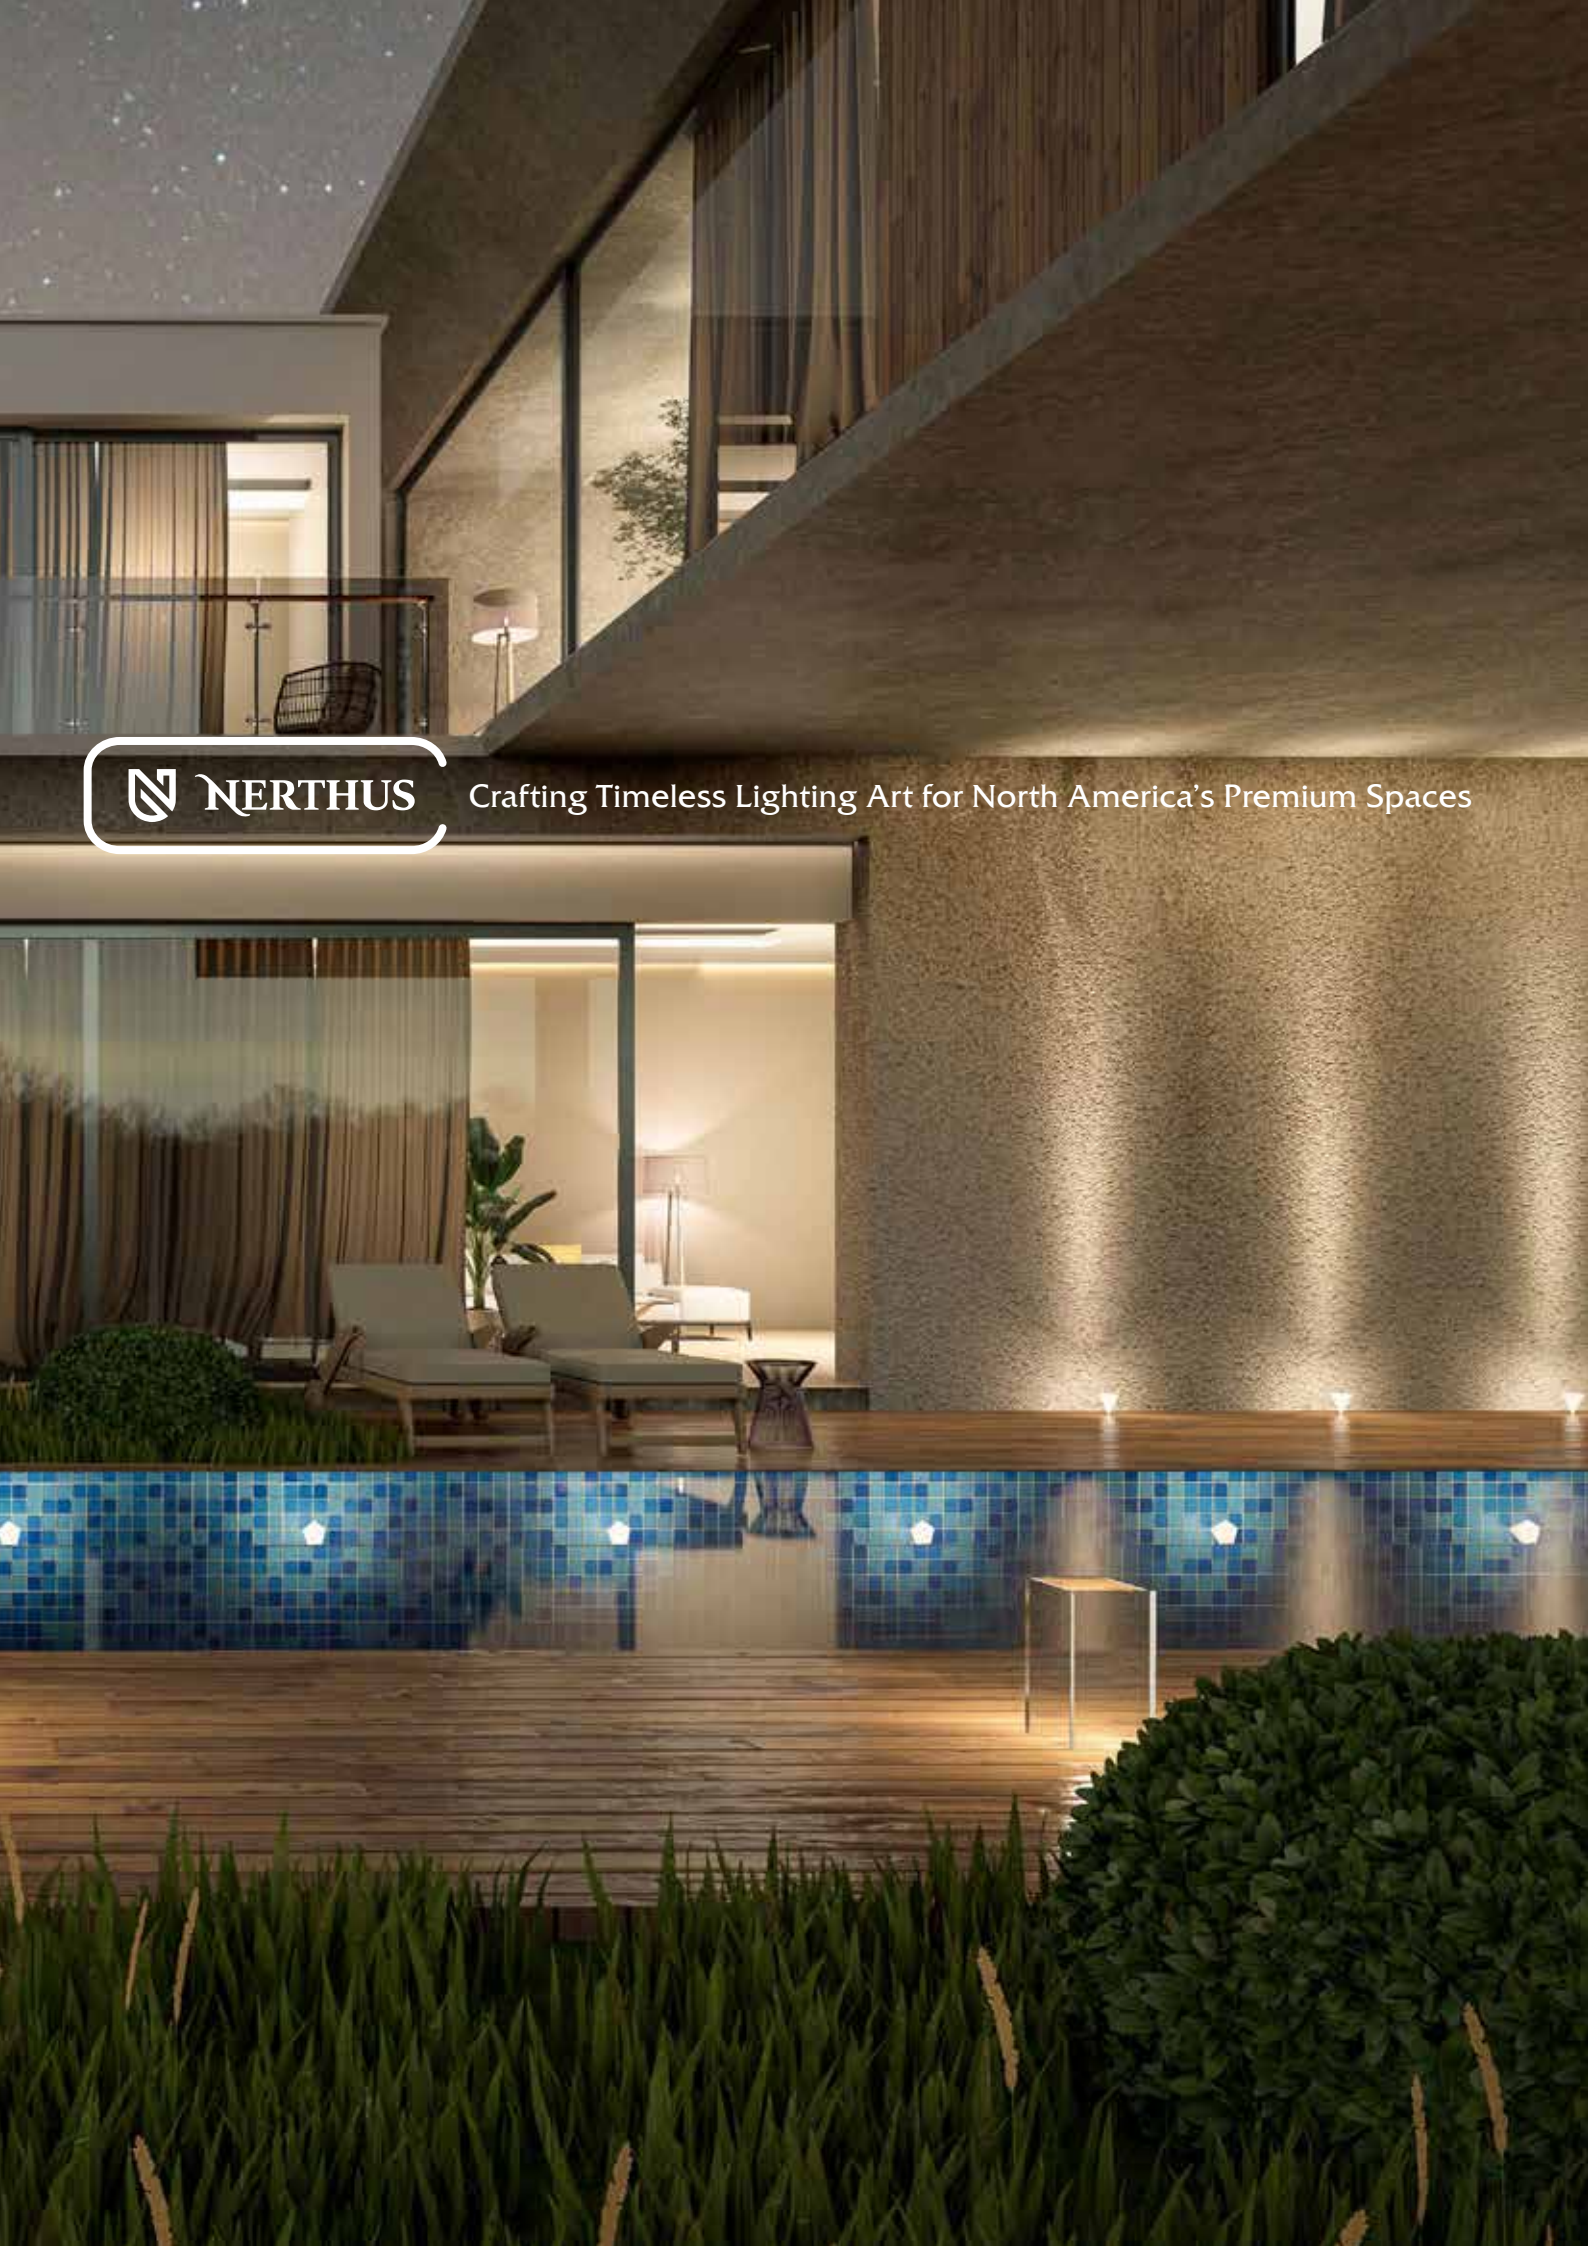





BRAND VISION AND MISSION


Nerthus aspires to be the benchmark for premium outdoor lighting in North America, illuMinating courtyards and commercial spaces with innovative design and elegant light artistry, endowing spaces with eternal vitality and beauty. We are committed to collaborating with the world's top creative talents, pushing the boundaries of design and technology to exceed our clients' expectations of quality and aesthetics, and leading the future of the outdoor lighting industry. Our mission is to deliver an extraordinary lighting experience through unparalleled design, exquisite craftsmanship, and enduring reliability. Nerthus offers more than just high-end lighting products; it conveys a philosophy of life where elegance and quality coexist, allowing light to become a bridge connecting nature and humanity.

PRODUCTS AND QUALITY COMMITMENT

Nerthus specializes in providing exceptional outdoor lighting solutions for discerning homeowners, landscape designers, and commercial developers. Our product range includes inground lights, underwater lights, spotlights, wall lights, and stair lights, each a masterpiece of art and technology, crafted with cutting-edge techniques and rigorous quality control. All Nerthus products are ETL-certified, meeting the highest safety and performance Standards in North America. We understand that true quality is not only about immediate excellence but also about enduring the test of time. Therefore, Nerthus places unwavering trust and commitment in every creation, ensuring they remain timeless in both form and function.





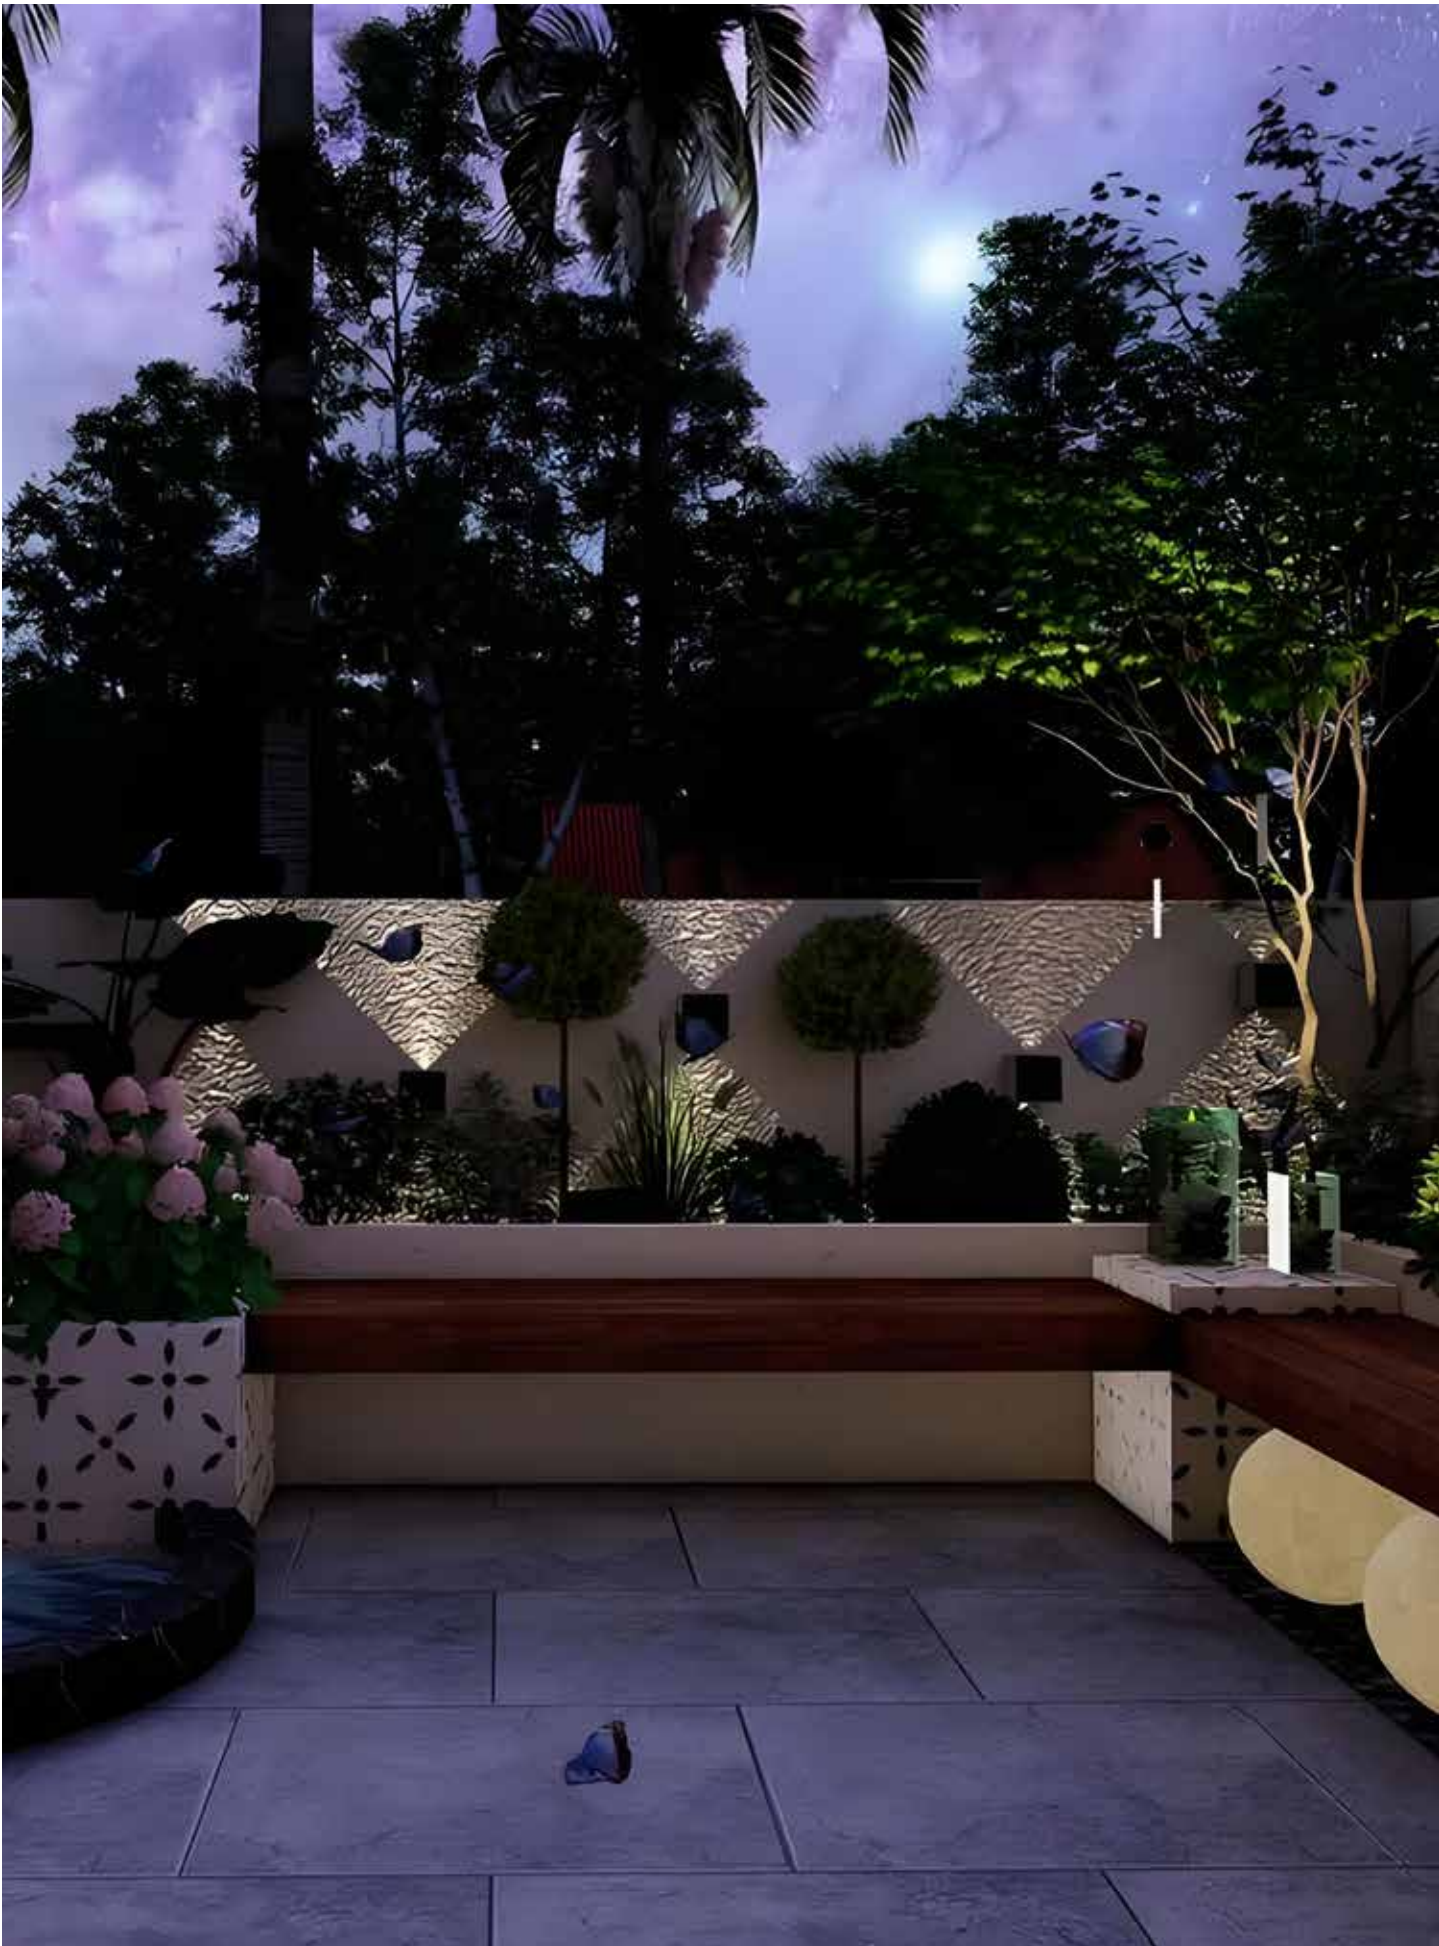



BRAND ORIGIN AND DESIGN PHILOSOPHY

Nerthus, inspired by the Norse goddess of the earth, symbolizes the harmonious union of nature and beauty. Rooted in Canada, the brand draws from the rich heritage of European design, seamlessly blending classical aesthetics with modern innovation. Nerthus was born from a collective of creative visionaries deeply passionate about the art of light, dedicated to infusing every piece with the elegance of European style, bringing an unparalleled refined experience to North America's high-end outdoor lighting market.










CONTENTS

01	INGROUND LIGHTS SERIES	014
02	SURFACE MOUNTING ONGROUND LIGHTS SERIES	014
03	GARDEN SPOT LIGHTS SERIES	014
04	LED LAWN LIGHTS SERIES	014
05	WALL LIGHTS SERIES	014
06	MOON SERIES	014
07	UNDERWATER LIGHTS SERIES	014
08	LED WALL WASHER LIGHT SERIES	014
09	DRIVERS AND CONNECTORS	014

INGROUND LIGHTS SERIES

						
SATURN SA03 18	SATURN RGBW SA03RGBW 19	STAR WITH INTERCHANGEABLE COVER 20	VESTA 1 VT01 24	VESTA 1S VT01S 25	VESTA 3 VT03 26	VESTA 6 VT06 27
						
VESTA 9 VT09 30	VESTA 12 VT12 31	VESTA 15 VT15 32				

SURFACE MOUNTING ONGROUND LIGHTS SERIES

						
STAR ST01 38	STAR RGB ST01RGB 39	STAR WITH INTERCHANGEABLE COVER 40	VENUS VE03 44	VENUS RGB VE03RGB 45	VENUS RGBW VE03RGBW 46	VENUS WITH INTERCHANGEABLE COVER 48


LED LAWN LIGHTS SERIES

						
MARS 3 MA03 54	MARS 6 MA06 55	MARS 15 MA15 58	MARS 25 MA25 59	CERES ZOOM 4 CZ04 62	CERES ZOOM 8 CZ08 63	CERES ZOOM 12 CZ12 66
						
CERES ZOOM 18 CZ18 67	CERES ZOOM 25 CZ25 70	MARS MR16 MAMR16 72	MARS MR16-UP MAMR16U 73			


LED LAWN LIGHTS SERIES

						
LIBRA MINI FA LI03FA 80	LIBRA MINI MA LI03MA 82	LIBRA LA LILA09 84	LIBRA LA (SOLAR) LILAS02 85	LIBRA XSPOT LIX12 88	PISCES 1ASYM 300 / PISCES 1ASYM 600 300MM VERSION: PS121300 / 600mm VERSION: PS121600 90	PISCES 2ASYM 300 / PISCES 2ASYM 600 300MM VERSION: PS122300 / 600mm VERSION: PS122600 91


WALL LIGHTS SERIES

						
JUPITER 4A JU04A 96	JUPITER 3B JU03B 97	JUPITER 8A JU08A 100	JUPITER 5B JU05B 101	PLUTO 3A PL03A 104	PLUTO 3AS PL03A SQUARE 105	PLUTO 3BS PL03BS 108
						
PLUTO 2S PL02S 109	URANUS 3 UR03 112	URANUS 7 UR07 113	URANUS 9 UR09 114	URANUS 18 UR18 115		


MOON SERIES




MOON 5C | MN05C
120




MOON 8C | MN08C
121




MOON 3P | MN03 POLE
124




MOON 3SU | MN03 SUSPENDED
126



MOON 8P | MN08 POLE
128



MOON 8SU | MN08 SUSPENDED
129




MOON ZOOM8PF | MN08 ZOOM POLE
130




MOON ZOOM8SUF | MN08 ZOOM SUSPENDED
132



MOON 3B | MN03 BRACKET
134



MOON 8B | MN08 BRACKET
136



MOON 15B | MN15 BRACKET
138



POLE WITH BRACKETS FOR TWO SPOT LIGHTS
139



MOON 3U | MN03 UNDERWATER
142



MOON 8U | MN08 UNDERWATER
143



MOON 6W | MN06W
146



MOON 6WD | MN06WD
147



MOON 10W | MN10W
148



MOON 10WD | MN10WD
149



MOON ZOOM8DL | MN08 ZOOM CEILING
152

UNDERWATER LIGHTS SERIES



MERCURY 1 | ME01
158



MERCURY 5 | ME05
159



MERCURY 7 | ME07
162



MERCURY 9RGB | ME09RGB
163



MERCURY 12 | ME12
166



MERCURY 18 | ME18
167



MERCURY 18RGB | ME18RGB
170



MERCURY 18RGBW | ME18RGBW
171



NEPTUNE 3 | NE03
174



NEPTUNE 3RGBW | NE03RGBW
175



NEPTUNE 8 | NE08
178



NEPTUNE 8RGBW | NE08RGBW
179




NEPTUNE 15 | NE15
182




NEPTUNE 15RGBW | NE15RGBW
183


LED WALL WASHER LIGHT SERIES




CARINA 48-500 | CA48500
188



CARINA 96-1000 | CA961000
189



CARINA 18-500RGBW | CA18500RGBW
192



CARINA 36-1000RGBW | CA361000RGBW
193



VEGA 36-1000 | VG361000
196



VEGA 48-1000 | VG481000
197



VEGA 18-500 | VG18500
200



VEGA 24-500RGBW-DMX | VG24500RGBW
201



VEGA 48-1000RGBW-DMX | VEGA 48-1000RGBW-DMX
202

DRIVERS AND CONNECTORS



DRIVER 150W | K23-TF150
208



DRIVER 300W | K23-TF300
209



TIMMER, PHOTOCONTROL
210



IP68 | TUBE GEL CONNECTOR | WRC-D4-PY
211

INGROUND LIGHTS SERIES

Products Features

These products are designed with Stainless Steel 316 trim, Solid 6063 Aluminum housing CNC machined, with passivated (anodizing) anti-corrosion finishing for housing, optics PMMA Lens with wonderful light output, Tempered Glass for high loading capacity, silicone gasket and special flat Cable gland

for waterproof IP67 and high quality CREE LED, OSRAM LED.

We make wide range of inground lights to meet different application with different size, power, color, Beam Angle.

These products are with CE, ETL Certifications

Application

These lights are widely used in the exterior or interior application, such as lighting columns, walls, architectural features, landscape features for the hotel, the garden, the park, the square, the stair step, the landscape road etc.



SSS 316 IP67 CE ETL Intertek



SATURN

SA03


-  IP67
-  IK10
-  Class III
-  CE Certification
-  ETL Certification
-  820 kgs Max. Static Load
-  Net Weight 0.35 kgs
-  Rubber Cable 1M 2x0.824mm²
-  CREE XPE2 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years / Cover 15 Years Warranty



• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
3 Watt	130 lm	2700K 3000K 4000K 6000K	6°, 11°, 17°, 23°, 28°, 43°, 58°	AC12V (DC12-DC24V Optional)	9 Kinds of Covers Optional	Dark Grey Aluminium

• Dimension

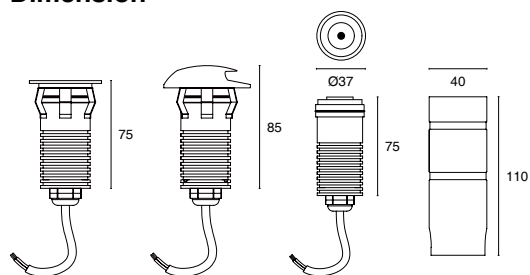

43°



• Accessories

Mounting Tube



Included

Clip



Optional

SATURN RGBW

SA03RGBW


-  IP67
-  IK10
-  Class III
-  CE Certification
-  820 kgs Max. Static Load
-  Net Weight 0.4 kgs
-  Rubber Cable 1M 5x0.5mm²
-  Prolight 3030RGBW 4in1 LED
-  SDCM<5 for W
-  Ra ≥ 80 for W
-  5 Years / Cover 15 Years Warranty



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
3 Watt	90 lm	RGBW3000K RGBW4000K RGBW5500K	6°, 11°, 17°, 23°, 28°, 43°, 58°	DC12V	9 Kinds of Covers Optional	Dark Grey Aluminium

Dimension

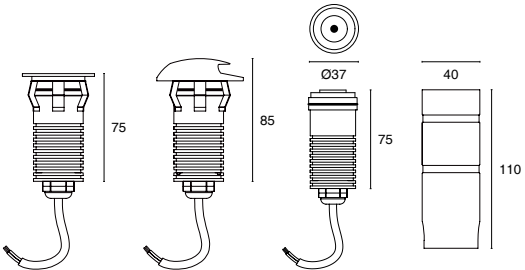

43°



Accessories

Mounting Tube



Included

Clip



Optional

SATURN OPAL


SA03 OPAL

Stainless Steel 316L Cover for SA03, SA03RGBW

 Net Weight 0.038 kgs



100° with opal diffuser



SATURN FLAT


SA03F

Stainless Steel 316L Cover for SA03, SA03RGBW

 Net Weight 0.035 kgs



43°



SATURN FLAT-S


SA03FS

Stainless Steel 316L Cover for SA03, SA03RGBW

 Net Weight 0.038 kgs



43°




SATURN 180D


SA03180

Stainless Steel 316L Cover for SA03, SA03RGBW

 Net Weight 0.14 kgs



1x180°



SATURN 1WAY


SA03W1

Stainless Steel 316L Cover for SA03, SA03RGBW

 Net Weight 0.16 kgs



1x100°



SATURN 2WAY


SA03W2

Stainless Steel 316L Cover for SA03, SA03RGBW

 Net Weight 0.12 kgs



2x100°



SATURN 3AWAY


SA03W3A

Stainless Steel 316L Cover for SA03, SA03RGBW

 Net Weight 0.12 kgs



3x100°



SATURN 3BWAY


SA03W3B

Stainless Steel 316L Cover for SA03, SA03RGBW

 Net Weight 0.14 kgs



3x80°



SATURN 4WAY


SA03W4

Stainless Steel 316L Cover for SA03, SA03RGBW

 Net Weight 0.10kgs



4x80°









VESTA 1

VT01


-  IP67
-  IK06
-  Class III
-  CE Certification
-  100 kgs Max. Static Load
-  Net Weight 0.072 kgs
-  Rubber Cable 0.6M 2x0.75mm²
-  OSRAM 3030 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years / Cover 15 Years Warranty




• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
1.4 Watt	80 lm	2700K 3000K 4000K 6000K	15°, 25°, 30°, 45°, 60°, 120°	DC12-DC24V	SS316L	Dark Grey Aluminium

• Dimension

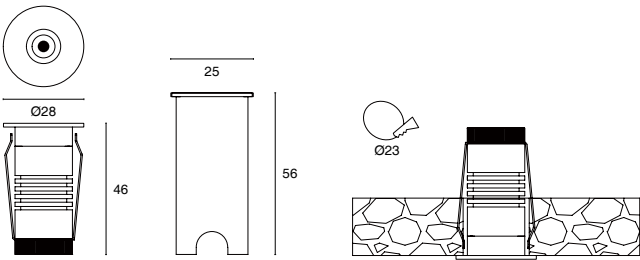

45°



• Accessories

Mounting Tube



Included

VESTA 1S

VT01S


-  IP67
-  IK06
-  Class III
-  CE Certification
-  100 kgs Max. Static Load
-  Net Weight 0.08 kgs
-  Rubber Cable 0.6M 2x0.75mm²
-  OSRAM 3030 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years / Cover 15 Years Warranty




• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
1.4 Watt	80 lm	2700K 3000K 4000K 6000K	15°, 25°, 30°, 45°, 60°, 120°	DC12-DC24V	SS316L	Dark Grey Aluminium

• Dimension

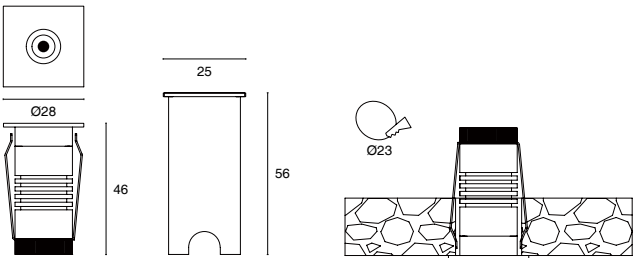

45°



• Accessories

Mounting Tube



Included

VESTA 3

VT03


-  IP67
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  750 kgs Max. Static Load
-  Net Weight 0.3 kgs
-  Rubber Cable 1M 2x0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years / Cover 15 Years Warranty




• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
3 Watt	285 lm	2700K 3000K 4000K 5700K	15°, 24°, 36°, 50°	AC12V (DC12-DC24V Optional)	SS316L Mirror Polishing	Dark Grey Aluminium

• Dimension



36°



• Accessories

Mounting Tube



Included

Honeycomb



Optional

VESTA 6

VT06


-  IP67
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  750 kgs Max. Static Load
-  Net Weight 0.55 kgs
-  Rubber Cable 1M 2x0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years / Cover 15 Years Warranty




• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
6 Watt	480 lm	2700K 3000K 4000K 5700K	15°, 24°, 36°, 50°	AC12V (DC12-DC24V Optional)	SS316L Mirror Polishing	Dark Grey Aluminium

• Dimension



36°



• Accessories

Mounting Tube



Included

Honeycomb



Optional





VESTA 9

VT09


-  IP67
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  750 kgs Max. Static Load
-  Net Weight 0.6 kgs
-  Rubber Cable 1M 2x0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years / Cover 15 Years Warranty




• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
9 Watt	650 lm	2700K 3000K 4000K 5700K	15°, 24°, 36°, 50°	AC12V (DC12-DC24V Optional)	SS316L Mirror Polishing	Dark Grey Aluminium

• Dimension



36°



• Accessories

Mounting Tube



Included

Honeycomb



Optional

VESTA 12

VT12


-  IP67
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  750 kgs Max. Static Load
-  Net Weight 0.75 kgs
-  Rubber Cable 1M 2x0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years / Cover 15 Years Warranty




General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
12 Watt	920 lm	2700K 3000K 4000K 5700K	15°, 24°, 36°, 50°	AC12V (DC12-DC24V Optional)	SS316L Mirror Polishing	Dark Grey Aluminium

Dimension



36°



Accessories

Mounting Tube



Included

Honeycomb



Optional

VESTA 15

VT15



-  IP67
-  IK07
-  Class III
-  CE Certification
-  ETL Certification
-  750 kgs Max. Static Load
-  Net Weight 0.75 kgs
-  Rubber Cable 1M 2x0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years / Cover 15 Years Warranty




• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
15 Watt	1100 lm	2700K 3000K 4000K 5700K	15°, 24°, 36°, 50°	AC12V (DC12V-DC24V Optional)	SS316L Mirror Polishing	Dark Grey Aluminium

• Dimension



36°



• Accessories

Mounting Tube



Included

Honeycomb



Optional








SURFACE MOUNTING ONGROUND LIGHTS SERIES

Products Features

These products are designed with Stainless Steel 316 trim, Solid 6063 AluMinum housing CNC machined, with passivated (anodizing) anti-corrosion finishing for housing, Tempered Glass or PC for high loading capacity, silicone gasket and glue for waterproof IP67 and high quality OSRAM LED LED. These products are with CE, ETL certifications.


Application

These lights are widely used in the exterior or interior application, such as lighting road, architectural features, landscape features for the hotel, the garden, the park, the square, the stair step, the landscape road etc.

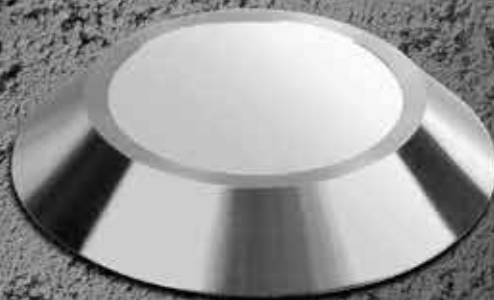

SSS 316 IP67 



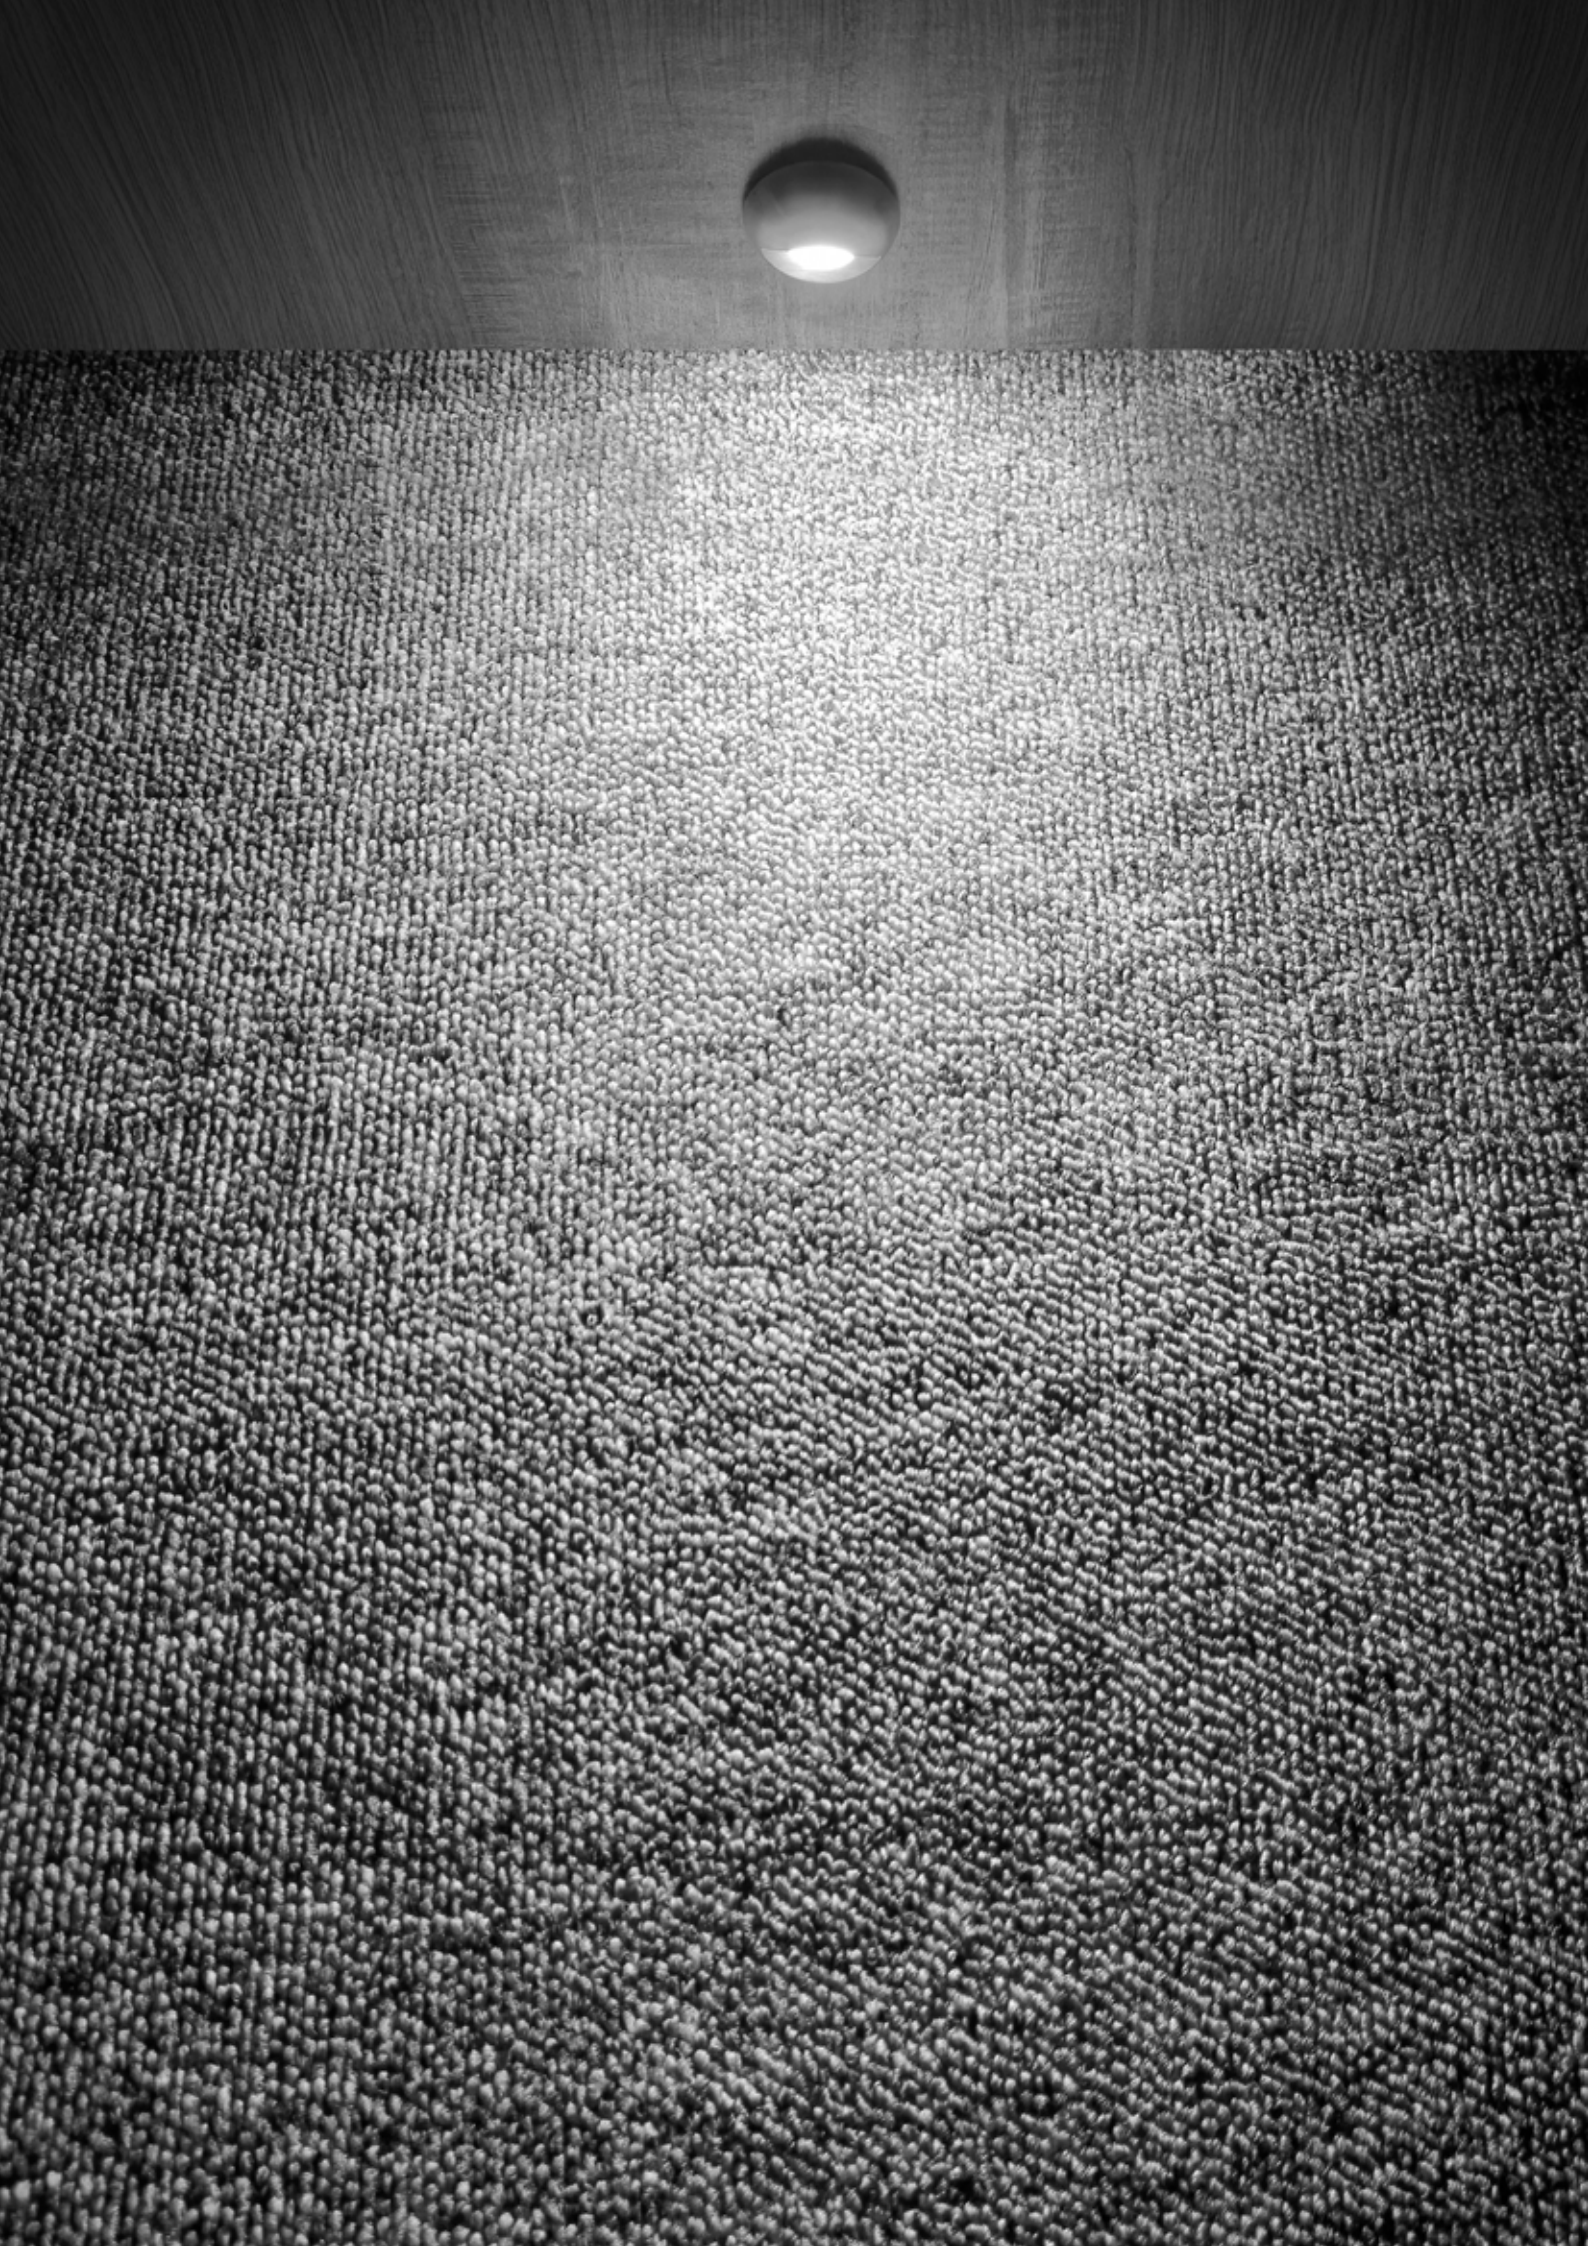

STAR

ST01


-  IP67
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  750 kgs Max. Static Load
-  Net Weight 0.073 kgs
-  PVC 0.3M 2*0.34 mm²
-  OSRAM 3030 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years / Cover 15 Years Warranty



• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
1.2 Watt	85 lm	2700K 3000K 4000K 6000K	100°	DC12V or AC12V	10 Kinds of Covers Optional	Silver Grey Aluminium

• Dimension

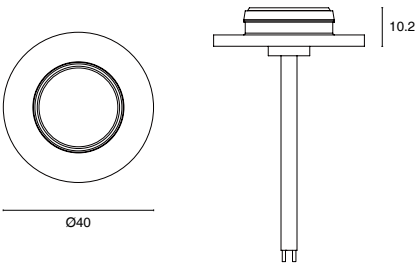

100°



• Accessories

Screws



Included

STAR RGB

ST01RGB


-  IP67
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  750 kgs Max. Static Load
-  Net Weight 0.12 kgs
-  PVC 0.3M 4*22#
-  Prolight 3030RGB 3in1 LED
-  5 Years / Cover 15 Years Warranty




• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
2 Watt	60 lm All LEDs on	RGB	100°	DC12V	10 Kinds of Covers Optional	Silver Grey Aluminium

• Dimension

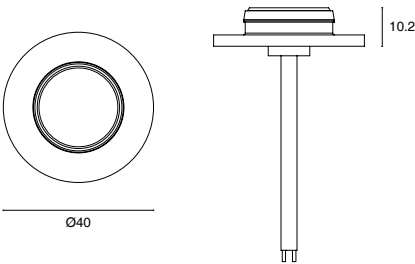

100°

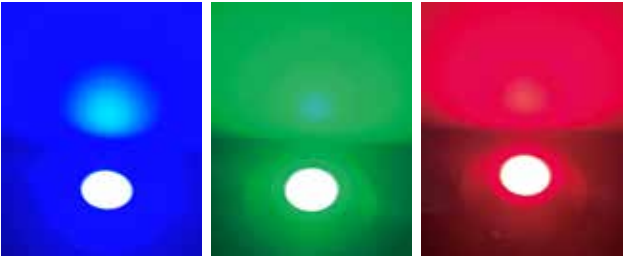

• Accessories

Screws





Included

STAR EYELID

ST01E

Stainless Steel 316L Cover for ST01, ST01RGB

 Net Weight 0.078 kgs




STAR EYELID ALU

ST01EA

Aluminium Cover for ST01, ST01RGB, painting in black or White

 Net Weight 0.024 kgs





STAR STEP

ST01S

Stainless Steel 316L Cover for ST01, ST01RGB

 Net Weight 0.099 kgs




STAR CONE

ST01C

Stainless Steel 316L Cover for ST01, ST01RGB

 Net Weight 0.096 kgs





STAR DOME

ST01D

Stainless Steel 316L Cover for ST01, ST01RGB

 Net Weight 0.056 kgs




STAR DOME ALU

ST01DA

Aluminium Cover for ST01, ST01RGB, painting in black or White

 Net Weight 0.017 kgs





STAR FLUSH

ST01FL

Stainless Steel 316L Cover for ST01, ST01RGB

 Net Weight 0.059 kgs





STAR FLUSH ALU

ST01FLA

Aluminium Cover for ST01, ST01RGB, painting in black or White

 Net Weight 0.019 kgs





STAR FLAT

ST01F

Stainless Steel 316L Cover for ST01, ST01RGB

 Net Weight 0.052kgs






STAR FLAT ALU

ST01FA

Aluminium Cover for ST01, ST01RGB, painting in black or White

 Net Weight 0.016kgs



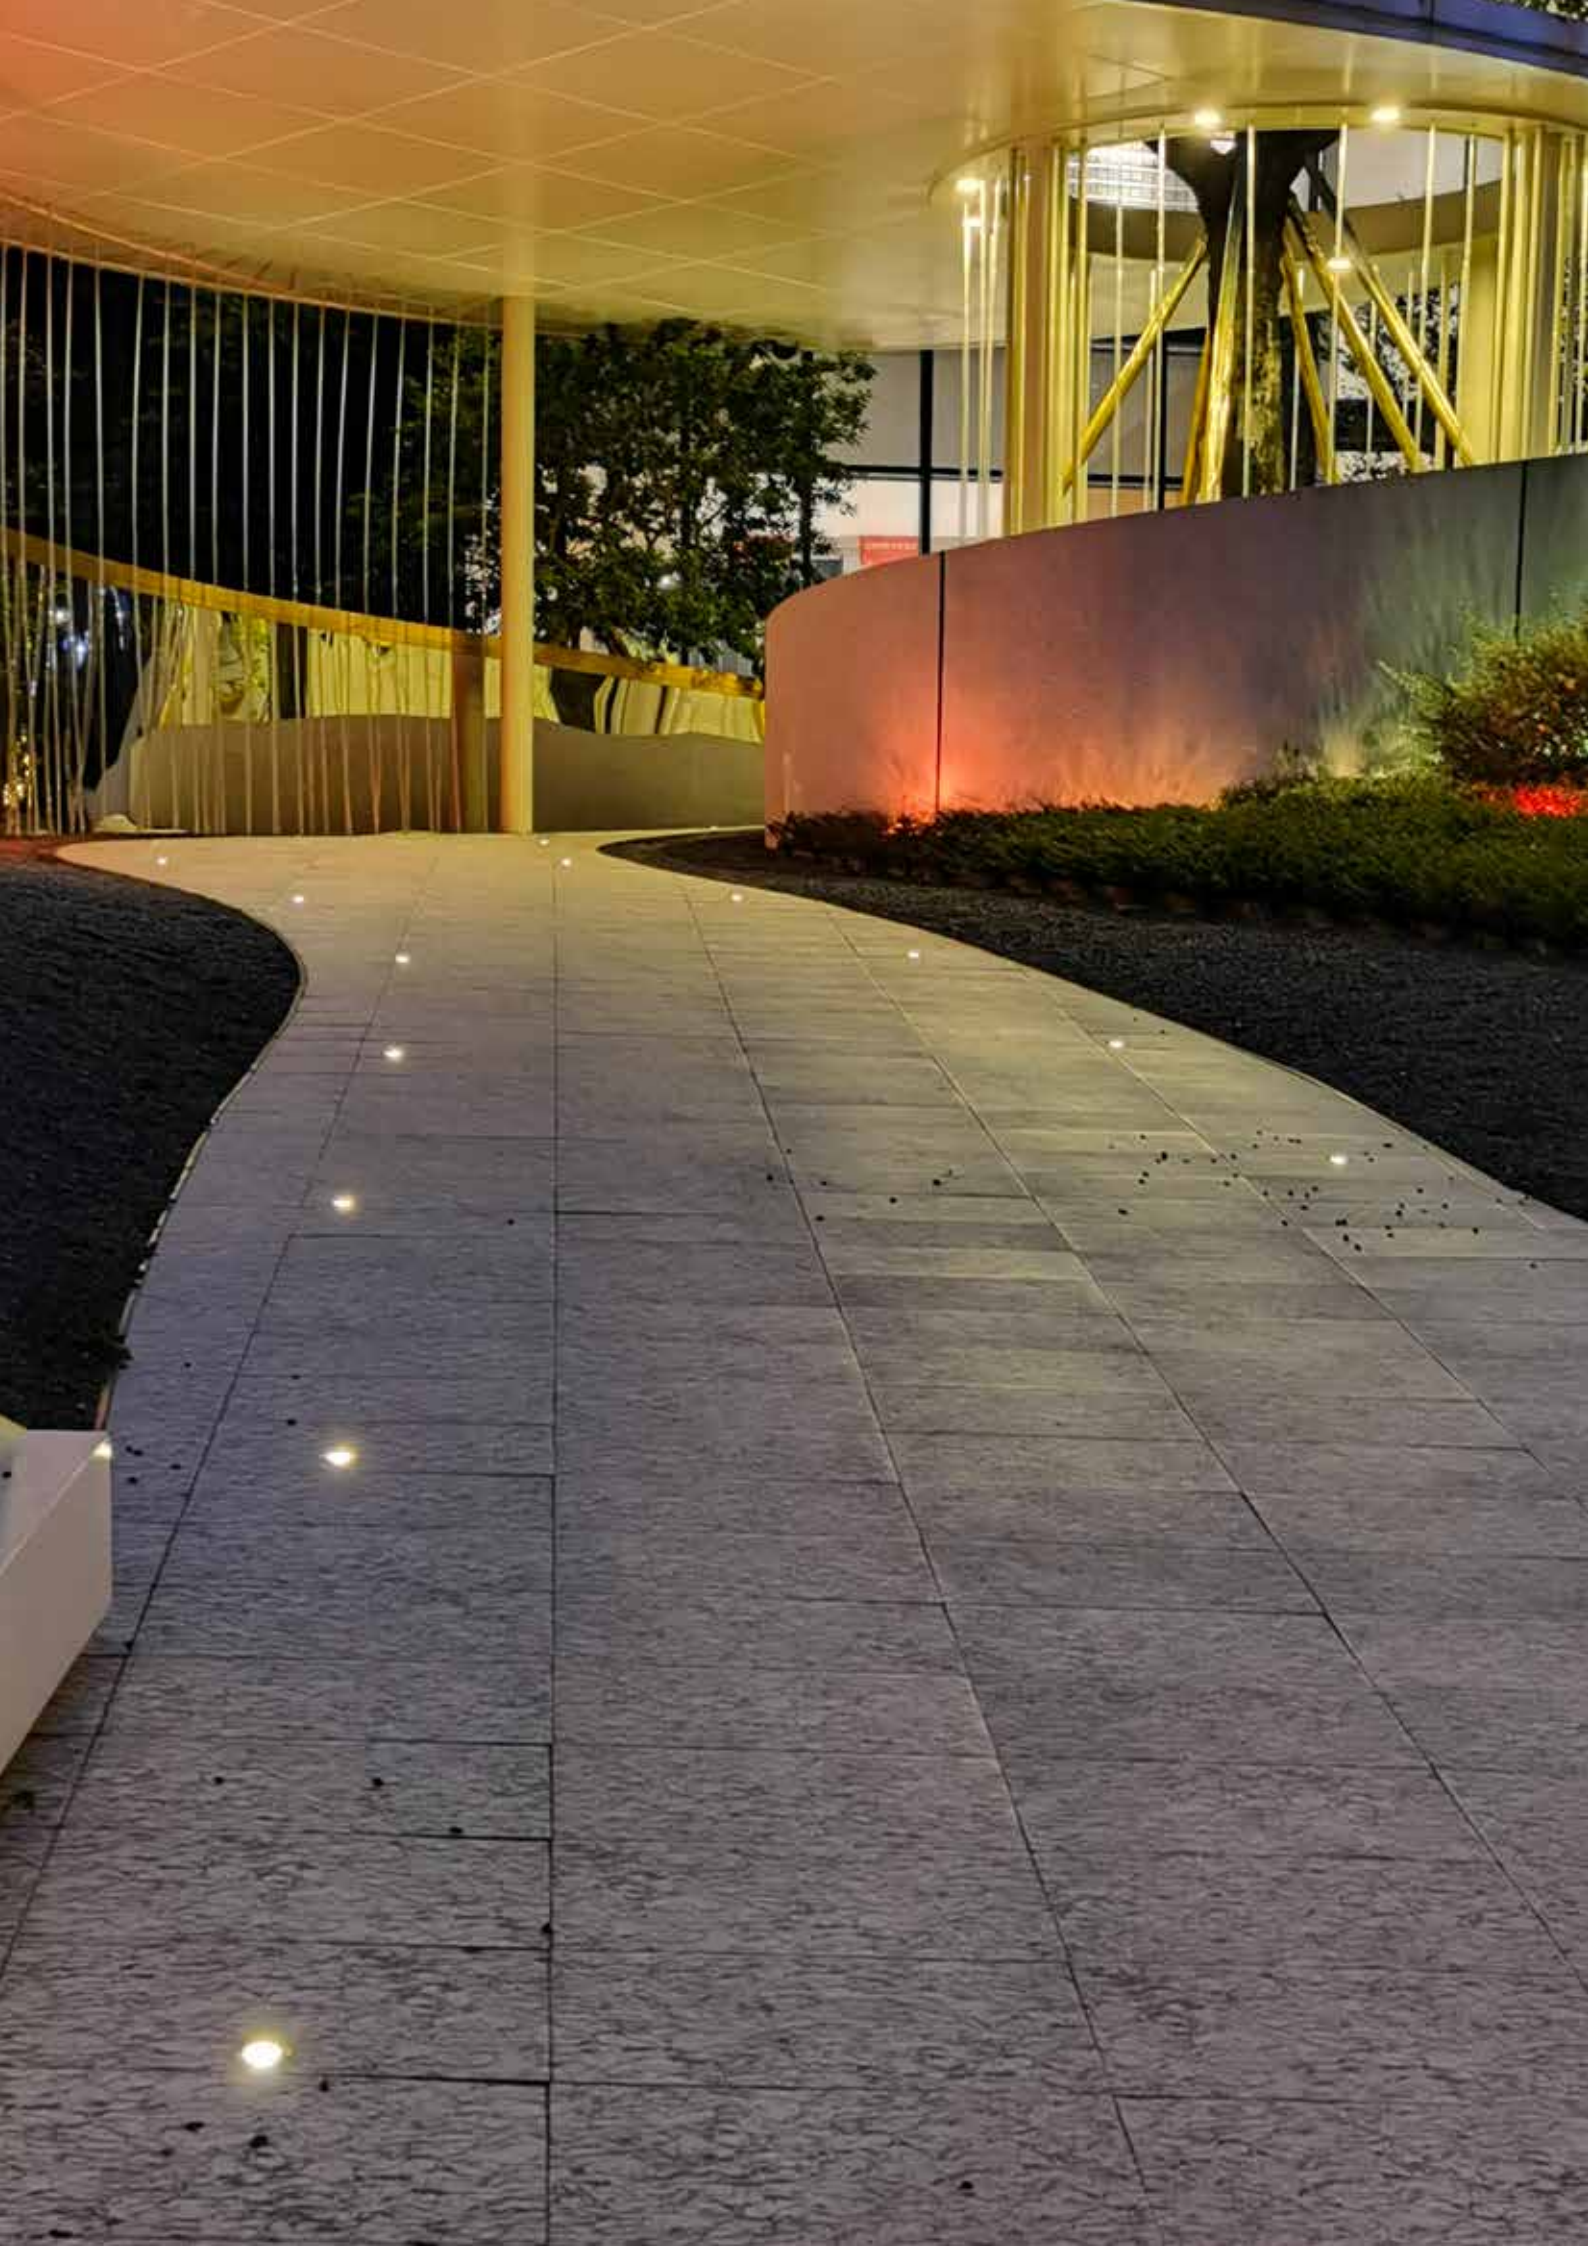





VENUS

VE03


-  IP67
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  750 kgs Max. Static Load
-  Net Weight 0.032 kgs
-  PVC 0.3M 2*0.34 mm²
-  OSRAM 3030 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years / Cover 15 Years Warranty



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
3 Watt	240 lm Without Cover	2700K 3000K 4000K 6000K	100°	DC12V or AC12V	7 Kinds of Covers Optional	Silver Grey Aluminium

Dimension

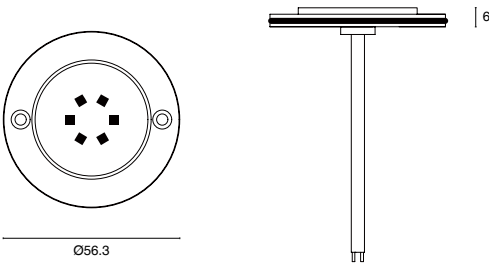

360° with Cover VE03A



Accessories

Screws



Included

VENUS RGB

VE03RGB


-  IP67
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  750 kgs Max. Static Load
-  Net Weight 0.035 kgs
-  PVC 0.3M 4*22#
-  Prolight 5050RGB 3in1 LED
-  5 Years / Cover 15 Years Warranty



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
2.5 Watt	70 lm All LEDs on	RGB	100°	DC12V	7 Kinds of Covers Optional	Silver Grey Aluminium

Dimension

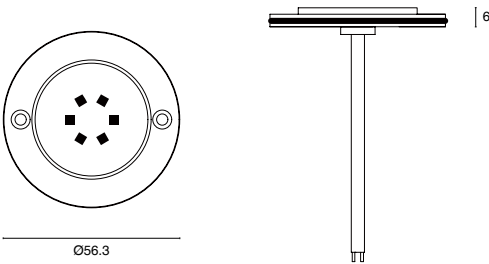

360° with Cover VE03A



Accessories

Screws



Included

VENUS RGBW

VE03RGBW


-  IP67
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  750 kgs Max. Static Load
-  Net Weight 0.035 kgs
-  PVC 0.3M 5*22#
-  Prolight 5050RGBW 4in1 LED
-  5 Years / Cover 15 Years Warranty



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
2.3 Watt	85 lm All LEDs on	RGBW6000K	100°	DC12V	7 Kinds of Covers Optional	Silver Grey Aluminium

Dimension

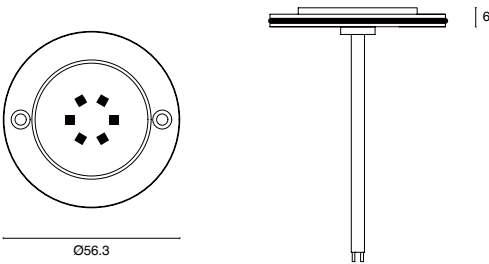

360° with Cover VE03A




Accessories

Screws



Included

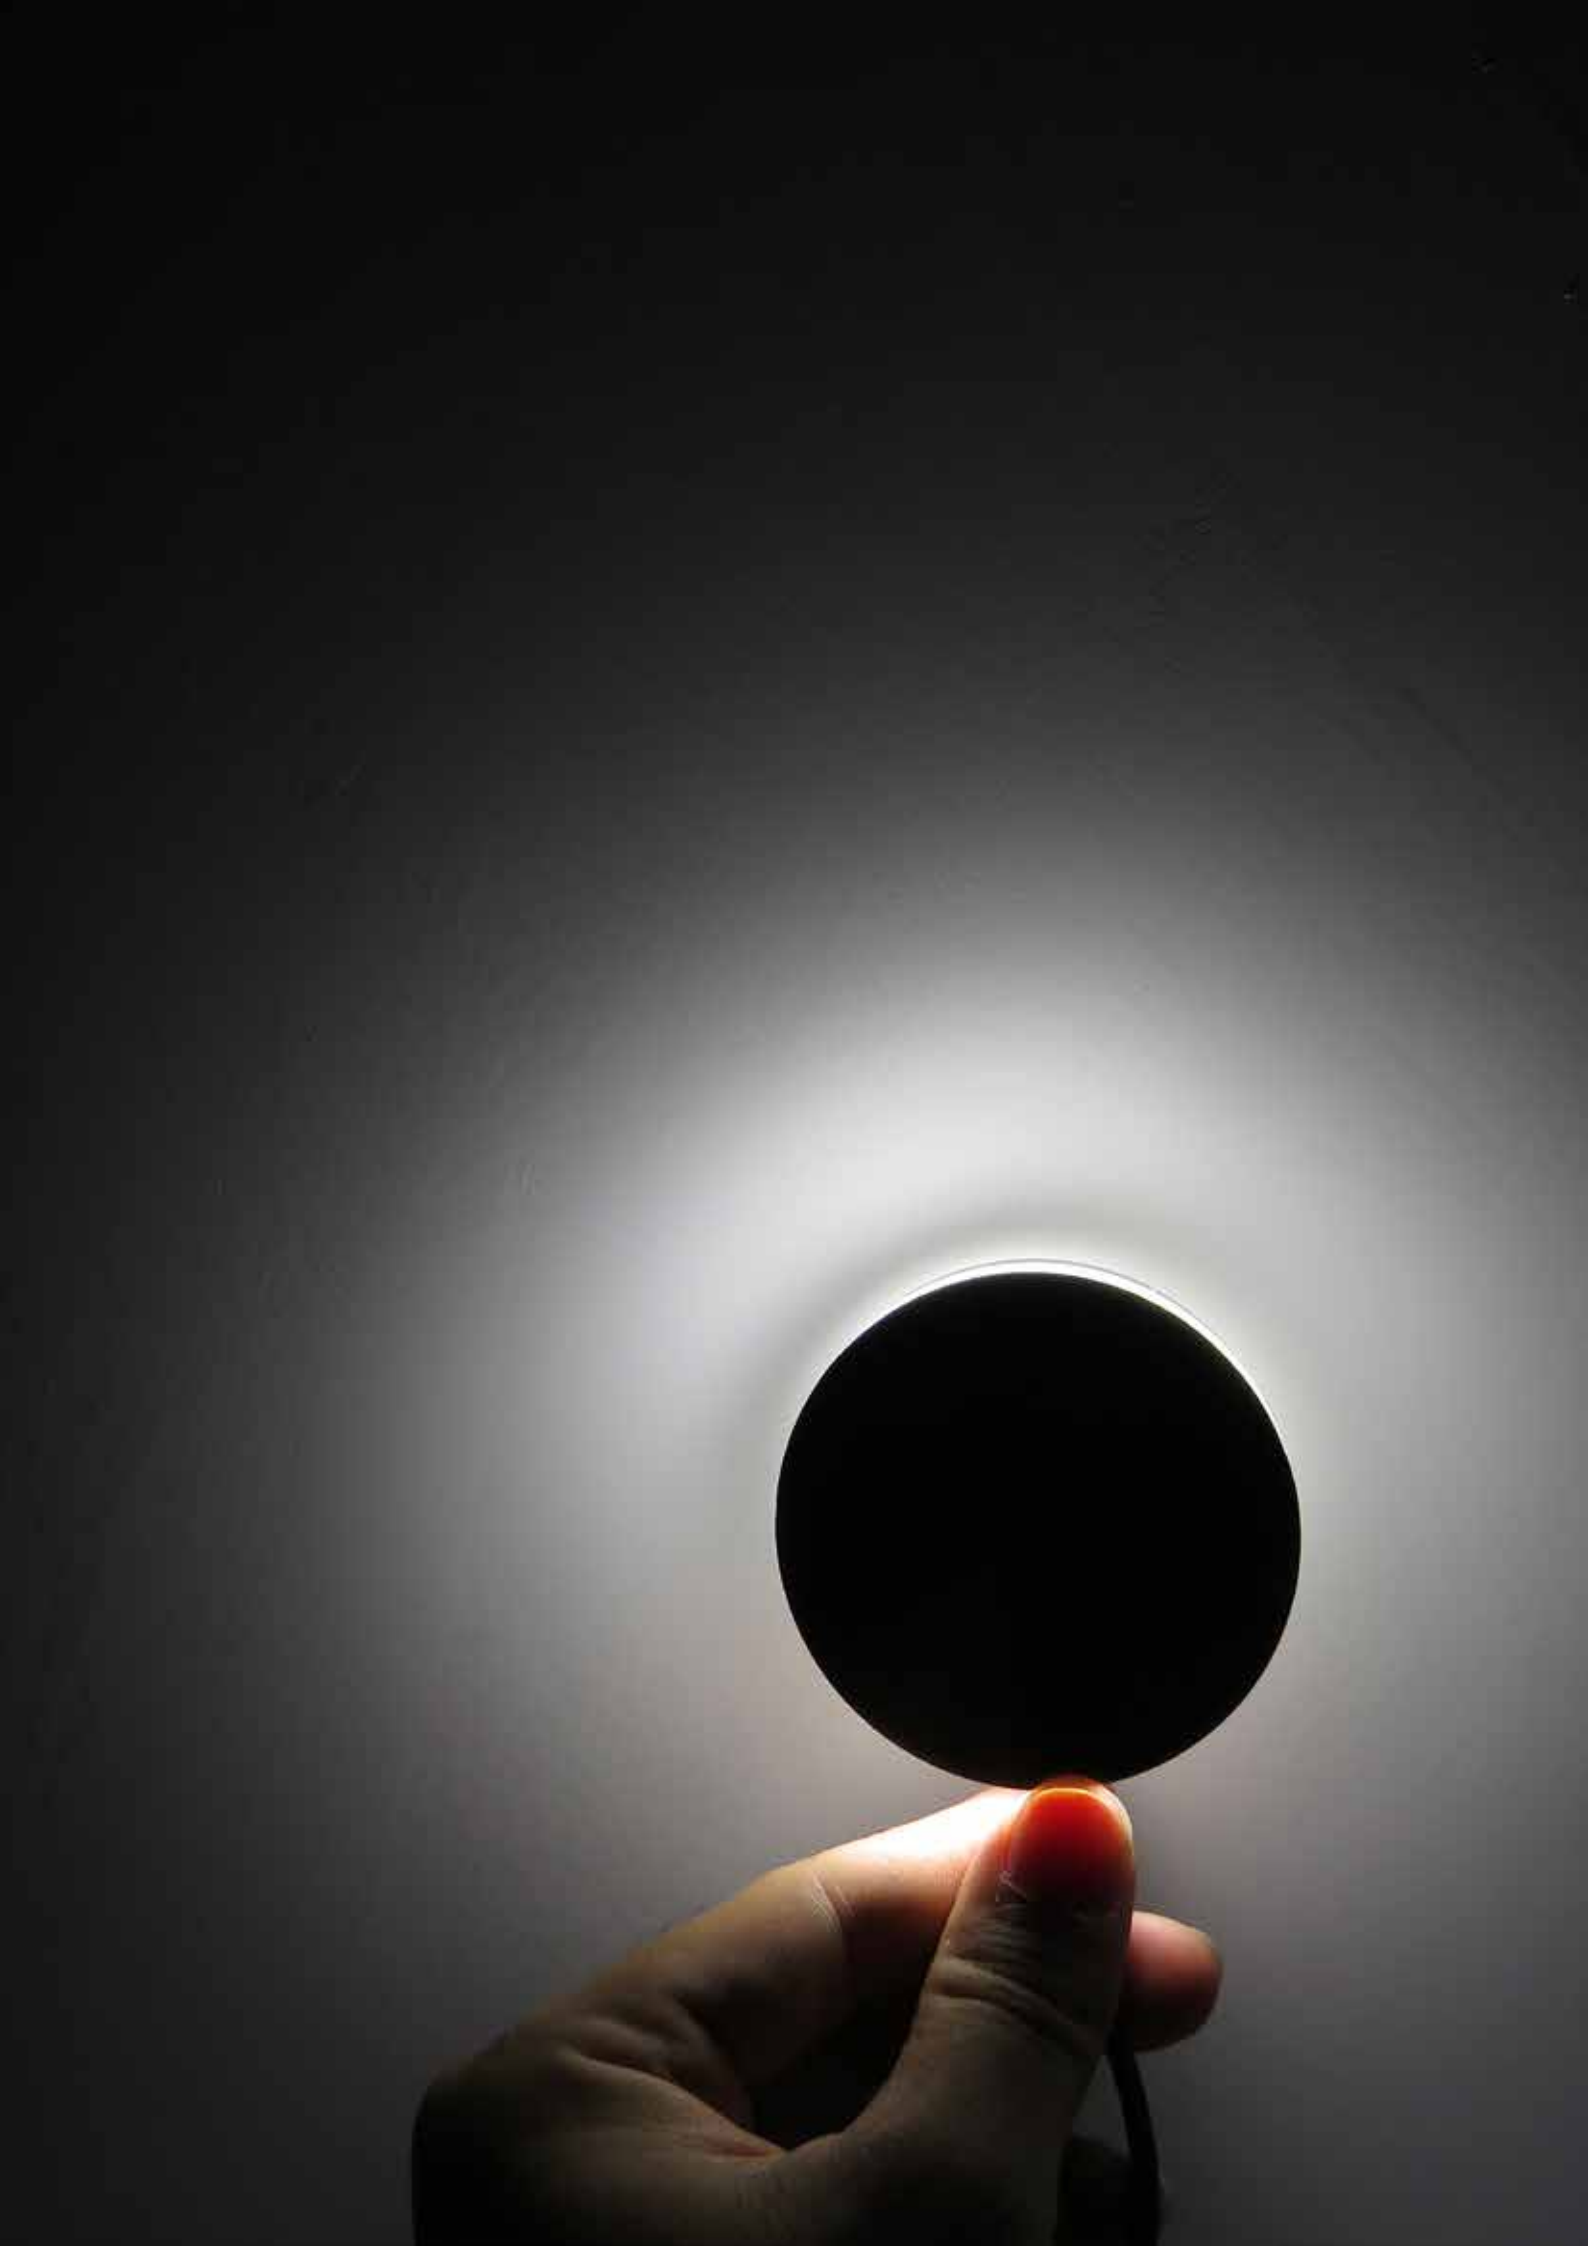


VENUS A

VE03A

Stainless Steel 316L Cover for VE03, VE03RGB, VE03RGBW

 Net Weight 0.063 kgs

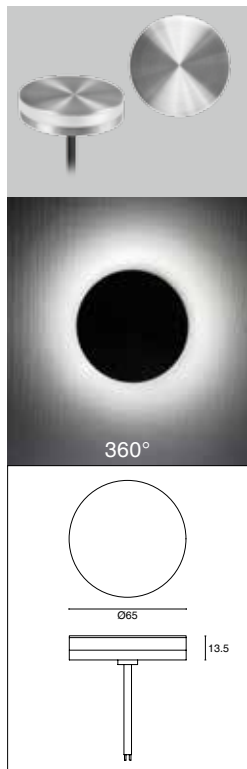


VENUS B

VE03B

Stainless Steel 316L Cover for VE03, VE03RGB, VE03RGBW

 Net Weight 0.083 kgs

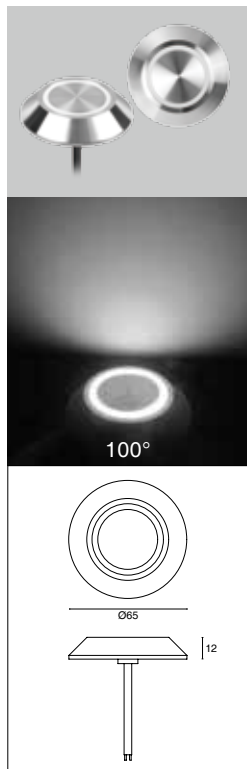


VENUS B OPAL

VE03BO

Stainless Steel 316L Cover for VE03, VE03RGB, VE03RGBW

 Net Weight 0.08 kgs

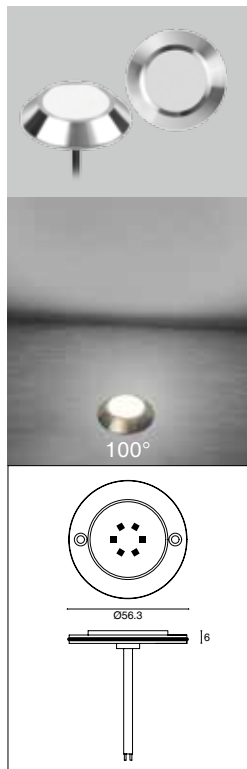

VENUS C1

VE03C1

Stainless Steel 316L Cover for VE03, VE03RGB, VE03RGBW

 Net Weight 0.118 kgs




VENUS C2

VE03C2

Stainless Steel 316L Cover for VE03, VE03RGB, VE03RGBW

 Net Weight 0.109 kgs

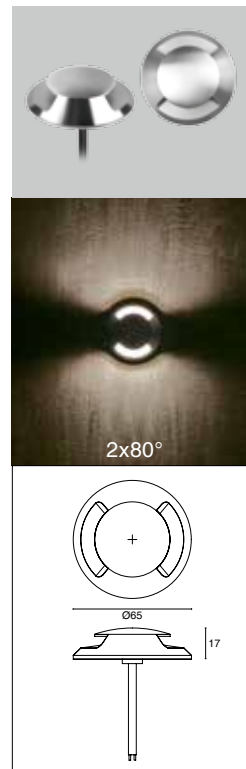


VENUS C3

VE03C3

Stainless Steel 316L Cover for VE03, VE03RGB, VE03RGBW

 Net Weight 0.11 kgs

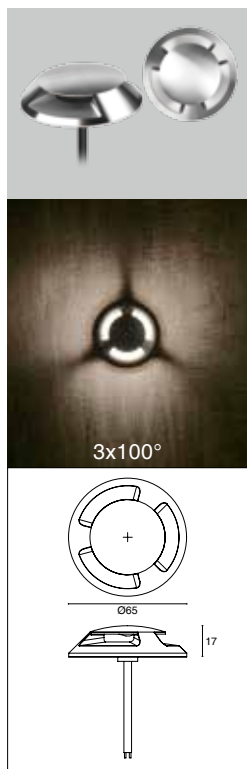


VENUS C4

VE03C4

Stainless Steel 316L Cover for VE03, VE03RGB, VE03RGBW

 Net Weight 0.107 kgs

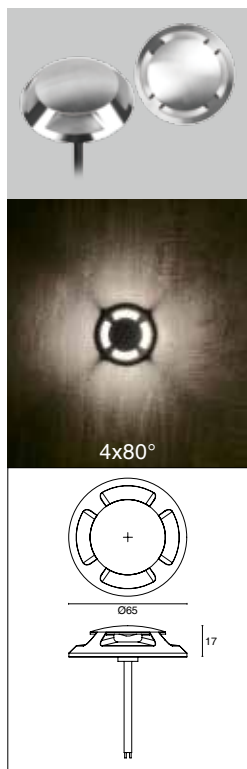







GARDEN SPOT LIGHTS SERIES

Products Features

These products are designed with solid 6063 AluMinum housing CNC machined for better cooling performance, with passivated (anodizing) + powder coated painting double anti-corrosion finishing for housing, optics PMMA Lens or

reflector with wonderful light output, Tempered Glass for high loading capacity, silicone gasket and special flat Cable gland for waterproof IP67 and high quality CREE LED

We make several series of garden lights to meet different application with different power, color, beam angle and zoomable optics, and the spot lights with replaceable MR16 Lamp are also available.

These products are with CE, ETL certifications

Application

These lights are widely used in the exterior or interior application, such as lighting columns, walls, architectural features, landscape features for the hotel, the garden, the park, the trees, the flowers etc.



IP67

CE





MARS 3

MA03

-  IP67
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.25kgs
-  Rubber Cable 1M 2*0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
3 Watt	130 lm	2700K 3000K 4000K 6000K	11°, 15°, 25°, 30°, 45°, 60°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Dark Grey as Standard or Coffee Red, Black, White

Dimension

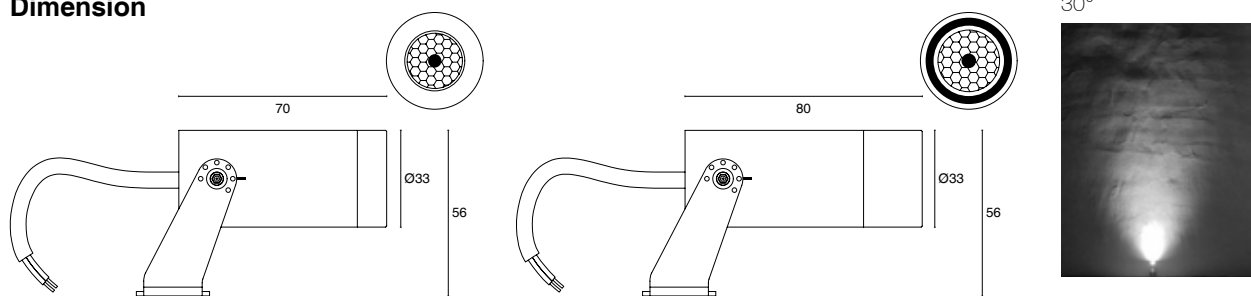

Accessories

Spike-205



Optional

Round Base D80



Optional

Pole 300mm/500mm/750mm



Optional

Flat Cover 3



Optional

Shield 3



Optional

MARS 6

MA06

-  IP67
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.45kgs
-  Rubber Cable 1M 2*0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:




General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
6 Watt	500 lm	2700K 3000K 4000K 6000K	15°, 24°, 36°, 60°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Dark Grey as Standard or Coffee Red, Black, White

Dimension

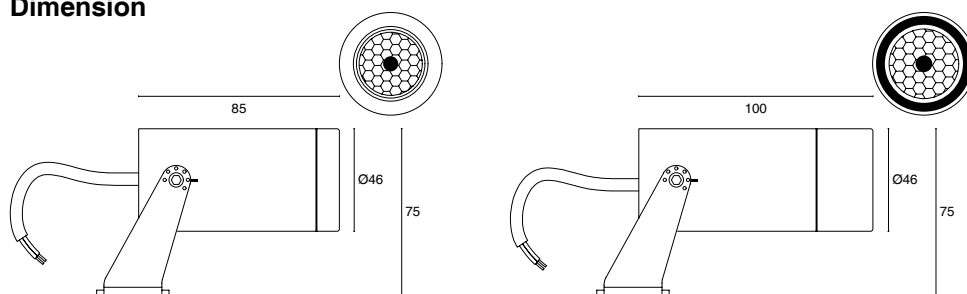

36°



Accessories

Spike-205



Optional

Round Base D80



Optional

Pole 300mm/500mm/750mm



Optional

Flat Cover 6



Optional

Shield 6



Optional





MARS 15

MA15

-  IP67
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.8kgs
-  Rubber Cable 1M 2*0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
13.5 Watt	918 lm	2700K 3000K 4000K 6000K	10°, 23°, 36°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Dark Grey as Standard or Coffee Red, Black, White

Dimension

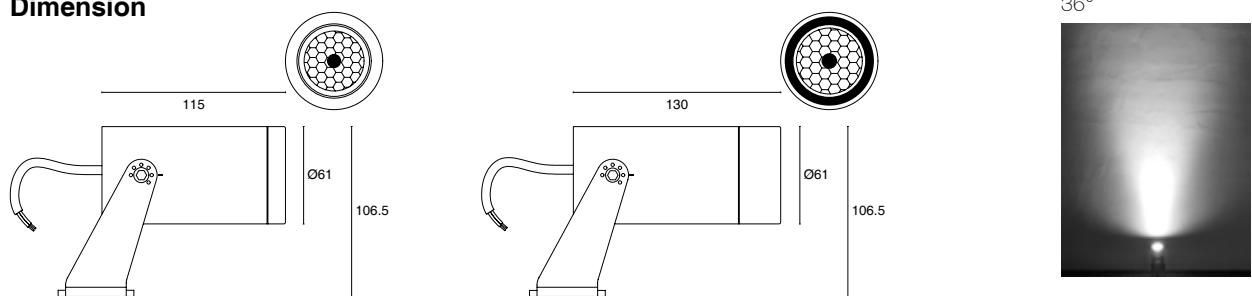

Accessories

Spike-205



Optional

Round Base D80



Optional

Pole 300mm/500mm/750mm



Optional

Flat Cover 15



Optional

Shield 15



Optional

MARS 25

MA25

-  IP67
-  IK04
-  Class III
-  CE Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 1.6kgs
-  Rubber Cable 1M 2*0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:




General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
25 Watt	2100 lm	2700K 3000K 4000K 6000K	10°, 23°, 36°	DC24V as Standard (AC100- 245V 50/60Hz Optional)	Aluminium	Aluminium in Dark Grey as Standard or Coffee Red, Black, White

Dimension

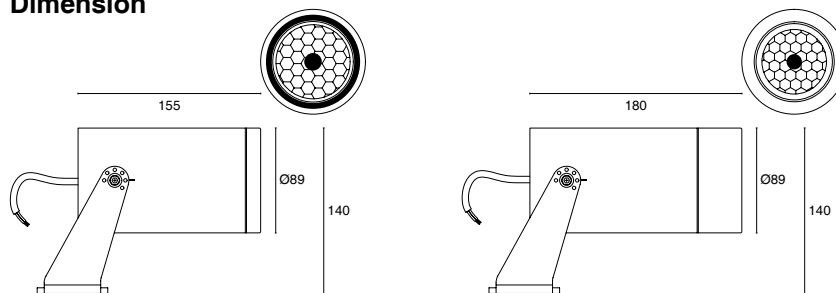

36°



Accessories

Spike-205



Optional

Flat Cover 25



Optional

Shield 25



Optional





CERES ZOOM 4

CZ04

-  IP67
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.4kgs
-  Rubber Cable 1M 2*0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty





Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
4 Watt	130 lm @15° 230 lm @36°	2700K 3000K 4000K 6000K	Zoom 15° to 36°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Dark Grey as Standard or Coffee Red, Black, White

Dimension

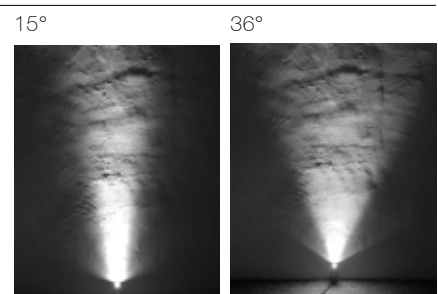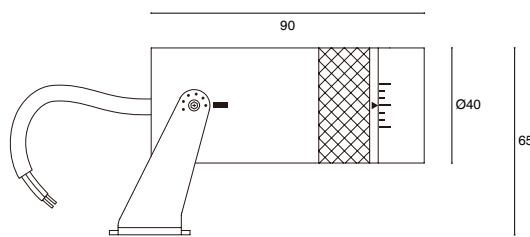

Accessories

Spike-205



Optional

Round Base D80



Optional

Pole 300mm/500mm/750mm



Optional

CERES ZOOM 8

CZ08

-  IP67
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.45kgs
-  Rubber Cable 1M 2*0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
8 Watt	500 lm @15°	2700K	Zoom 15° to 36° Zoom 35° to 60°	DC24V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Dark Grey as Standard or Coffee Red, Black, White
	620 lm @36°	3000K				
	480 lm @35°	4000K				
	600 lm @60°	6000K				

Dimension

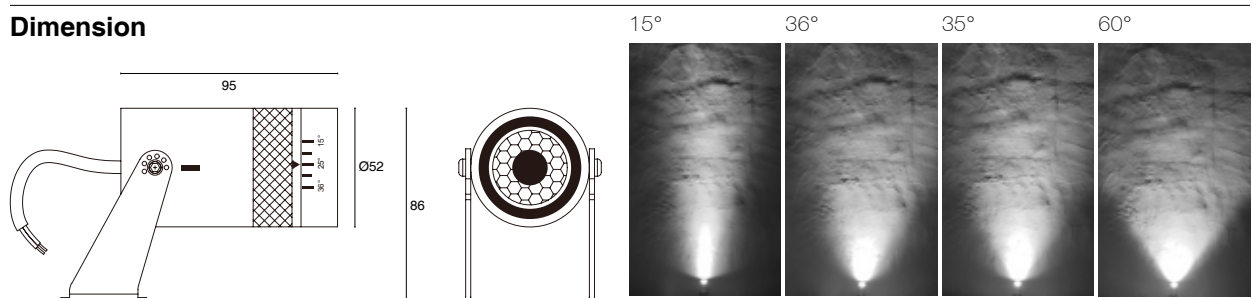

Accessories

Spike-205



Optional

Round Base D80



Optional

Pole 300mm/500mm/750mm



Optional





CERES ZOOM 12

CZ12

-  IP67
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.6kgs
-  Rubber Cable 1M 2*0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
12 Watt	900 lm @15°	2700K	Zoom 15° to 36° Zoom 35° to 60°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Dark Grey as Standard or Coffee Red, Black, White
	1000 lm @36°	3000K				
	900 lm @35°	4000K				
	1000 lm @60°	6000K				

Dimension

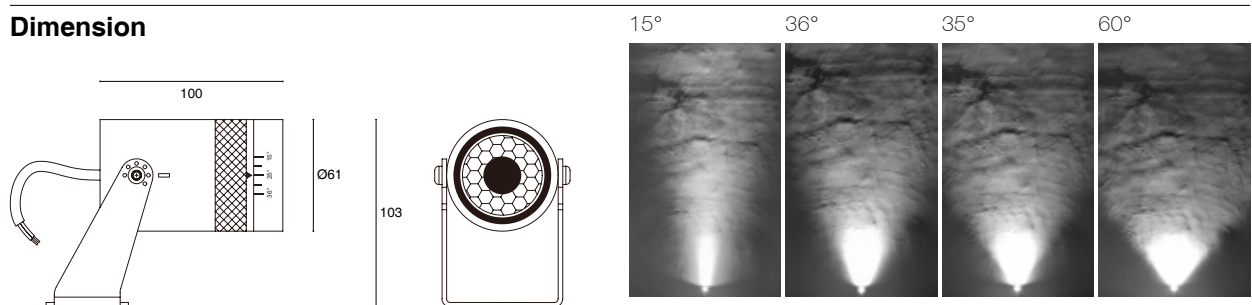

Accessories

Spike-205



Optional

Round Base D80



Optional

Pole 300mm/500mm/750mm



Optional

CERES ZOOM 18

CZ18

-  IP67
-  IK04
-  Class III
-  CE Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 1.3kgs
-  Rubber Cable 1M 2*0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty





Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
18 Watt	1200 lm @15°	2700K	Zoom 15° to 36° Zoom 35° to 60°	DC24V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Dark Grey as Standard or Coffee Red, Black, White
	1500 lm @36°	3000K				
	1300 lm @35°	4000K				
	1450 lm @60°	6000K				

Dimension

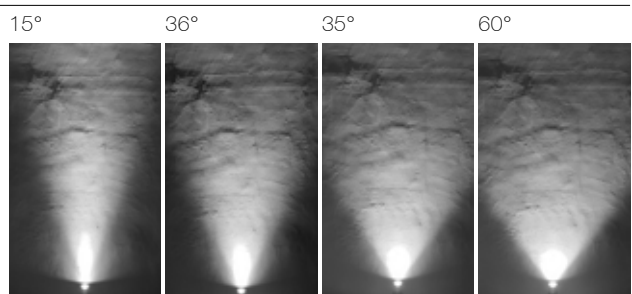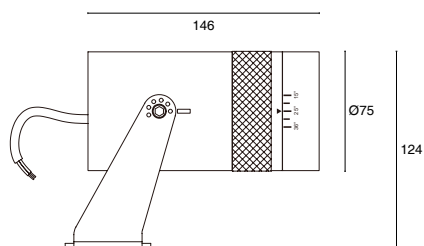

Accessories

Spike-205



Optional





CERES ZOOM 25

CZ25

-  IP67
-  IK04
-  Class III
-  CE Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 1.7kgs
-  Rubber Cable 1M 2*0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty





Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
25 Watt	1800 lm @15°	2700K	Zoom 15° to 36° Zoom 35° to 60°	DC24V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Dark Grey as Standard or Coffee Red, Black, White
	2500 lm @36°	3000K				
	1800 lm @35°	4000K				
	2150 lm @60°	6000K				

Dimension

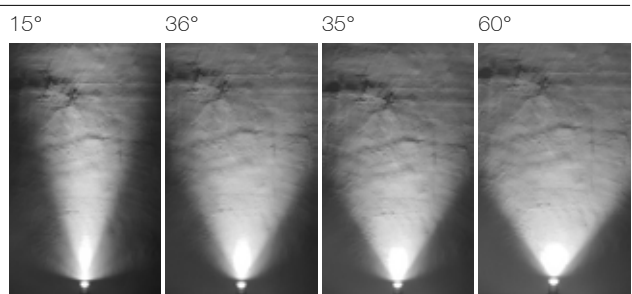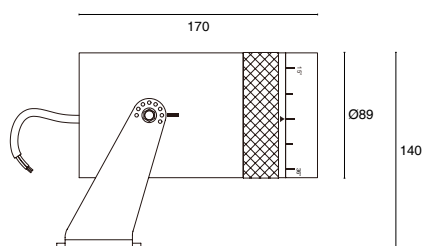

Accessories

Spike-205



Optional



MARS MR16
MAMR16

-  IP67
-  IK04
-  Class III
-  CE Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.53kgs
-  Rubber Cable 1M 2*0.824mm²
-  For Fitting MR16 Lamp with Totally Height 54mm at Max (Including Pins)
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



• **General Data**

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
Without MR16 Lamp	/	/	/	AC12V	Aluminium	Aluminium in Dark Grey as Standard or Coffee Red, Black, White

• **Dimension**

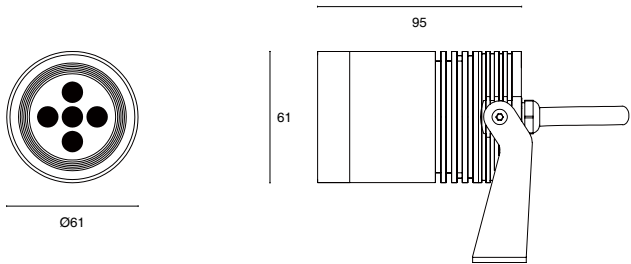

• **Accessories**

Spike-205



Optional

Round Base D80



Optional

Pole 300mm/500mm/750mm



Optional

Shield



Optional

MARS MR16-UP

MAMR16U

-  IP67
-  IK04
-  Class III
-  CE Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.53kgs
-  Rubber Cable 1M 2*0.824mm²
-  For Fitting MR16 Lamp with Totally Height 45-54mm with Up-Down Spring. (Including Pins)
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



• **General Data**

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
Without MR16 Lamp	/	/	/	AC12V	Aluminium	Aluminium in Dark Grey as Standard or Coffee Red, Black, White

• **Dimension**

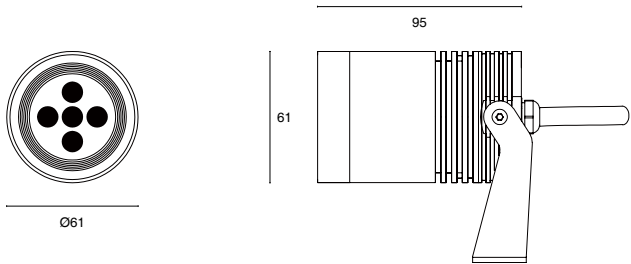

• **Accessories**

Spike-205



Optional

Round Base D80



Optional

Pole 300mm/500mm/750mm



Optional

Shield



Optional









LED LAWN LIGHTS SERIES

Products Features

These products are designed with solid 6063 AluMinum housing CNC machined for better cooling performance, with passivated (anodizing) + powder coated painting double anti-corrosion finishing for housing, optics PMMA Lens or reflector with wonderful light output, Tempered Glass for high loading capacity, silicone gasket and Cable gland for waterproof IP67 and high quality CREE ,OSRAM LED. We make several series of LED LAWN LIGHTS to meet different application with different size, power, color, beam angle.

These products are with CE, ETL certifications

Application


These lights are widely used in the exterior or interior application, such as lighting roads, lawn, landscape features for the hotel, the garden, the park, the trees, the flowers etc.



IP65

CE



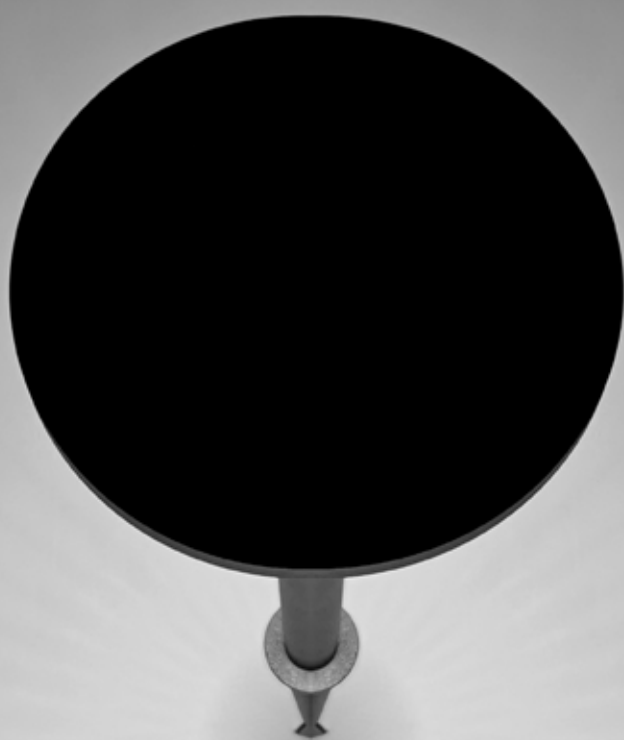

LIBRA MINI FA
LI03FA

-  IP65
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.3kgs
-  Rubber Cable 1M 2*0.824mm²
-  OSRAM 2835 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



• **General Data**

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
3.5 Watt	80 lm	2700K 3000K 4000K 6000K	75°	AC12V as Standard (DC12- 24V Optional)	Aluminium	Aluminium in Coffee Red as Standard or Dark Grey, Black, White

• **Dimension**



75°



• **Accessories**

Spike-205




Included



LIBRA MINI MA

LI03MA

-  IP65
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.53kgs
-  Rubber Cable 1M 2*0.824mm²
-  OSRAM 2835 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty

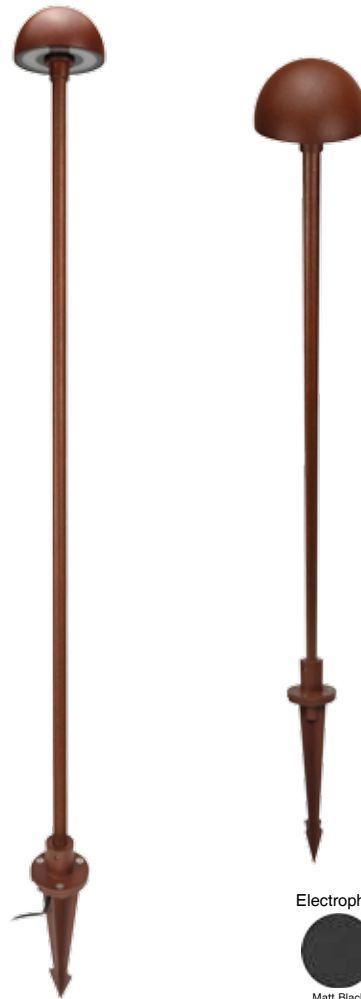


Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
3.5 Watt	80 lm	2700K 3000K 4000K 6000K	75°	AC12V as Standard (DC12- 24V Optional)	Aluminium	Aluminium in Coffee Red as Standard or Dark Grey, Black, White

Dimension



75°



Accessories

Spike-205



Included



LIBRA LA

LILA09

-  IP65
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 1.2kgs with 516.5mm Pole, Spike Base
-  Rubber Cable 1.5M 2*0.824mm²
-  OSRAM 2835 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:




General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
9 Watt	700 lm	2700K 3000K 4000K 6000K	100°	AC12V as Standard (DC12- 24V Optional)	Aluminium	Aluminium in Dark Grey as Standard or Coffee Red, Black, White

Dimension

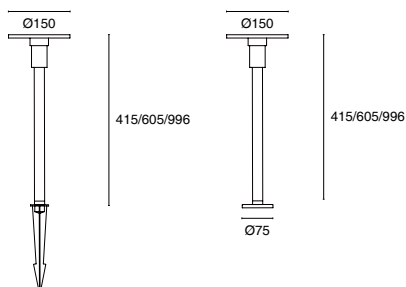

100°



Accessories

Spike-205



Included

Base-75



Included

Pedal



Included

Pole 326.5mm / 516.5MM /
906.5MM



Optional

LIBRA LA (SOLAR)
LILAS02

-  IP65
-  IK04
-  Class III
-  CE Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 1.27kgs with 516.5mm Pole, Spike Base
-  No Cables
-  OSRAM 2835 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:




• **General Data**

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
2 Watt	70 lm	2700K 3000K 4000K 6000K	100°	With Lithium Battery 3.7V 3700mAh	Aluminium	Aluminium in Dark Grey as Standard or Coffee Red, Black, White

• **Dimension**

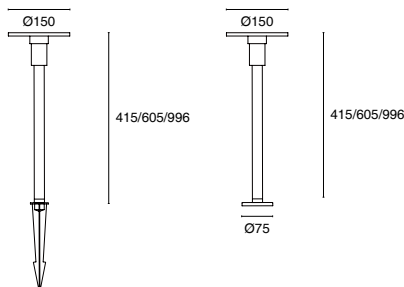

100°



• **Accessories**

Spike-205



Included

Base-75



Included

Pedal



Included

Pole 326.5mm / 516.5MM /
906.5MM



Optional





LIBRA XSPOT

LIX12

-  IP65
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 2kgs with 906.5mm Pole, Spike Base
-  Rubber Cable 2M 2*0.824mm²
-  OSRAM 2835 LED +CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
12 Watt	1000 lm	2700K 3000K 4000K 6000K	100° for disc and 15°, 24°, 36°, or 60° for the spot	AC12V as Standard (DC12- 24V Optional)	Aluminium	Aluminium in Dark Grey as Standard or Coffee Red, Black, White

Dimension

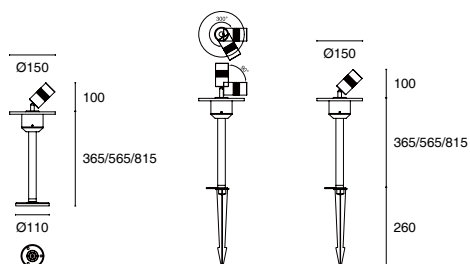

100°+15°



Accessories

Spike-205



Included

Base-75



Included

Pedal



Included

Pole 326.5mm / 516.5MM /
906.5MM



Optional



PISCES 1ASYM 300 / PISCES 1ASYM 600

300MM VERSION: PS121300 /
600mm VERSION: PS121600

-  IP65
-  IK06
-  Class III
-  CE Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 2.2kgs for 600mm Version
-  Rubber Cable 1M 2*0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
12 Watt	230 lm	2700K 3000K 4000K 6000K	Asymmetrical 60°x60°	AC12V as Standard (AC100-245V Optional)	Aluminium	Aluminium in Dark Grey as Standard or Coffee Red, Black, White

Dimension



60°x60°



Accessories

Anchor Bolts and Screws for Pisces,
For Lawn Installation by Filling Concrete



Optional

Mounting Parts with Screws



Included

PISCES 2ASYM 300 / PISCES 2ASYM 600

300MM VERSION: PS122300 /
600mm VERSION: PS122600

-  IP65
-  IK06
-  Class III
-  CE Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 2.2kgs for 600mm Version
-  Rubber Cable 1M 2*0.824mm²
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
12 Watt	350 lm	2700K 3000K 4000K 6000K	2x Asymmetrical 60°x60°	AC12V as Standard (AC100-245V Optional)	Aluminium	Aluminium in Dark Grey as Standard or Coffee Red, Black, White

Dimension



2x60°x60°



Accessories

Anchor Bolts and Screws for Pisces,
For Lawn Installation by Filling Concrete




Optional

Mounting Parts with Screws



Included

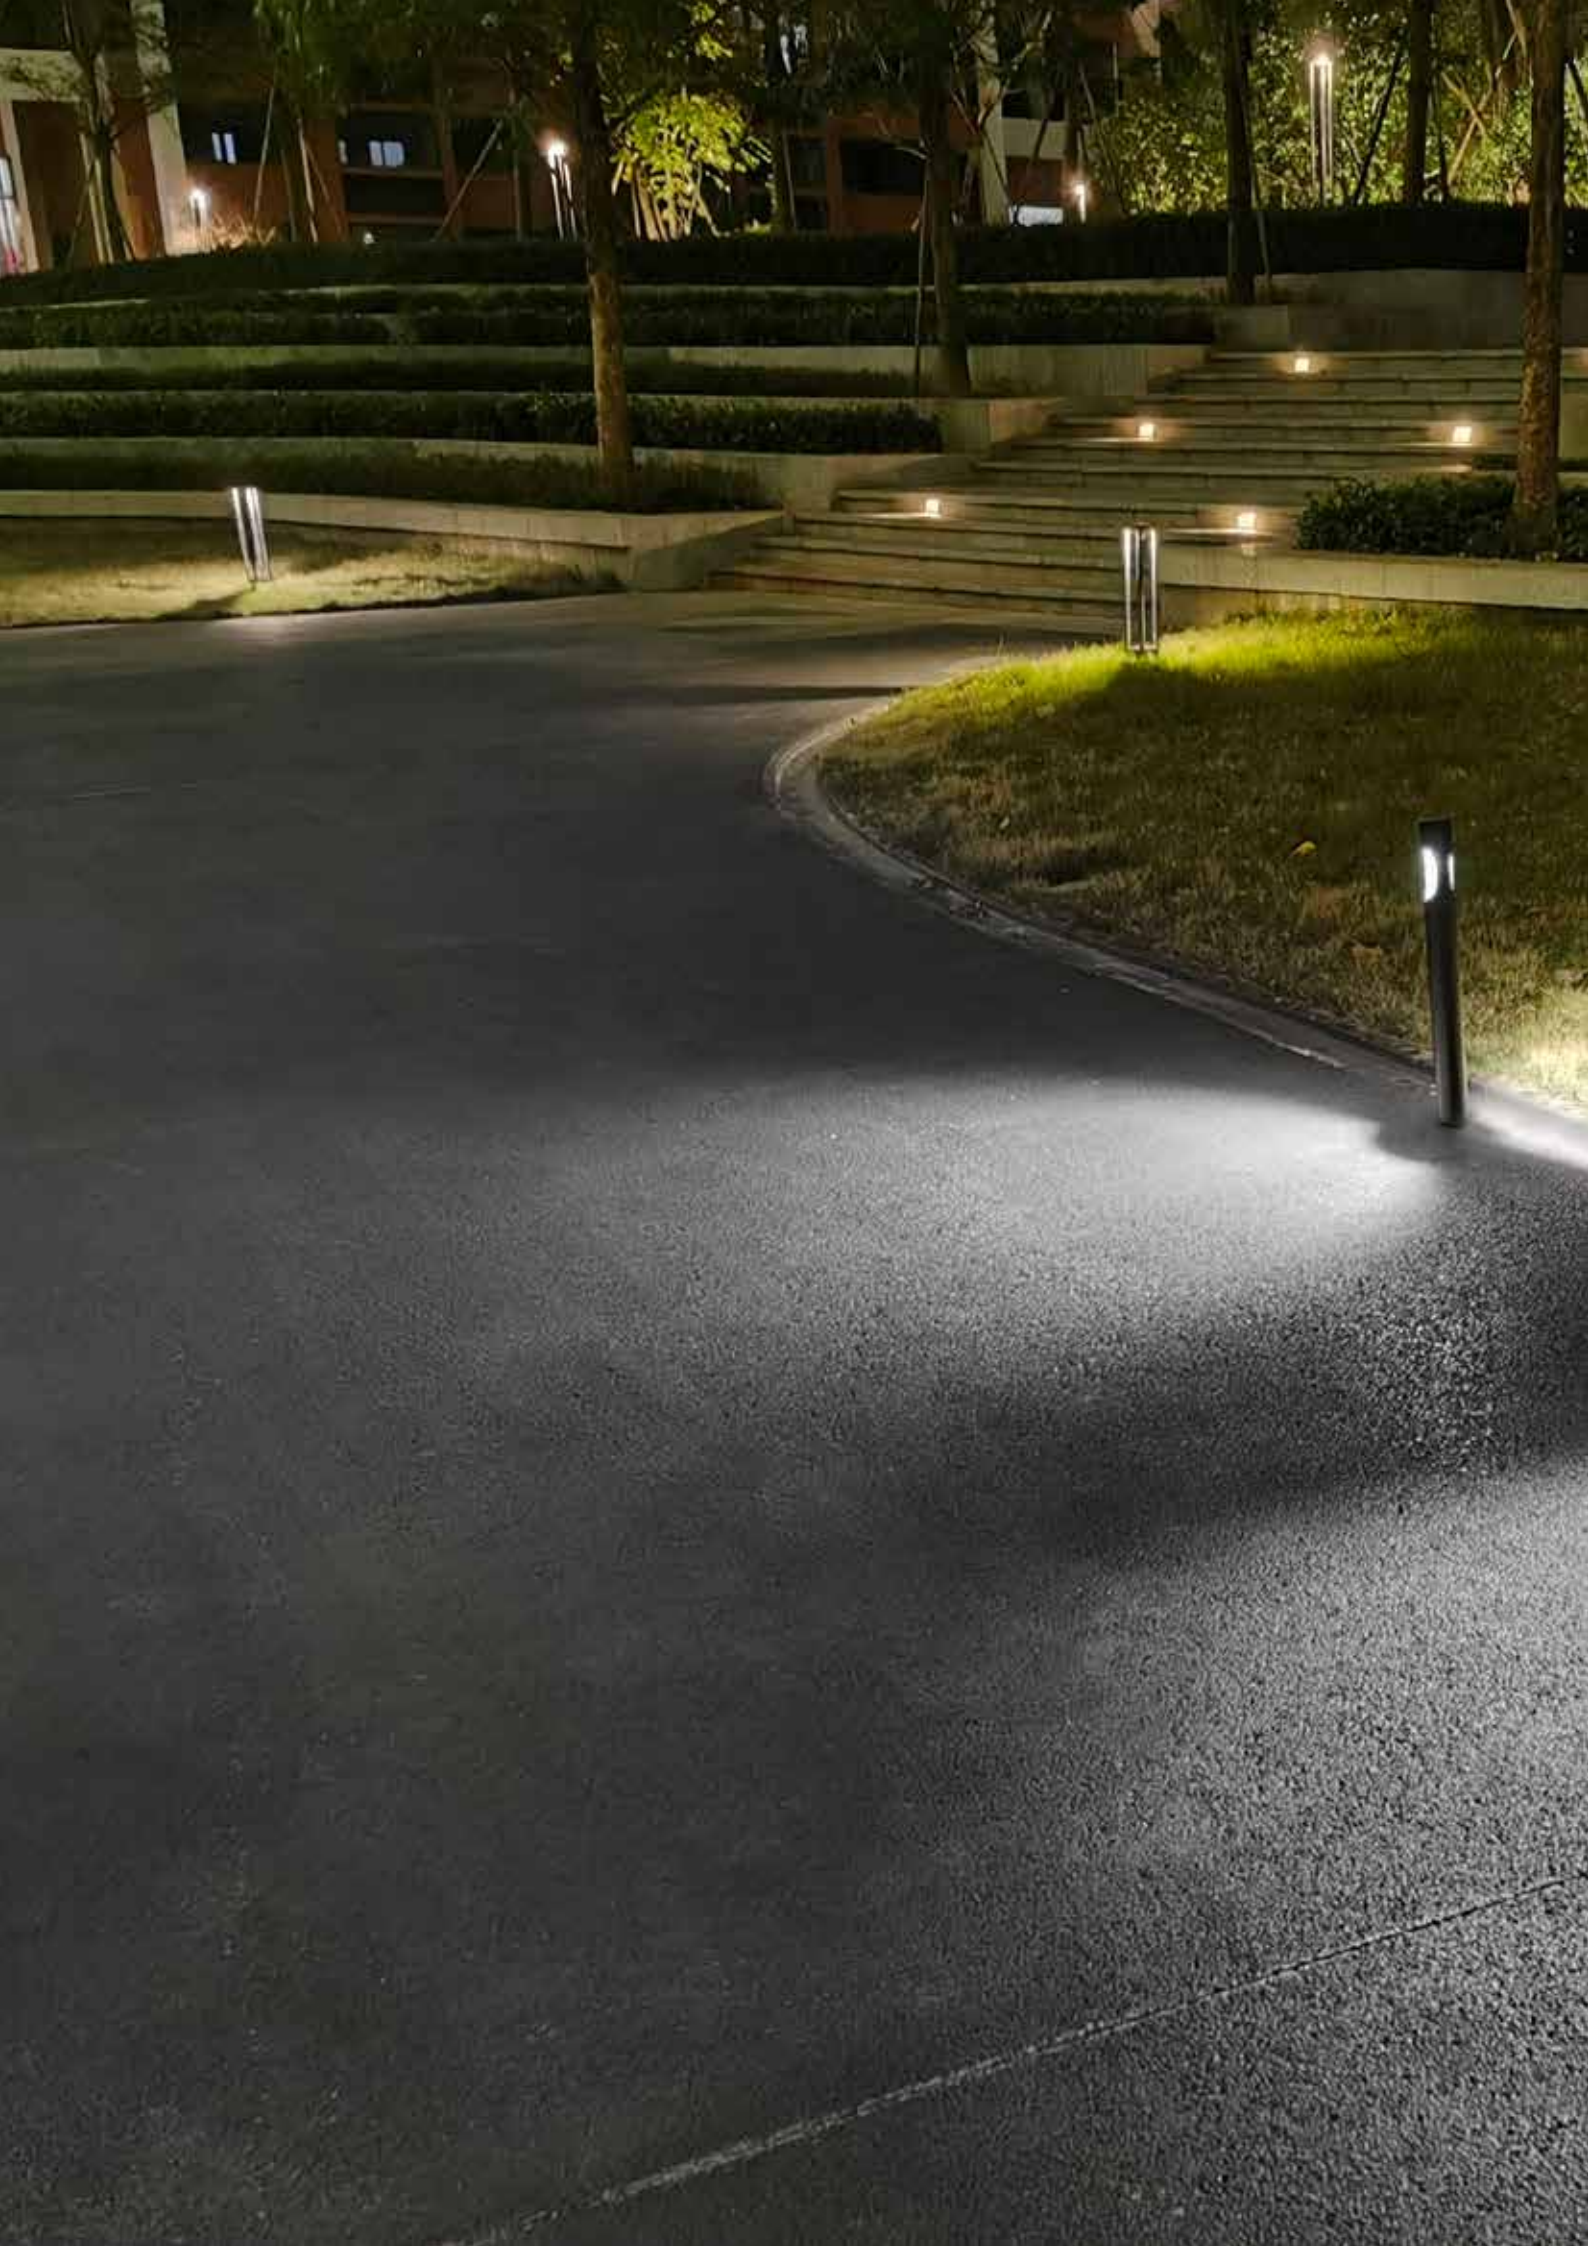



WALL LIGHTS SERIES

Products Features

These products are available in step lights, wall luminaire that are designed with solid 6063 Aluminum housing CNC machined for better cooling

performance ,with passivated (anodizing) +powder coated painting double anti-corrosion finishing for housing, optics PMMA Lens or reflector with wonderful light output, Tempered Glass for high loading capacity,silicone gasket and Cable

gland for waterproof IP65 and high quality CREE ,OSRAM LED

We make several series of WALL LIGHTS to meet different application with different size, power, color, beam angle.

These products are with CE, ETL certifications

Application

These lights are widely used in the exterior or interior application,such as lighting stairs, corner of walls for the house, hotel, the garden,the park etc.



IP65

CE






JUPITER 4A

JU04A


-  IP65
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  Net Weight 0.369kgs
-  PVC Cable 0.3M 2*20#
-  OSRAM 2835 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty

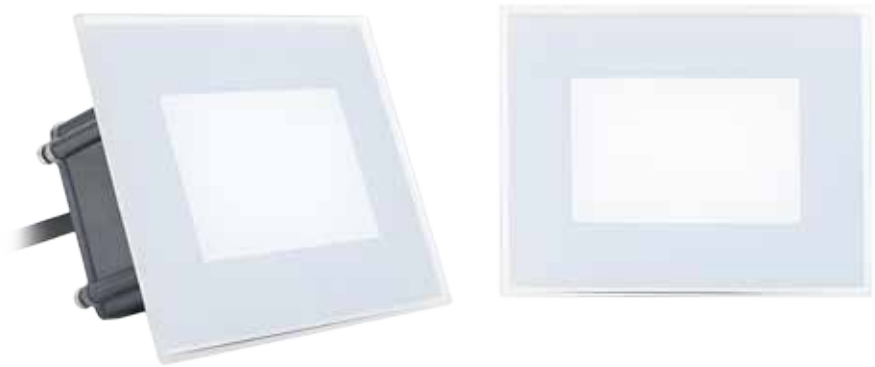


General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
4 Watt	120 lm	2700K 3000K 4000K 6000K	120°	AC12V as Standard (DC12- 24V Optional)	Tempered Milky White Glass	Aluminium in Dark Grey

Dimension

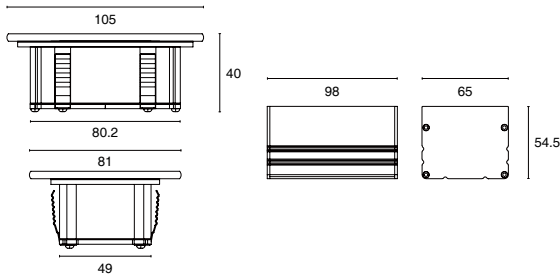

120°



Accessories

Mounting Box



Included

JUPITER 3B

JU03B


-  IP65
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  Net Weight 0.369kgs
-  PVC Cable 0.3M 2*20#
-  OSRAM 2835 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
3 Watt	160 lm	2700K 3000K 4000K 6000K	Asymmetric Downward 45°x120°	AC12V as Standard (DC12- 24V Optional)	Tempered Glass	Aluminium in Dark Grey

• Dimension

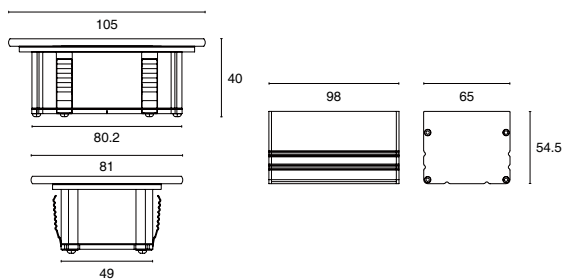

45°x120°



• Accessories

Mounting Box



Included





JUPITER 8A

JU08A


-  IP65
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  Net Weight 0.45kgs
-  PVC Cable 0.3M 2*20#
-  OSRAM 2835 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




• **General Data**

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
8 Watt	210 lm	2700K 3000K 4000K 6000K	120°	AC12V as Standard (DC12- 24V Optional)	Tempered Milky White Glass	Aluminium in Dark Grey

• **Dimension**

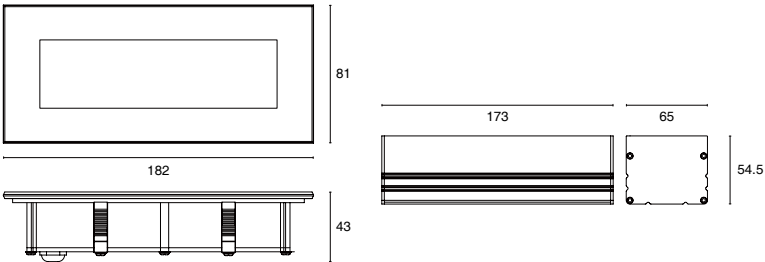

120°



• **Accessories**

Mounting Box



Included

JUPITER 5B

JU05B



-  IP65
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  Net Weight 0.45kgs
-  PVC Cable 0.3M 2*20#
-  OSRAM 2835 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
5 Watt	380 lm	2700K 3000K 4000K 6000K	Asymmetric Downward 45°x120°	AC12V as Standard (DC12- 24V Optional)	Tempered Glass	Aluminium in Dark Grey

Dimension

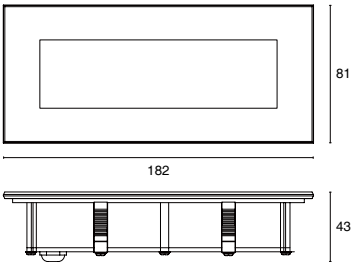

45°x120°



Accessories

Mounting Box



Included





PLUTO 3A

PL03A


-  IP65
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  Net Weight 0.25kgs
-  PVC Cable 0.3M 2*20#
-  CREE XPE2 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
3 Watt	110 lm	2700K 3000K 4000K 6000K	Asymmetric Downward 40°x30°	AC12V as Standard (DC12- 24V Optional)	Aluminium in Black Colour, or White or Polished Chrome, or Satin Nickel as Options	Aluminium

Dimension

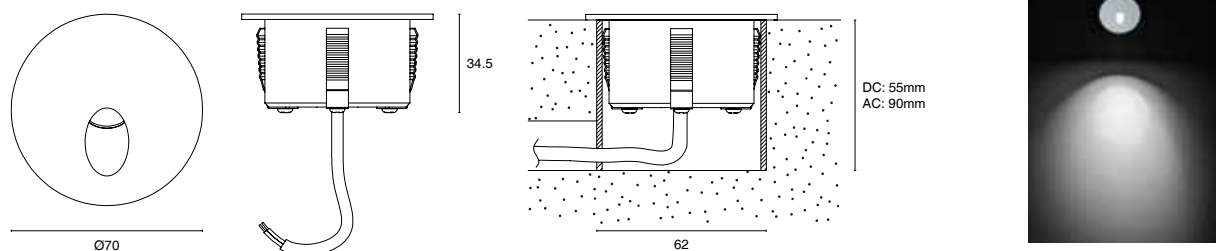

Accessories

Mounting Tube




Included

PLUTO 3AS

PL03A SQUARE




-  IP65
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  Net Weight 0.26kgs
-  PVC Cable 0.3M 2*20#
-  CREE XPE2 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty

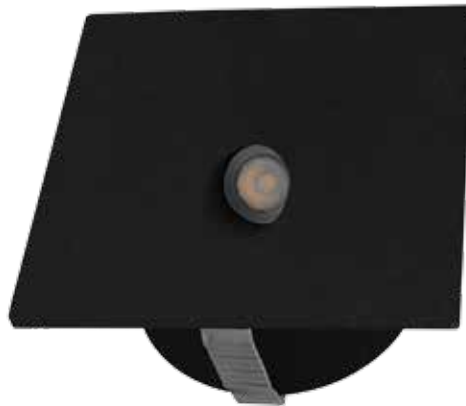

General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
3 Watt	110 lm	2700K 3000K 4000K 6000K	Asymmetric Downward 40°x30°	AC12V as Standard (DC12- 24V Optional)	Aluminium in Black Colour, or White or Polished Chrome, or Satin Nickel as Options	Aluminium

Dimension

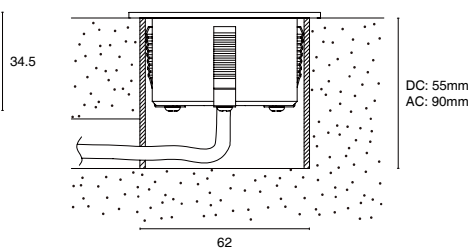

40°x30°



Accessories

Mounting Tube



Included





PLUTO 3BS

PL03BS


-  IP65
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  Net Weight 0.42kgs
-  PVC Cable 0.3M 2*20#
-  CREE XPE2 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
3 Watt	110 lm	2700K 3000K 4000K 6000K	Asymmetric Downward 40°x30°	AC12V as Standard (DC12- 24V Optional)	Aluminium in Black Colour, or White or Polished Chrome, or Satin Nickel as Options	Aluminium

Dimension

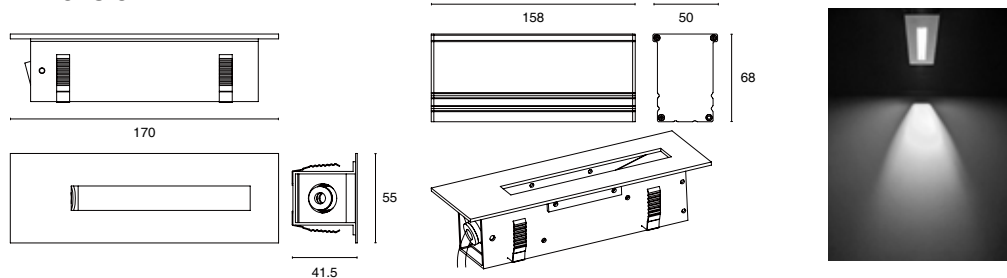

Accessories

Mounting Tube



Included

PLUTO 2S

PL02S


-  IP65
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  Net Weight 0.35kgs
-  PVC Cable 0.3M 2*20#
-  CREE XPE2 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
1 Watt	40 lm	2700K 3000K 4000K 6000K	Asymmetric Downward 40°x45°	AC12V as Standard (DC12- 24V Optional)	Aluminium in Black Colour, or White or Polished Chrome, or Satin Nickel as Options	Aluminium

Dimension

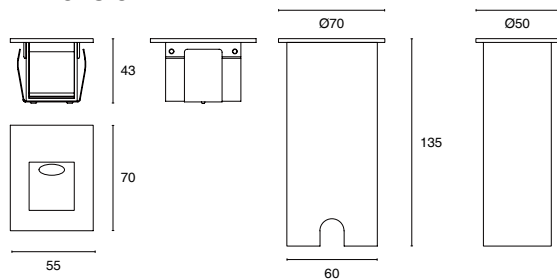

40°x30°

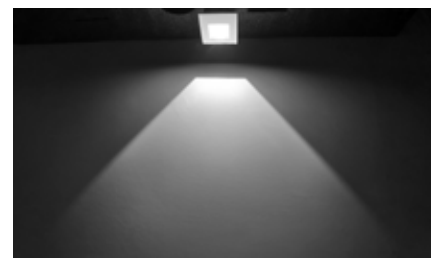

Accessories

Mounting Tube



Included





URANUS 3

UR03

-  IP65
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  Net Weight 0.32kgs
-  PVC Cable 0.3M 2*20#
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
3.5 Watt	350 lm	2700K 3000K 4000K 6000K	15°, 24°, 36°, 60°	AC12V as Standard (DC12- 24V Optional)	Aluminium	Aluminium in Dark Grey or Coffee Red, Black, White

Dimension

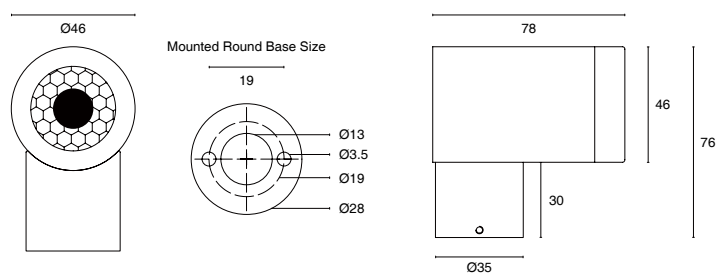

15°



Accessories

Mounting Base and Screws



Included

URANUS 7

UR07

-  IP65
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  Net Weight 0.45kgs
-  PVC Cable 0.3M 2*20#
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:




General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
7 Watt	800 lm	2700K 3000K 4000K 6000K	15°, 24°, 36°, 60°	AC12V as Standard (DC12- 24V Optional)	Aluminium	Aluminium in Dark Grey or Coffee Red, Black, White

Dimension

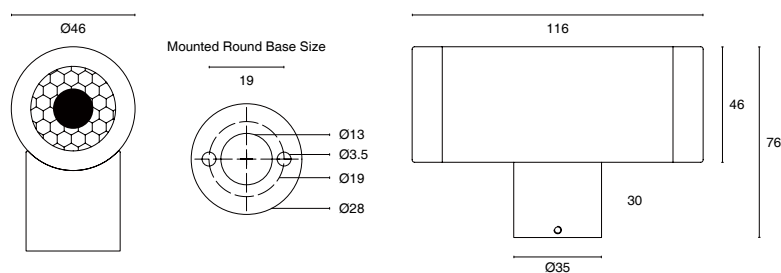

2x15°



Accessories

Mounting Base and Screws



Included

URANUS 9

UR09

-  IP65
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  Net Weight 0.56kgs
-  PVC Cable 0.3M 2*20#
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
9 Watt	750 lm	2700K 3000K 4000K 6000K	10°, 23°, 36°	AC12V as Standard (DC12- 24V Optional)	Aluminium	Aluminium in Dark Grey or Coffee Red, Black, White

Dimension



23°



Accessories

Mounting Base and Screws



Included

URANUS 18

UR18

-  IP65
-  IK06
-  Class III
-  CE Certification
-  ETL Certification
-  Net Weight 1.04kgs
-  PVC Cable 0.3M 2*20#
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:




General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
18 Watt	1500 lm	2700K 3000K 4000K 6000K	10°, 23°, 36°	AC12V as Standard (DC12- 24V Optional)	Aluminium	Aluminium in Dark Grey or Coffee Red, Black, White

Dimension

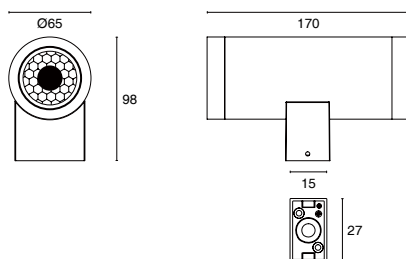

2x23°



Accessories

Mounting Base and Screws



Included





MOON SERIES

Products Features

These products are designed with sphere shape appearance for the whole garden lighting applications. They are with special design Tempered Glass and Aluminium trim, Aluminium housing, with passivated (anodizing) anti-corrosion + powder coated painting finishing for housing, optics PMMA Lens with wonderful light output, silicone gasket and Cable gland for waterproof IP65 or IP67 and high quality CREE LED.

This series are available in garden Pole light, garden spot light, wall light, underwater spot light, down light that are in same type sphere shape design.

Application

These lights are widely used in the garden application, such as the garden of the house, hotel, the park etc.



IP65 IP67 IP68 CE





MOON 5C

MN05C

-  IP65
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.5kgs
-  PVC Cable 1M 2*20#
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
4.5 Watt	300 lm Without Colour Filter	2700K 3000K 4000K 6000K	50°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Coffee Red as Standard or Dark Grey, Black, White

Dimension



50°




Accessories

Moon Spike-260



Included

7 Colour Filters as below, Red, Orange, Yellow, Green, Pink, Blue, Cyan

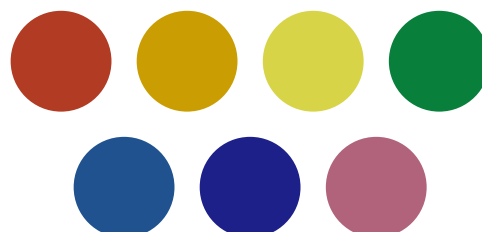

Price Including 1PC Colour Filter, Others Optional

MOON 8C

MN08C

-  IP65
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 1kgs
-  PVC Cable 1M 2*20#
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
8 Watt	450 lm Without Colour Filter	2700K 3000K 4000K 6000K	50°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Coffee Red as Standard or Dark Grey, Black, White

Dimension



50°




Accessories

Moon Spike-260





Included

7 Colour Filters as below, Red, Orange, Yellow, Green, Pink, Blue, Cyan

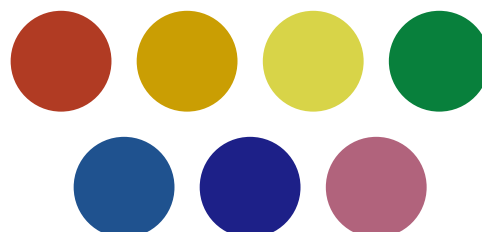

Price Including 1PC Colour Filter, Others Optional

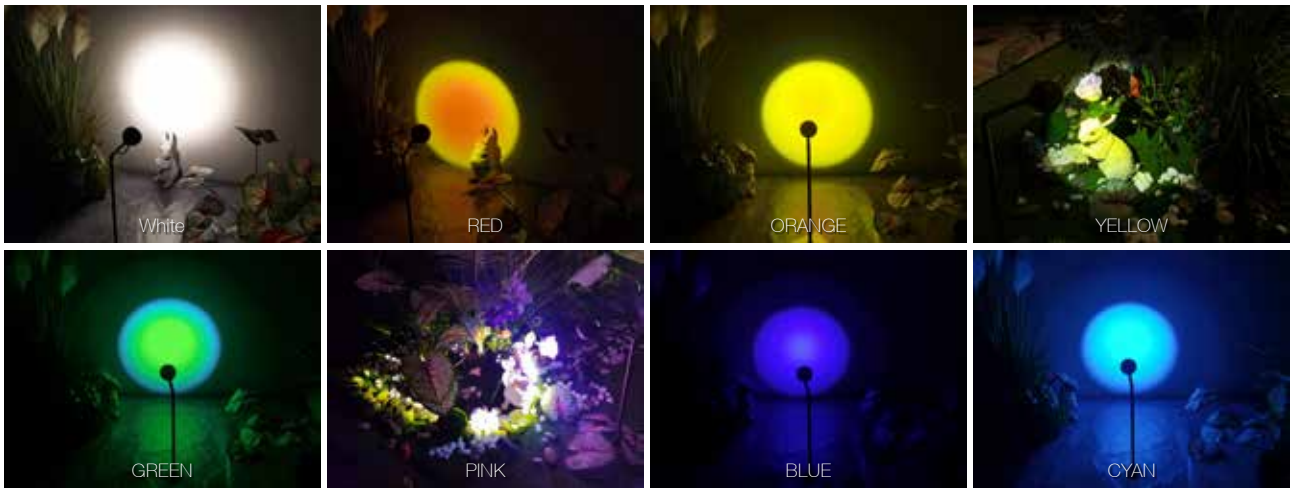

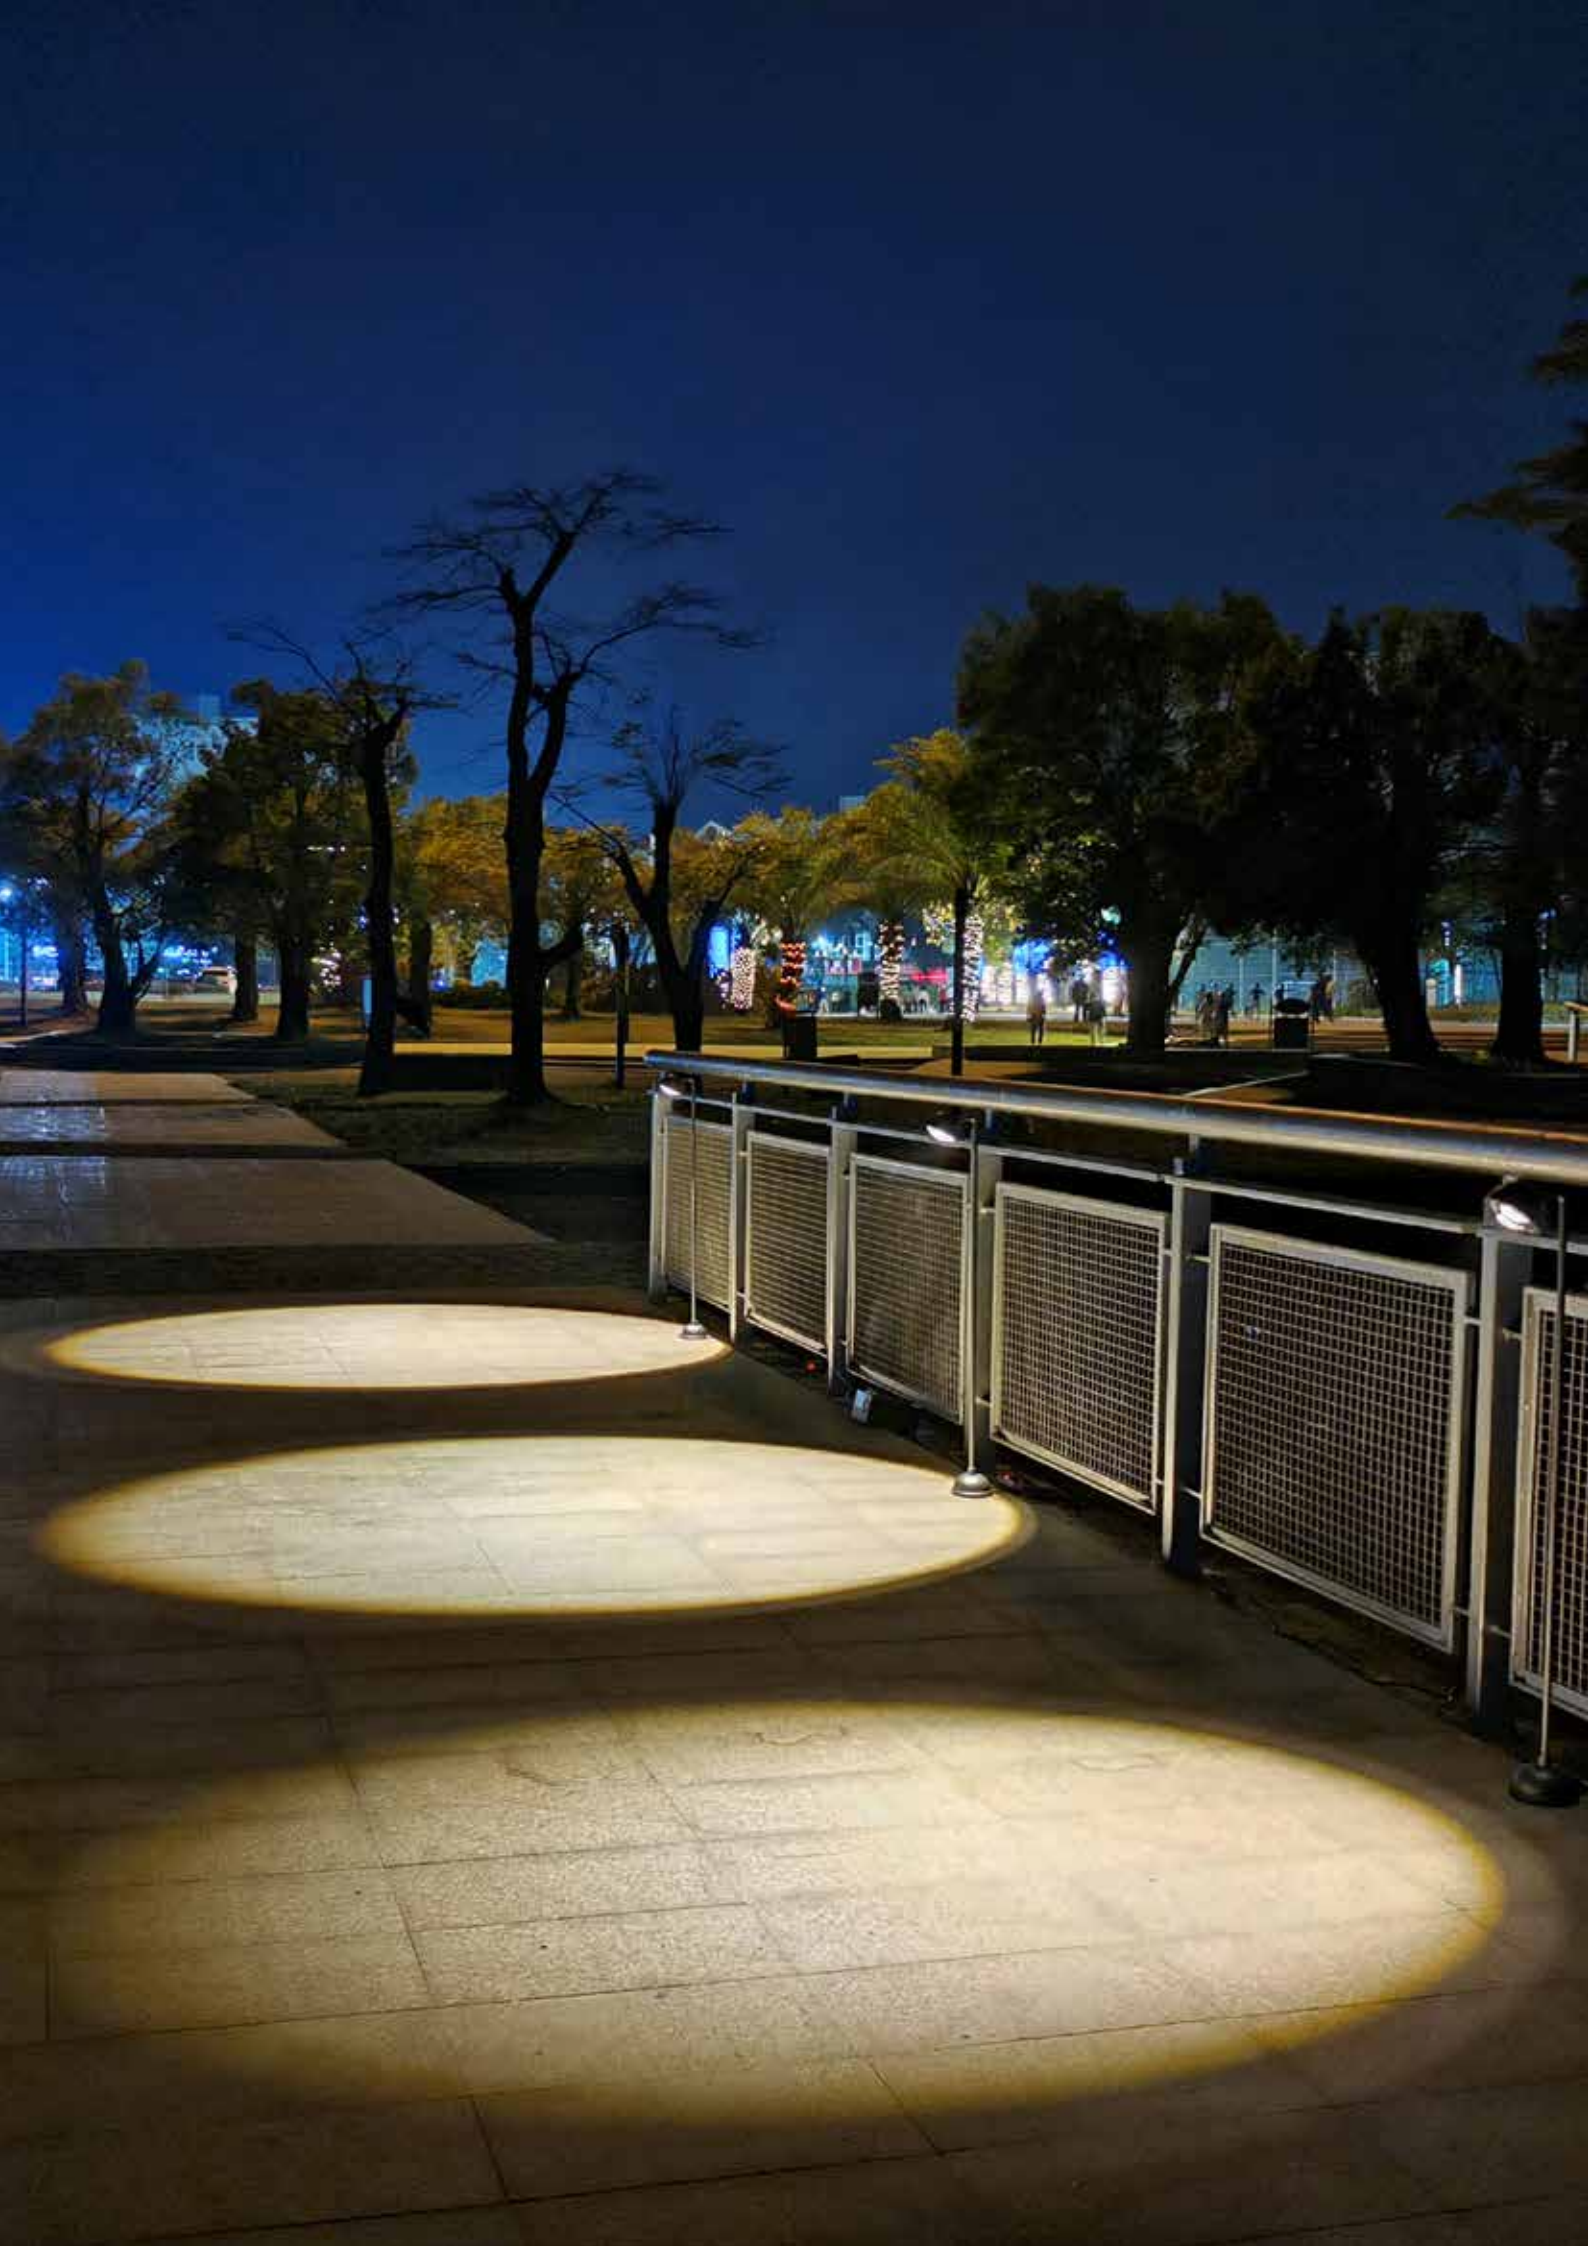

MOON 3P

MN03 POLE

-  IP65
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.35kgs with 500mm Pole and Spike
-  PVC Cable 1M 2*20#
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
3 Watt	240 lm	2700K 3000K 4000K 6000K	15°, 24°, 36°, 60°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Coffee Red as Standard or Dark Grey, Black, White

Dimension

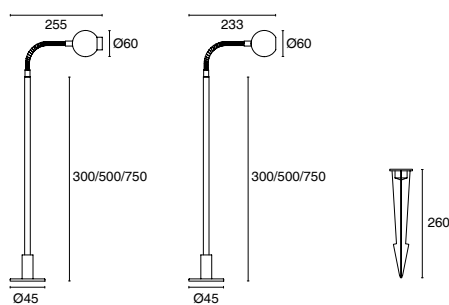

36°



Accessories

Moon Spike-260

Shield 03



Included

Optional



MOON 3SU

MN03 SUSPENDED

-  IP65
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.32kgs
-  PVC Cable 1M 2*20#
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty





Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
3 Watt	240 lm	2700K 3000K 4000K 6000K	15°, 24°, 36°, 60°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Coffee Red as Standard or Dark Grey, Black, White

Dimension



36°



Accessories

Suspended Part (Customers Need to Buy The Steel Rope at Local Market)

Shield 03



Included



Optional



MOON 8P

MN08 POLE

-  IP65
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.45kgs with 500mm Pole and Spike
-  PVC Cable 1M 2*20#
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
8 Watt	540 lm	2700K 3000K 4000K 6000K	10°, 15°, 24°, 36°, 60°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Coffee Red as Standard or Dark Grey, Black, White

Dimension

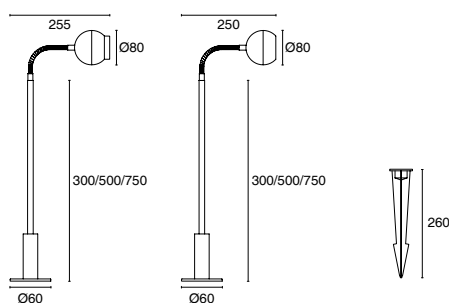

36°



Accessories

Moon Spike-260

Shield 03



Included

Optional

MOON 8SU

MN08 SUSPENDED

-  IP65
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.42kgs
-  PVC Cable 1M 2*20#
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
8 Watt	540 lm	2700K 3000K 4000K 6000K	10°, 15°, 24°, 36°, 60°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Coffee Red as Standard or Dark Grey, Black, White

Dimension

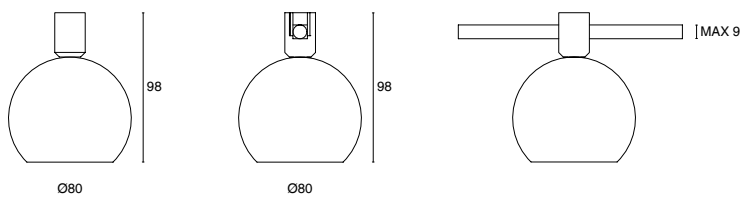

36°



Accessories

Suspended Part (Customers Need to Buy The Steel Rope at Local Market)

Shield 08



Included



Optional

MOON ZOOM8PF

MN08 ZOOM POLE

-  IP65
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.42kgs with 500mm Pole and Spike
-  PVC Cable 1M 2*20#
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
8 Watt	550 lm	2700K 3000K 4000K 6000K	Zoom 20° to 50°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Coffee Red as Standard or Dark Grey, Black, White

Dimension



20°



Accessories

Moon Spike-260



Included

Magnet for Zoom



Included

20° to 50°Zoomable



MOON ZOOM8SUF

MN08 ZOOM SUSPENDED

-  IP65
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.4kgs
-  PVC Cable 1M 2*20#
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
8 Watt	550 lm	2700K 3000K 4000K 6000K	Zoom 20° to 50°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Coffee Red as Standard or Dark Grey, Black, White

Dimension

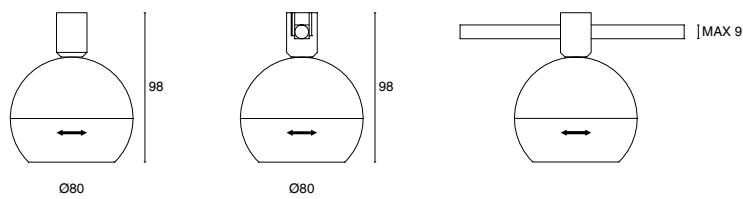

20°



Accessories

Suspended Part (Customers Need to Buy The Steel Rope at Local Market)

Magnet for Zoom



Included



Included



MOON 3B

MN03 BRACKET

-  IP67
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.3kgs
-  Rubber Cable 1M 2*0.824 mm2
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:




General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
3 Watt	240 lm	2700K 3000K 4000K 6000K	10°, 15°, 24°, 36°, 60°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Coffee Red as Standard or Dark Grey, Black, White

Dimension

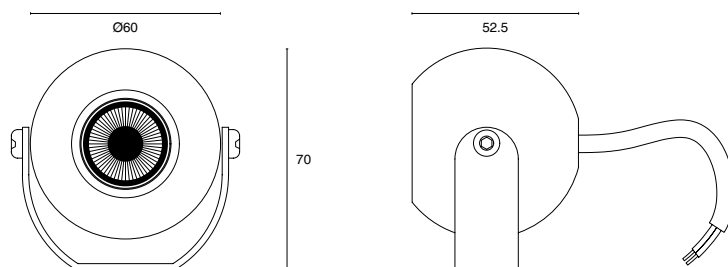

60°



Accessories

Spike-205



Optional

Round Base D80



Optional

Pole 300mm/500mm/750mm



Optional

8D Pole 300mm/500mm/750mm
with Spike or Round Base



Optional



MOON 8B

MN08 BRACKET

-  IP67
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 1kgs
-  Rubber Cable 1M 2*0.824 mm2
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:




General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
8 Watt	700 lm	2700K 3000K 4000K 6000K	12°, 24°, 38°, 45°, 60°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Coffee Red as Standard or Dark Grey, Black, White

Dimension

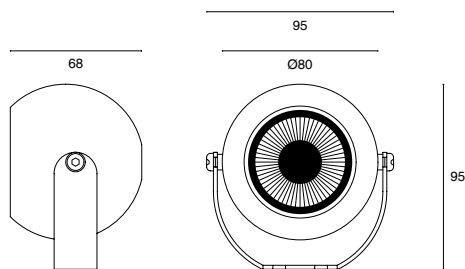

12°



Accessories

Spike-205



Optional

Round Base D80



Optional

Pole 300mm/500mm/750mm



Optional

8D Pole 300mm/500mm/750mm
with Spike or Round Base



Optional



MOON 15B

MN15 BRACKET

-  IP67
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 1.6kgs
-  Rubber Cable 1M 2*0.824 mm2
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty





Electrophoresis + Painted Available Colour for Housing:




General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
15 Watt	1200 lm	2700K 3000K 4000K 6000K	10°, 15°, 24°, 36°, 60°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Coffee Red as Standard or Dark Grey, Black, White

Dimension



12°



Accessories

Spike-205



Optional

Round Base D80



Optional

Pole 300mm/500mm/750mm



Optional

15DPole 300mm/500mm/750mm
with Spike or Round Base




Optional

POLE WITH BRACKETS FOR TWO SPOT LIGHTS




Electrophoresis + Painted Available Colour for Housing:

				
Matt Black No.7648	Dark Grey No.7678	Coffee Red No.949899	Matt White No.9003	Antique Brass

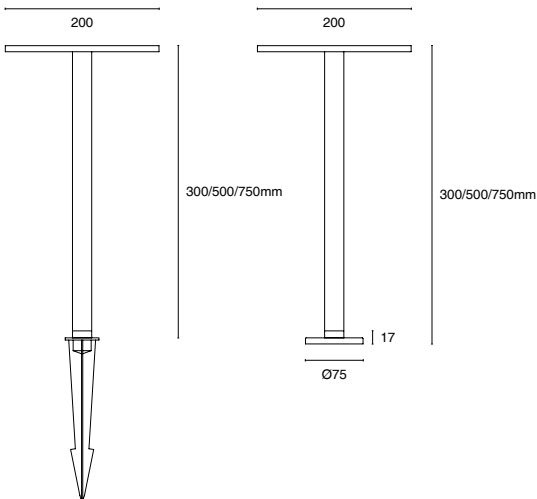

8D Pole WITH BRACKETS FOR TWO SPOT LIGHTS 3-8W

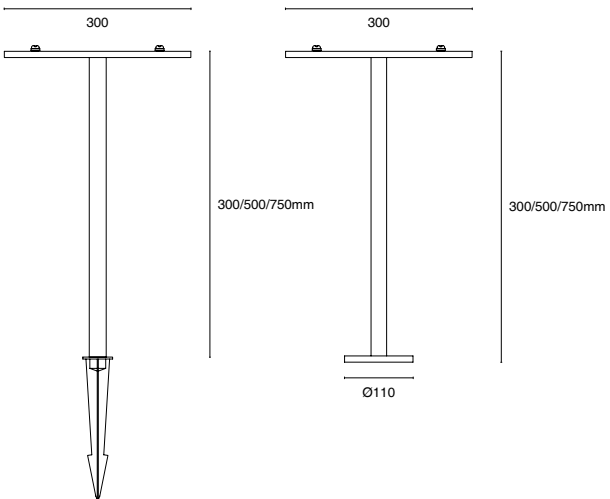

15DPOLE WITH BRACKETS FOR TWO SPOT LIGHTS 15W





MOON 3U
MN03 UNDERWATER

-  IP68
-  IK04
-  Class III
-  CE Certification
-  Net Weight 0.8kgs
-  Rubber Cable 2M 2*0.824 mm2
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty






Use Only in Permanent Immersion in Water as to Avoid Damaging to LED!

• **General Data**

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
3 Watt	240 lm	2700K 3000K 4000K 6000K	10°, 15°, 24°, 36°, 60°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Stainless Steel 316L	Stainless Steel 316L

• **Dimension**

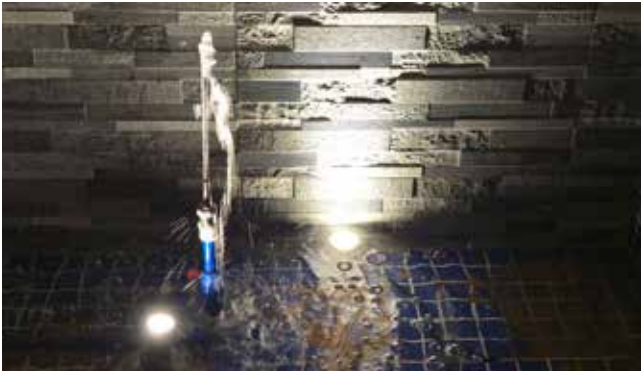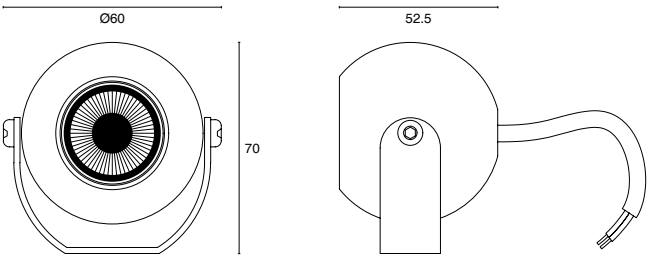

MOON 8U
MN08 UNDERWATER

-  IP68
-  IK04
-  Class III
-  CE Certification
-  Net Weight 1.6kgs
-  Rubber Cable 2M 2*0.824 mm2
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty





Use Only in Permanent Immersion in Water as to Avoid Damaging to LED!

• **General Data**

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
8 Watt	700 lm	2700K 3000K 4000K 6000K	12°, 24°, 38°, 45°, 60°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Stainless Steel 316L	Stainless Steel 316L

• **Dimension**

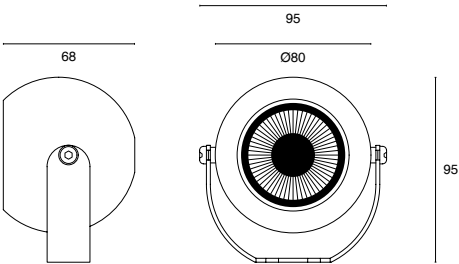





MOON 6W

MN06W

-  IP65
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.35kgs
-  PVC Cable 0.3M 2*20#
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:




General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
6 Watt	430 lm	2700K 3000K 4000K 6000K	10°, 15°, 24°, 36°, 60°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Coffee Red as Standard or Dark Grey, Black, White

Dimension

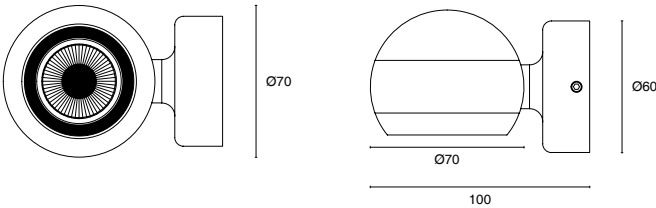

36°



Accessories

Mounting Base



Included

MOON 6WD

MN06WD

-  IP65
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.34kgs
-  PVC Cable 0.3M 2*20#
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:




General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
6 Watt	580 lm	2700K 3000K 4000K 6000K	10°, 15°, 24°, 36°, 60°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Coffee Red as Standard or Dark Grey, Black, White

Dimension

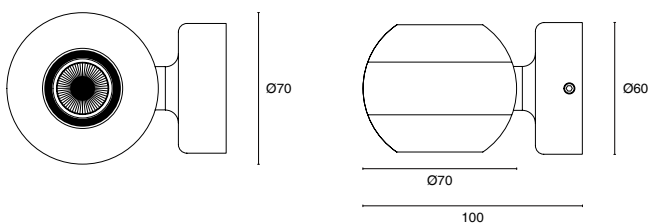

2x60°



Accessories

Mounting Base



Included

MOON 10W

MN10W

-  IP65
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.63kgs
-  Rubber Cable 0.3M 2*0.824 mm2
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:




• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
10 Watt	730 lm	2700K 3000K 4000K 6000K	10°, 15°, 24°, 36°, 60°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Coffee Red as Standard or Dark Grey, Black, White

• Dimension

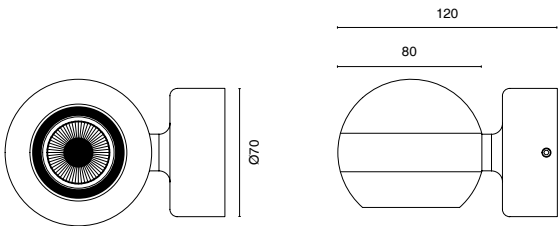

1x36°



• Accessories

Mounting Base



Included

MOON 10WD

MN10WD

-  IP65
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.6kgs
-  Rubber Cable 0.3M 2*0.824 mm2
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Electrophoresis + Painted Available Colour for Housing:




• **General Data**

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
10 Watt	1000 lm	2700K 3000K 4000K 6000K	10°, 15°, 24°, 36°, 60°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Coffee Red as Standard or Dark Grey, Black, White

• **Dimension**

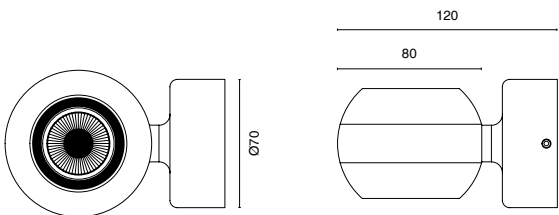

2x60°



• **Accessories**

Mounting Base



Included





MOON ZOOM8DL

MN08 ZOOM CEILING

-  IP65
-  IK04
-  Class III
-  CE Certification
-  ETL Certification
-  SALT SPRAY TESTED (Over 1000 Hours)
-  Net Weight 0.4kgs
-  Rubber Cable 0.3M 2*0.824 mm2
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty





Electrophoresis + Painted Available Colour for Housing:



• **General Data**

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
8 Watt	550 lm	2700K 3000K 4000K 6000K	Zoom 20° to 50°	AC12V as Standard (AC100-245V 50/60Hz Optional)	Aluminium	Aluminium in Coffee Red as Standard or Dark Grey, Black, White

• **Dimension**



• **Accessories**

Mounting Base

Magnet for Zoom



Included

Included

20° to 50° Zoomable

20° Narrow Beam



50° Wide Beam







UNDERWATER LIGHTS SERIES

Products Features

These products are designed with Stainless Steel 316L trim, Stainless Steel 316L housing for underwater anti-corrosion, optics PMMA Lens with wonderful light output, Tempered Glass for high loading capacity, silicone gasket and Cable gland for waterproof IP67 and high quality CREE LED, OSRAM LED. We also use the nylon materials mounting sleeve so that it can be strong enough for recessing in the wall of the pool. We design the underwater lights for recessed installation for pool, standing surface mounted for fountain.

Application

These lights are widely used in the underwater application, such as the pool, the fountain etc.



IP68

CE





MERCURY 1

ME01

-  IP68
-  IK06
-  Class III
-  CE Certification
-  Net Weight 0.465kgs
-  Rubber Cable 2M 2*0.824 mm2
-  CREE XPE2 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Use Only in Permanent Immersion in Water as to Avoid Damaging to LED!

• **General Data**

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
1.2 Watt	90 lm	2700K 3000K 4000K 6000K	15°, 25°, 38°, 45°, 60°, 100°	DC12V-DC24V	Stainless Steel 316L	Stainless Steel 316L

• **Dimension**

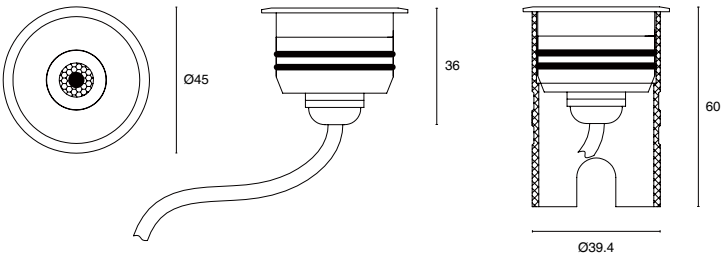

25°



• **Accessories**

Mounting Sleeve



Included

MERCURY 5

ME05

-  IP68
-  IK09
-  Class III
-  CE Certification
-  Net Weight 1kgs
-  Rubber Cable 2M 2*0.824 mm2
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Use Only in Permanent Immersion in Water as to Avoid Damaging to LED!

General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
5 Watt	330 lm	2700K 3000K 4000K 6000K	25°, 40°	AC12V as Standard (DC12V or DC24V Optional)	Stainless Steel 316L	Stainless Steel 316L

Dimension

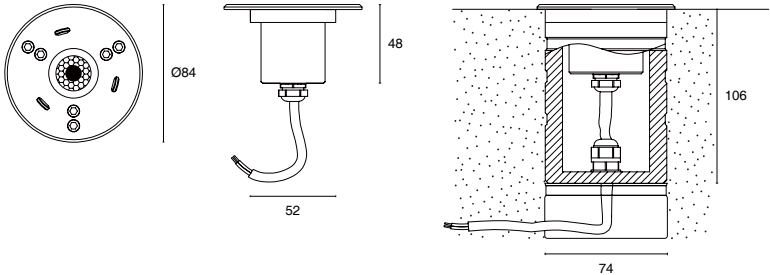

25°



Accessories

Mounting Box



Included





MERCURY 7 ME07

-  IP68
-  IK09
-  Class III
-  CE Certification
-  Net Weight 1kgs
-  Rubber Cable 2M 2*0.824 mm2
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Use Only in Permanent Immersion in Water as to Avoid Damaging to LED!
With Temperature Protection Switch Design. The Lamp Will be OFF When it's 65° Inside,
And Back to be ON When it's Cool Down to be 45°.

• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
7 Watt	560 lm	2700K 3000K 4000K 6000K	25°, 40°	AC12V as Standard (DC12V or DC24V Optional)	Stainless Steel 316L	Stainless Steel 316L

• Dimension

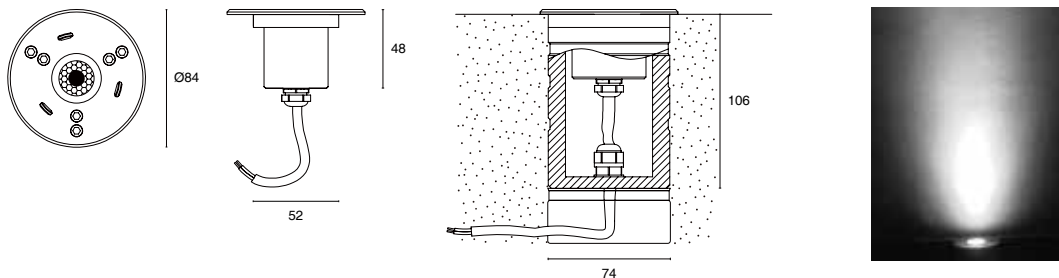

• Accessories

Mounting Box



Included

MERCURY 9RGB

ME09RGB

-  IP68
-  IK09
-  Class III
-  CE Certification
-  Net Weight 1.1kgs
-  Rubber Cable 2M 4*0.5 mm2
-  5050 RGB 3in1 LED
-  5 Years Warranty




Use Only in Permanent Immersion in Water as to Avoid Damaging to LED!

• **General Data**

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
9 Watt	540 lm (All LEDs on)	RGB	25°, 40°	DC12V	Stainless Steel 316L	Stainless Steel 316L

• **Dimension**

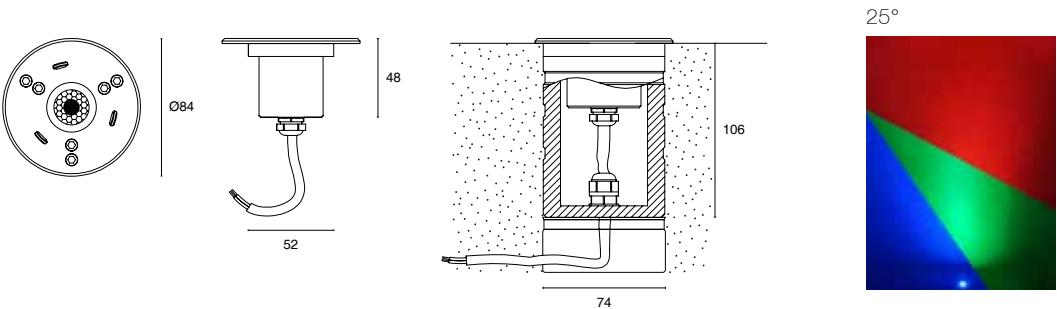

• **Accessories**

Mounting Box



Included





MERCURY 12

ME12

-  IP68
-  IK09
-  Class III
-  CE Certification
-  Net Weight 2.35kgs
-  Rubber Cable 2M 2*0.824 mm2
-  CREE XPG3 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Use Only in Permanent Immersion in Water as to Avoid Damaging to LED!
With Temperature Protection Switch Design. The Lamp Will be OFF When it's 65° Inside,
And Back to be ON When it's Cool Down to be 45°.

General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
12 Watt	900 lm	2700K 3000K 4000K 6000K	10°, 23°, 36°	AC12V as Standard (DC12V or DC24V Optional)	Stainless Steel 316L	Stainless Steel 316L

Dimension

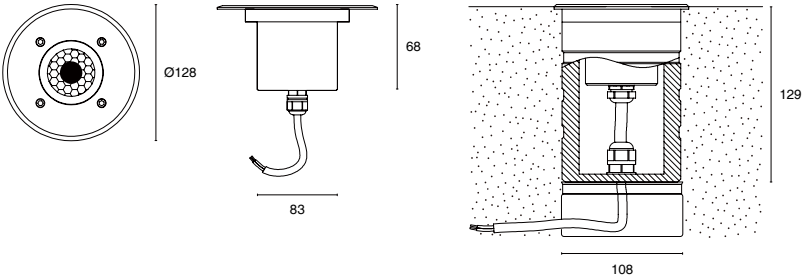

36°



Accessories

Mounting Box



Included

MERCURY 18

ME18

-  IP68
-  IK09
-  Class III
-  CE Certification
-  Net Weight 2.35kgs
-  Rubber Cable 2M 2*0.824 mm2
-  CREE XPG4 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Use Only in Permanent Immersion in Water as to Avoid Damaging to LED!
With Temperature Protection Switch Design. The Lamp Will be OFF When it's 65° Inside,
And Back to be ON When it's Cool Down to be 45°.

• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
18 Watt	1500 lm	2700K 3000K 4000K 6000K	10°, 23°, 36°	AC12V as Standard (DC12V or DC24V Optional)	Stainless Steel 316L	Stainless Steel 316L

• Dimension

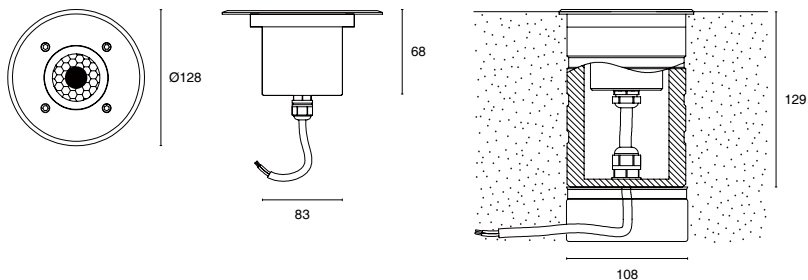

36°



• Accessories

Mounting Box



Included





MERCURY 18RGB

ME18RGB

-  IP68
-  IK09
-  Class III
-  CE Certification
-  Net Weight 2.4kgs
-  Rubber Cable 2M 4*0.75 mm2
-  RGB 3in1 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Use Only in Permanent Immersion in Water as to Avoid Damaging to LED!

• **General Data**

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
18 Watt	800 lm (All LEDs on)	RGB	30°	DC12V	Stainless Steel 316L	Stainless Steel 316L

• **Dimension**

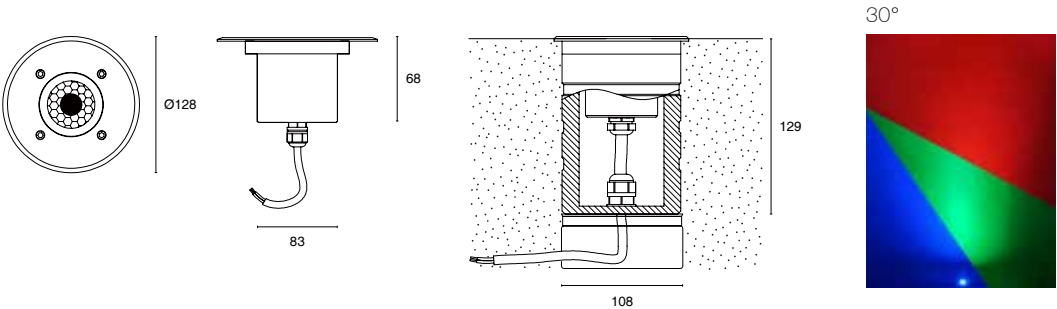

• **Accessories**

Mounting Box



Included

MERCURY 18RGBW

ME18RGBW

-  IP68
-  IK09
-  Class III
-  CE Certification
-  Net Weight 2.4kgs
-  Rubber Cable 2M 5*0.5 mm2
-  OSRAM RGBW 4in1 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Use Only in Permanent Immersion in Water as to Avoid Damaging to LED!

• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
18 Watt	1080 lm (All LEDs on)	RGBW	30°	DC12V	Stainless Steel 316L	Stainless Steel 316L

• Dimension

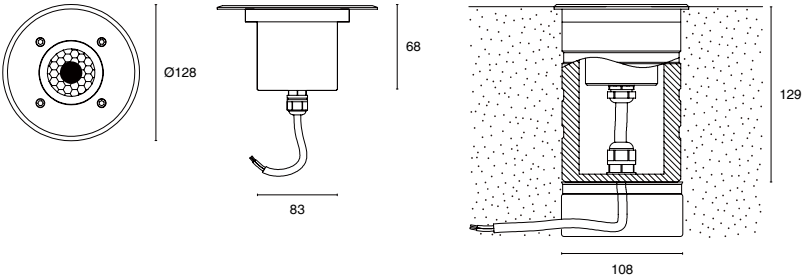

30°



• Accessories

Mounting Box



Included





NEPTUNE 3
NE03

-  IP68
-  IK04
-  Class III
-  CE Certification
-  Net Weight 0.3kgs
-  Rubber Cable 1M 2*0.824 mm2
-  CREE XPE2 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Use Only in Permanent Immersion in Water as to Avoid Damaging to LED!

• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
3 Watt	130 lm	2700K 3000K 4000K 6000K	10°, 15°, 30°, 45°, 60°	DC12V	Stainless Steel 316L	Stainless Steel 316L

• Dimension

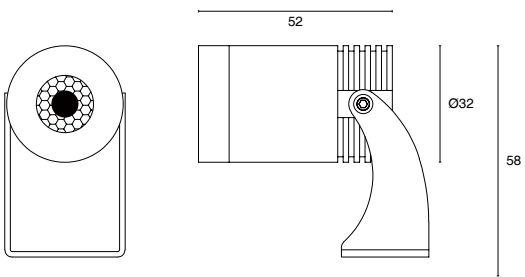

45°



NEPTUNE 3RGBW
NE03RGBW

-  IP68
-  IK04
-  Class III
-  CE Certification
-  Net Weight 0.35kgs
-  Rubber Cable 1M 5*0.5 mm2
-  RGBW 3030 LED
-  SDCM<5 for W
-  Ra ≥ 80 for W
-  5 Years Warranty




Use Only in Permanent Immersion in Water as to Avoid Damaging to LED!

• **General Data**

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
3 Watt	30 lm All LEDs on	RGBW3000K RGBW4000K RGBW5500K	30° Lens + Frosted Glass	DC12V	Stainless Steel 316L	Stainless Steel 316L

• **Dimension**

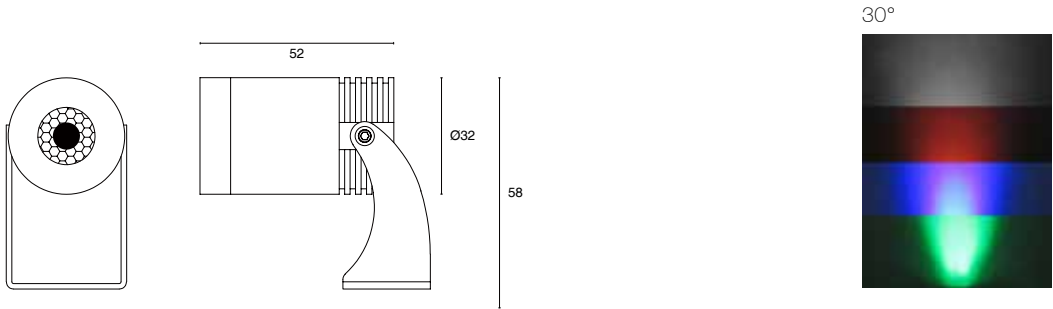





NEPTUNE 8
NE08

-  IP68
-  IK04
-  Class III
-  CE Certification
-  Net Weight 0.7kgs
-  Rubber Cable 1M 2*0.824 mm2
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty




Use Only in Permanent Immersion in Water as to Avoid Damaging to LED!

• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
8 Watt	550 lm	2700K 3000K 4000K 6000K	15°, 24°, 36°, 60°	AC12V as Standard (DC12V or DC24V Optional)	Stainless Steel 316L	Stainless Steel 316L

• Dimension

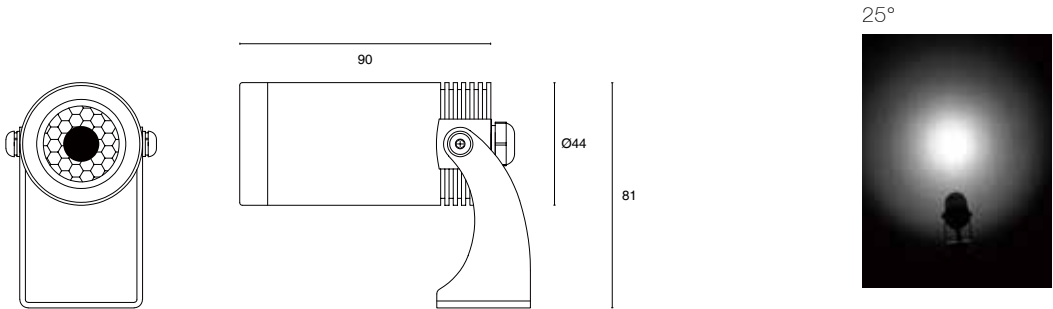

NEPTUNE 8RGBW
NE08RGBW

-  IP68
-  IK04
-  Class III
-  CE Certification
-  Net Weight 0.75kgs
-  Rubber Cable 1M 5*0.5 mm2
-  RGBW 3030 LED
-  SDCM<5 for W
-  Ra ≥ 80 for W
-  5 Years Warranty




Use Only in Permanent Immersion in Water as to Avoid Damaging to LED!

• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
8 Watt	240 lm All LEDs on	RGBW3000K RGBW4000K RGBW5500K	15°, 24°, 36°, 60°	DC12V	Stainless Steel 316L	Stainless Steel 316L

• Dimension

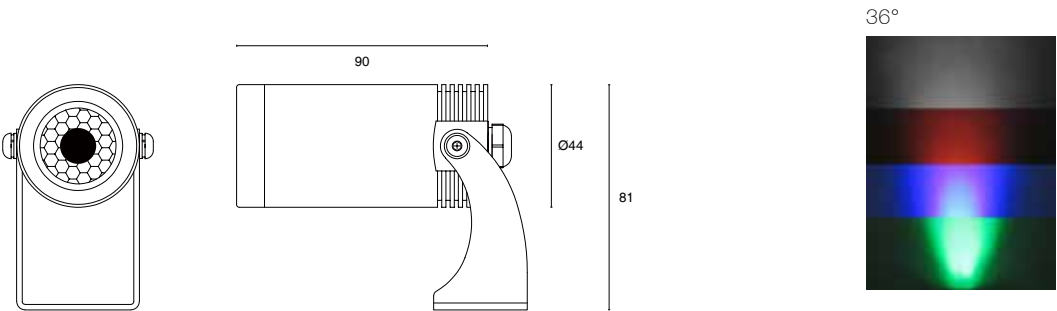





NEPTUNE 15

NE15

-  IP68
-  IK04
-  Class III
-  CE Certification
-  Net Weight 1.1kgs
-  Rubber Cable 1M 2*0.824 mm2
-  CREE COB LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty





Use Only in Permanent Immersion in Water as to Avoid Damaging to LED!

• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
15 Watt	1050 lm	2700K 3000K 4000K 6000K	10°, 23°, 36°	AC12V as Standard (DC12V or DC24V Optional)	Stainless Steel 316L	Stainless Steel 316L

• Dimension

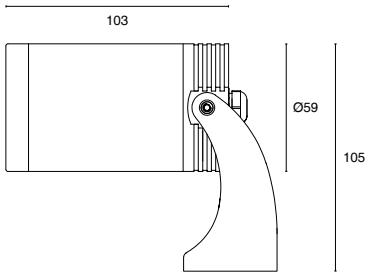

36°



NEPTUNE 15RGBW
NE15RGBW

-  IP68
-  IK04
-  Class III
-  CE Certification
-  Net Weight 1.15kgs
-  Rubber Cable 1M 5*0.5 mm2
-  RGBW 3030 LED
-  SDCM<5 for W
-  Ra ≥ 80 for W
-  5 Years Warranty




Use Only in Permanent Immersion in Water as to Avoid Damaging to LED!

• General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
15 Watt	450 lm All LEDs on	RGBW3000K RGBW4000K RGBW5500K	10°, 23°, 36°	DC12V	Stainless Steel 316L	Stainless Steel 316L

• Dimension

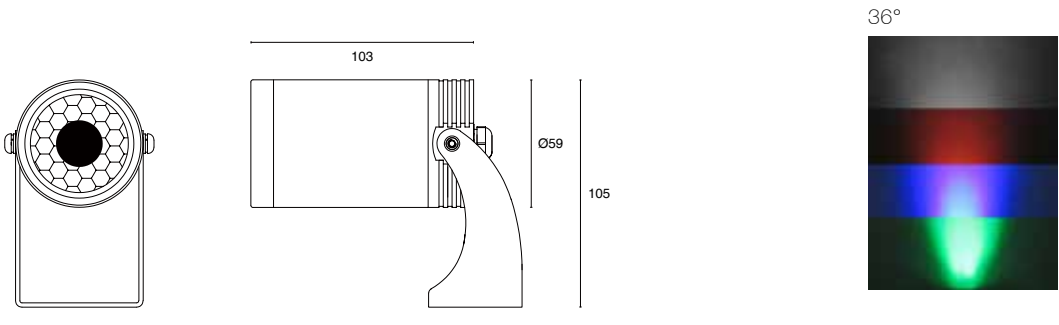






LED WALL WASHER LIGHT SERIES

Products Features


These products are designed with stretched Aluminium / solid Aluminium, with Passivated (Anodizing) anti-corrosion finishing for housing in black color or grey color, optics PMMA Lens with wonderful light output, Tempered Glass for high loading capacity, silicone gasket and Cable gland for waterproof IP68 or IP65 and high quality OSRAM LED. These products are with CE, ETL Certifications.

Application

These lights are widely used in the exterior application, such as lighting walls, architectural features, landscape features for the hotel, the garden, the park, the building etc.

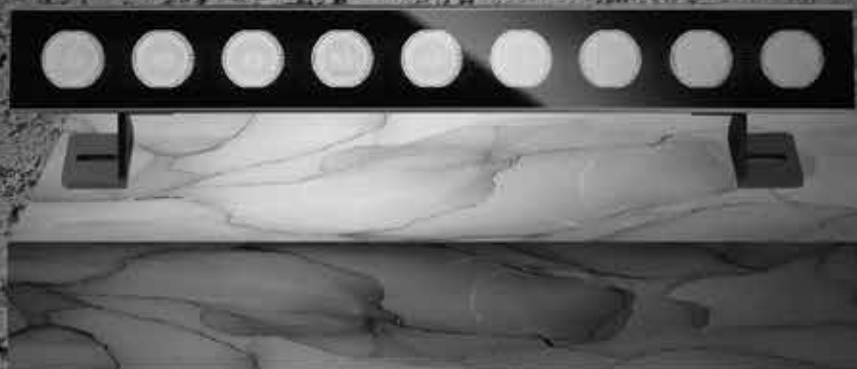


IP65 IP68 CE ETL Intertek

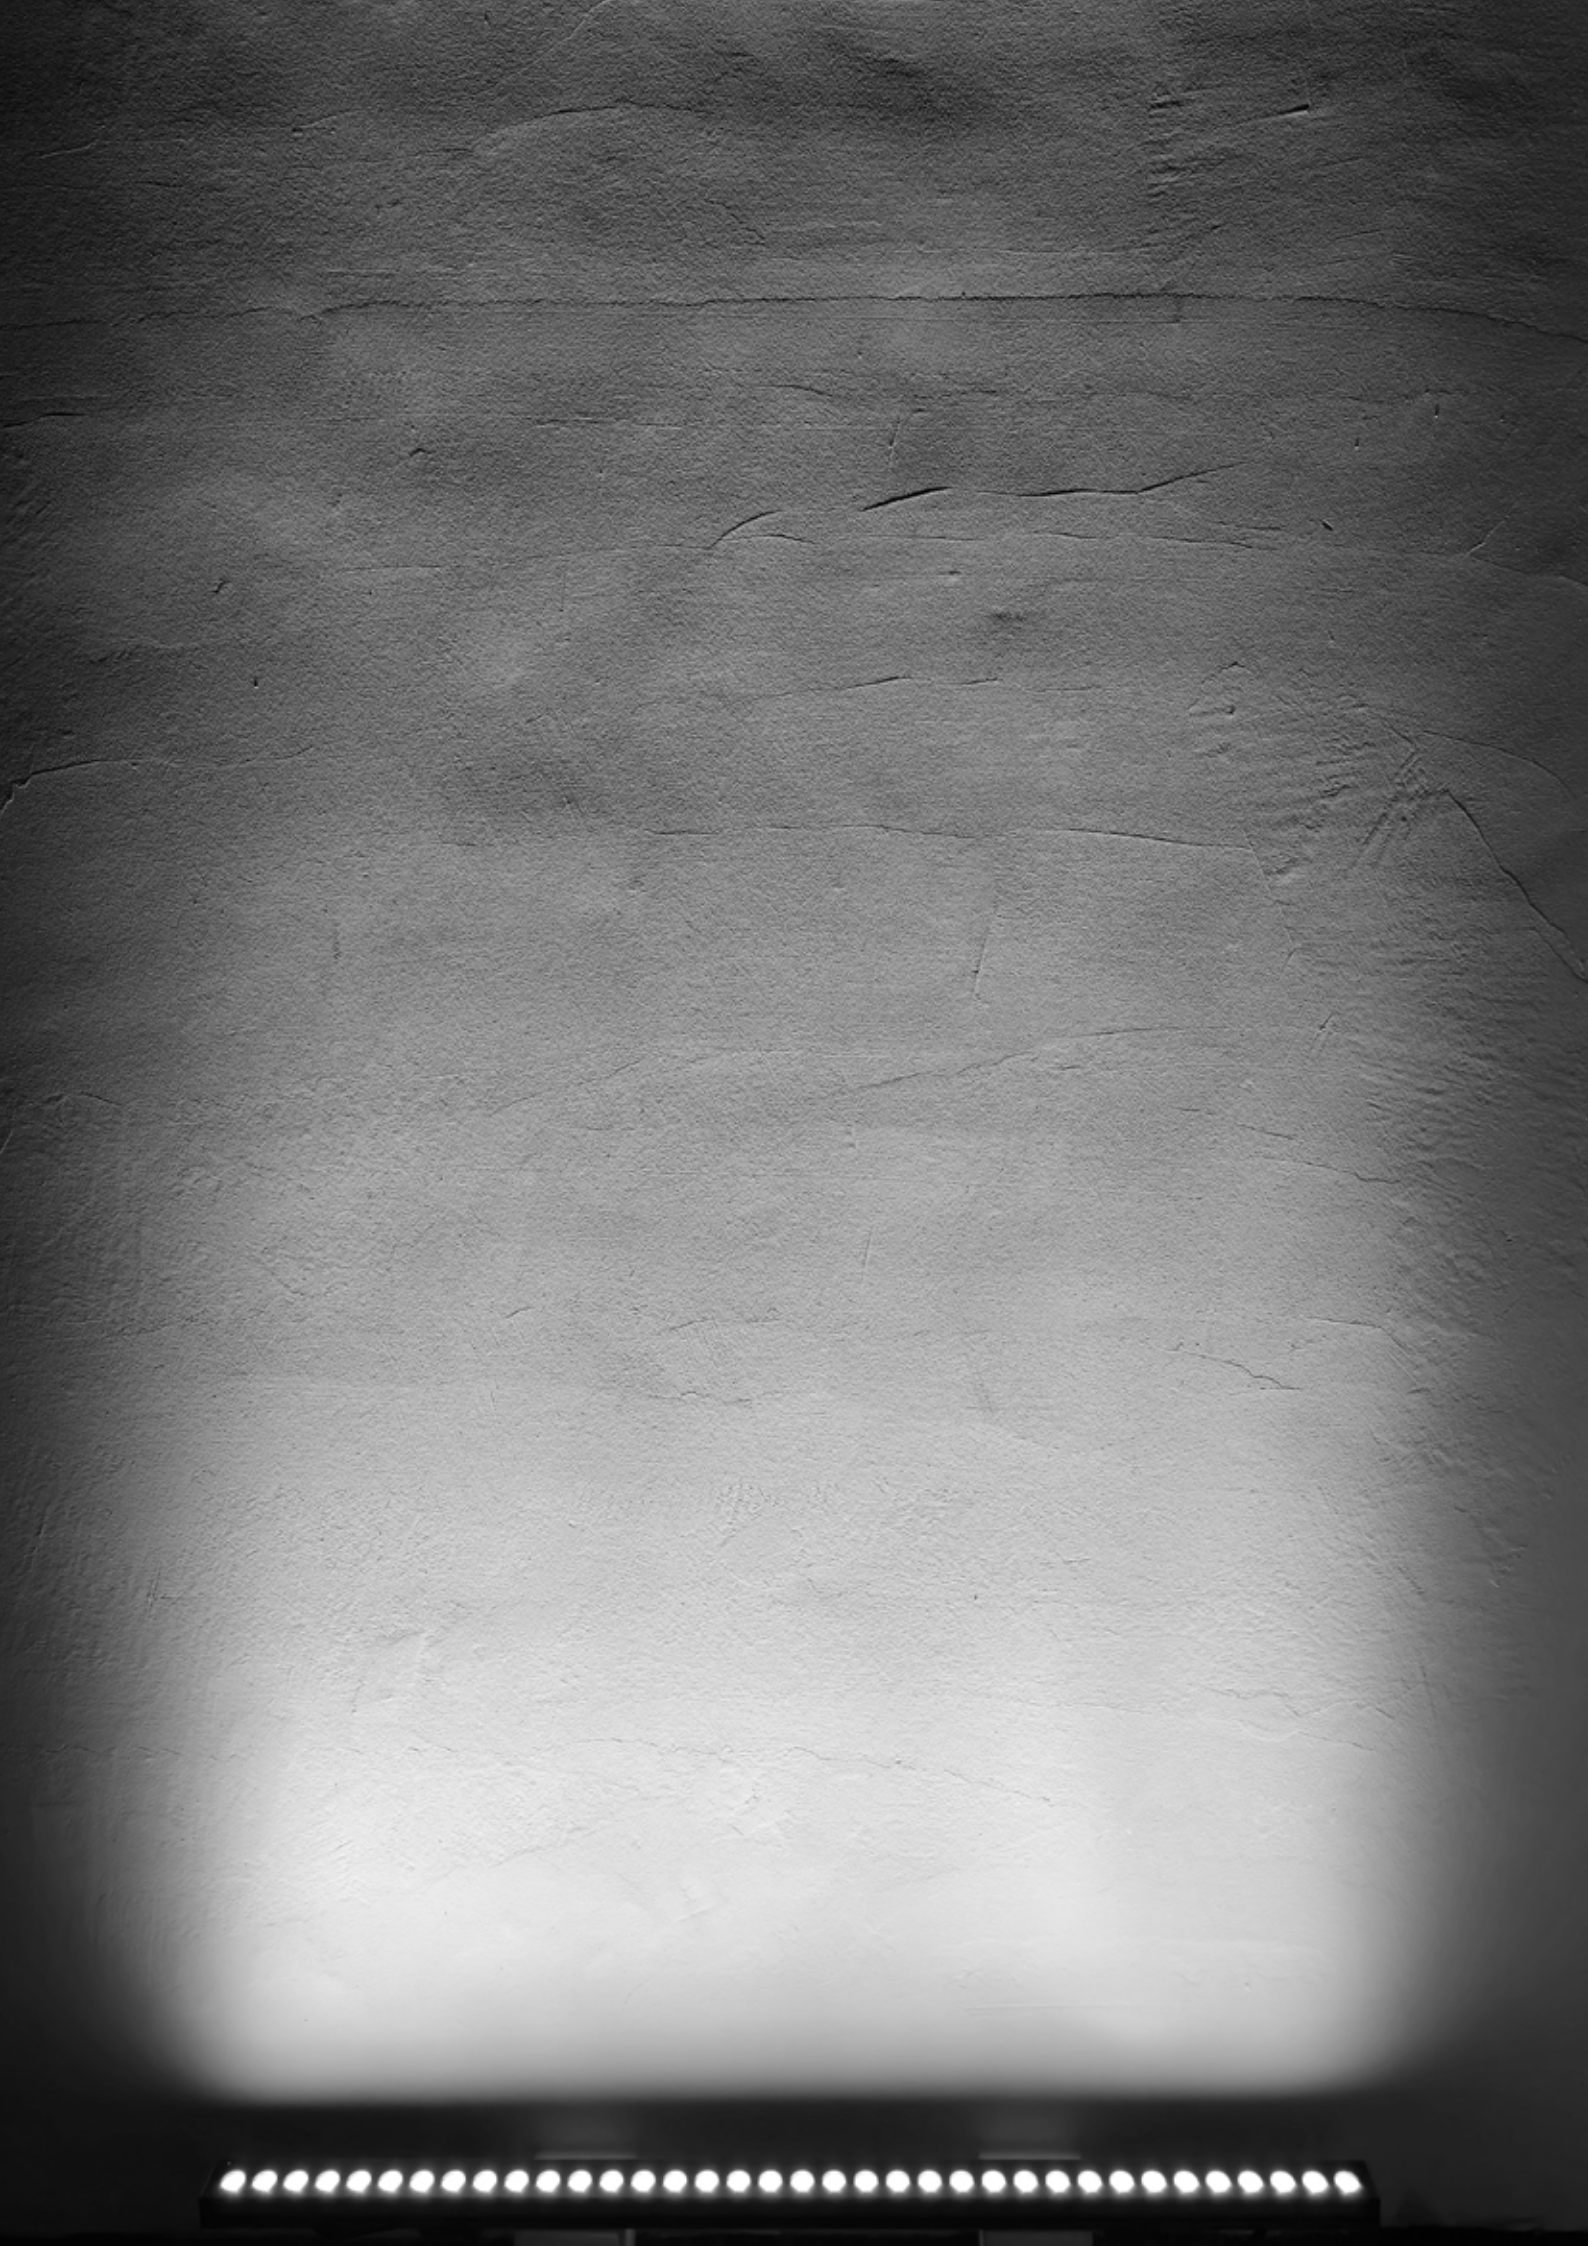

CARINA 48-500

CA48500



-  IP68
-  IK04
-  Class III
-  CE Certification
-  Net Weight 1.92kgs
-  Rubber Cable 2 PCS 50CM 2*1.5mm2
-  CREE XPG LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty

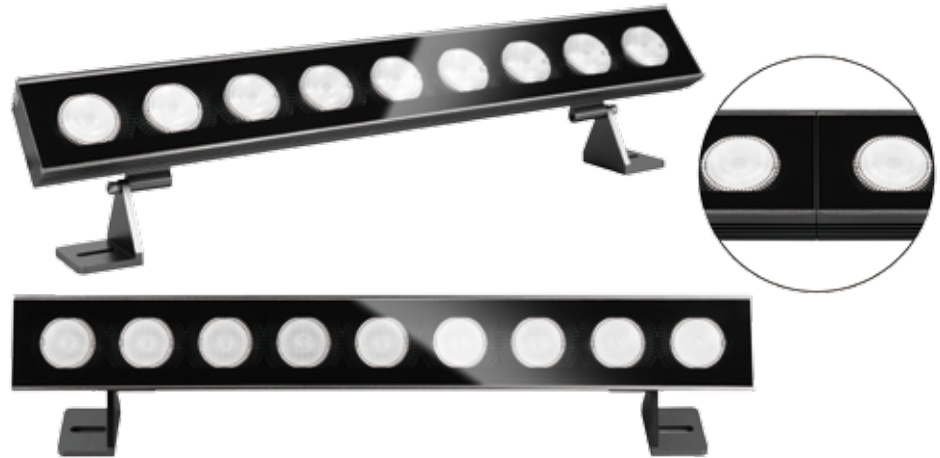

General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
48 Watt	1920 lm	2700K 3000K 4000K 6000K	5°, 8°, 12°, 24°, 36°, 60°, 10*30°	DC12V or DC24V	Aluminium + Tempered Glass	Aluminium in Dark Grey

Dimension

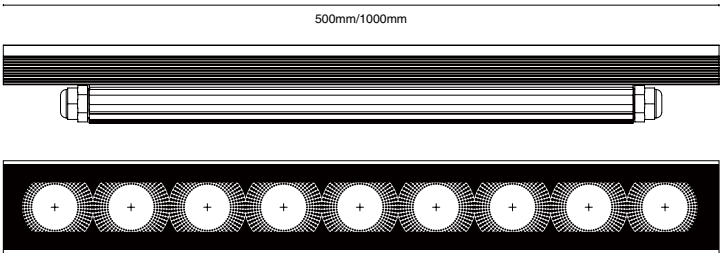

10*30°



Accessories

IP68 | Tube Connector




Included

CARINA 96-1000

CA961000



-  IP68
-  IK04
-  Class III
-  CE Certification
-  Net Weight 4kgs
-  Rubber Cable 2 PCS 50CM 2*1.5mm2
-  CREE XPG LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty

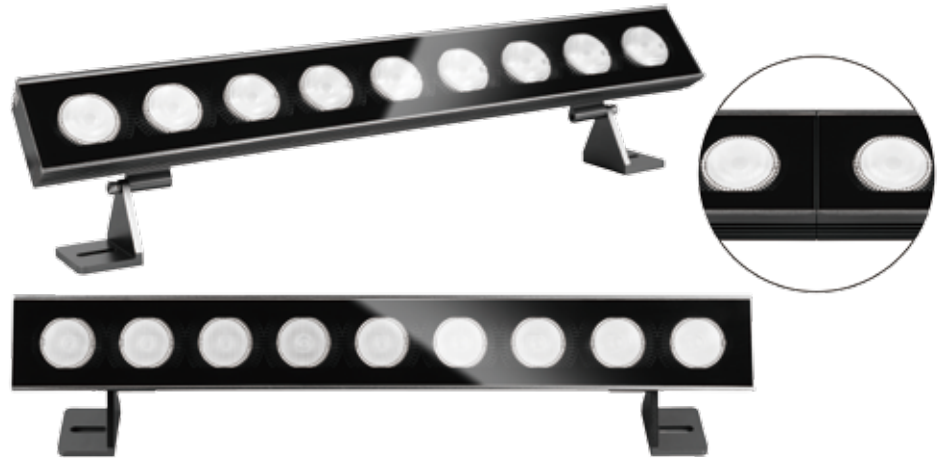

General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
96 Watt	3840 lm	2700K 3000K 4000K 6000K	5°, 8°, 12°, 24°, 36°, 60°, 10*30°	DC12V or DC24V	Aluminium + Tempered Glass	Aluminium in Dark Grey

Dimension

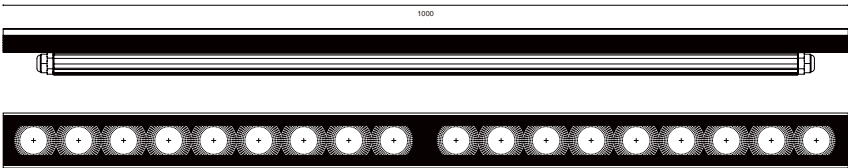

10*30°



Accessories

IP68 | Tube Connector



Included






CARINA 18-500RGBW

CA18500RGBW



-  IP68
-  IK04
-  Class III
-  CE Certification
-  Net Weight 2kgs
-  Rubber Cable 1M 5*0.5mm2
-  4in1 RGBW 3030SMD LED
-  SDCM<5 for W
-  Ra ≥ 80 for W
-  5 Years Warranty

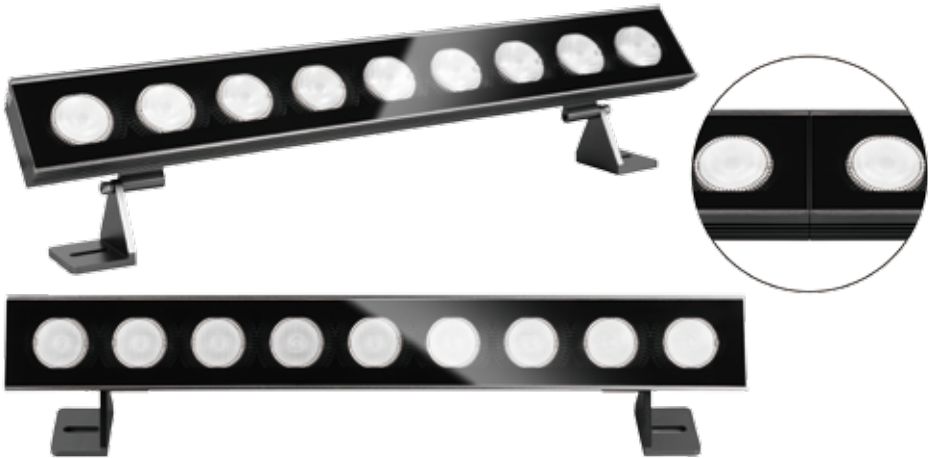

General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
18 Watt	720 lm	RGBW5500K	5°, 8°, 12°, 24°, 36°, 60°, 10°30°	DC12V	Aluminium + Tempered Glass	Aluminium in Dark Grey

Dimension

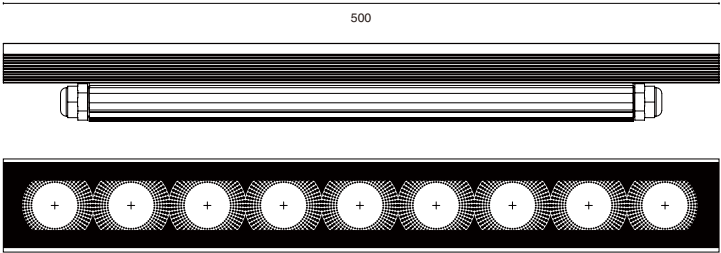

10°30°



Accessories

IP68 | Tube Connector




Included

CARINA 36-1000RGBW

CA361000RGBW



-  IP68
-  IK04
-  Class III
-  CE Certification
-  Net Weight 4kgs
-  Rubber Cable 1M 5*0.5mm2
-  4in1 RGBW 3030SMD LED
-  SDCM<5 for W
-  Ra ≥ 80 for W
-  5 Years Warranty

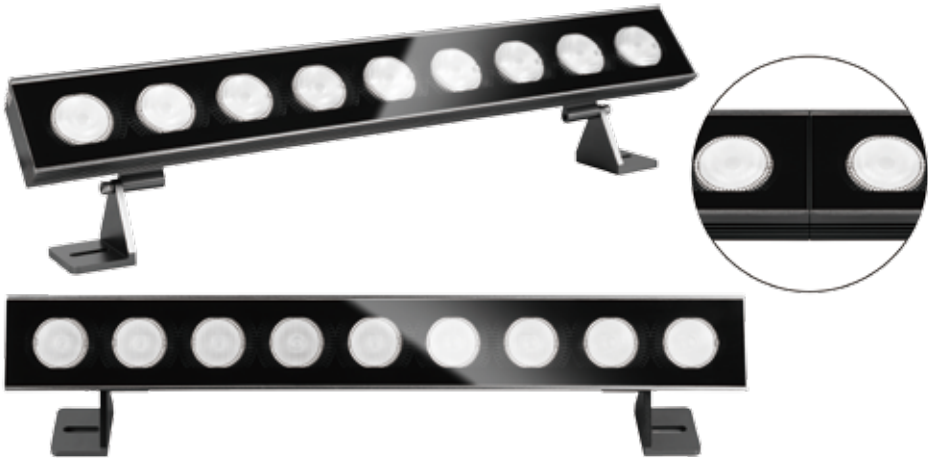

• **General Data**

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
36 Watt	1440 lm	RGBW5500K	5°, 8°, 12°, 24°, 36°, 60°, 10°30°	DC12V	Aluminium + Tempered Glass	Aluminium in Dark Grey

• **Dimension**

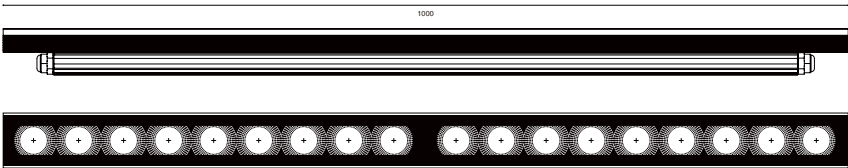

• **Accessories**







VEGA 36-1000

VG361000


-  IP65
-  IK04
-  Class III
-  CE Certification
-  Net Weight 1.75kgs
-  2 PCS Rubber Cables with Waterproof Connectors, One Side Male, Another Side Female
-  RGB 3in1 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
36 Watt	2700 lm	2700K 3000K 4000K 6000K	12° / 24° / 30° / 40° / 60° / Oval Lens 15*40°	DC24V (AC100- 245V as Options)	Aluminium + Tempered Glass	Aluminium in Dark Grey

Dimension

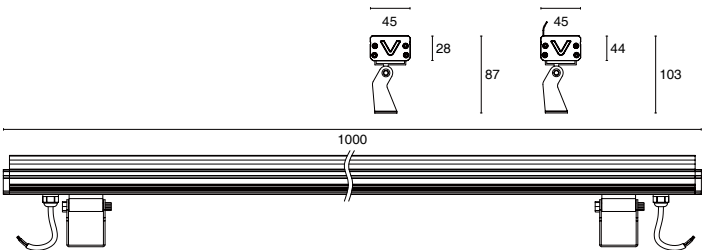

15*40°



Accessories

Loop in Loop out Cables with Male / Female Connectors



Included

VEGA 48-1000

VG481000


-  IP65
-  IK04
-  Class III
-  CE Certification
-  Net Weight 1.75kgs
-  2 PCS Rubber Cables with Waterproof Connectors, One Side Male, Another Side Female
-  OSRAM 3030 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
48 Watt	3200 lm	2700K 3000K 4000K 6000K	12° / 24° / 30° / 40° / 60° / Oval Lens 15*40°	DC24V (AC100- 245V as Options)	Aluminium + Tempered Glass	Aluminium in Dark Grey

Dimension

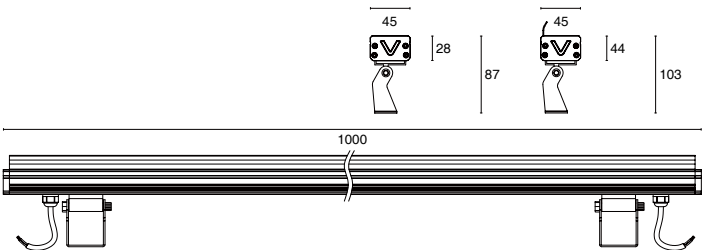

15*40°



Accessories

Loop in Loop out Cables with Male / Female Connectors



Included





VEGA 18-500

VG18500


-  IP65
-  IK04
-  Class III
-  CE Certification
-  Net Weight 1kgs
-  2 PCS Rubber Cables with Waterproof Connectors, One Side Male, Another Side Female
-  OSRAM 3030 LED
-  SDCM<5
-  Ra ≥ 80
-  5 Years Warranty



• **General Data**

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
18 Watt	1300 lm	2700K 3000K 4000K 6000K	12° / 24° / 30° / 40° / 60° / Oval Lens 15*40°	DC24V (AC100- 245V as Options)	Aluminium + Tempered Glass	Aluminium in Dark Grey

• **Dimension**

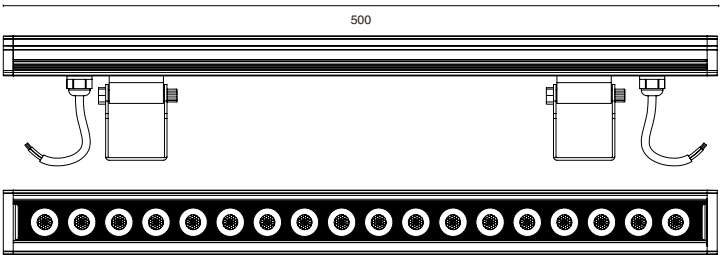

15*40°



• **Accessories**

Loop in Loop out Cables with Male / Female Connectors



Included

VEGA 24-500RGBW-DMX

VG24500RGBW


-  IP65
-  IK04
-  Class III
-  CE Certification
-  Net Weight 1.3kgs
-  2 PCS Rubber Cables with Waterproof Connectors, One Side Male, Another Side Female
-  3030 RGBW 4in1 LED
-  SDCM<5 for W
-  Ra ≥ 80 for W
-  5 Years Warranty



• **General Data**

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
24 Watt	1300 lm When All LEDs on	RGBW3000K	12° / 24° / 30° / 40° / 60° / Oval Lens 15*40°	DC24V	Aluminium + Tempered Glass	Aluminium in Dark Grey

• **Dimension**

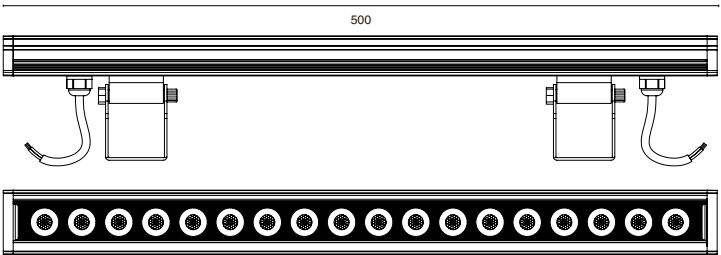

10°x45°



• **Accessories**

Loop in Loop out Cables with Male / Female Connectors



Included

VEGA 48-1000RGBW-DMX

VEGA 48-1000RGBW-DMX


-  IP65
-  IK04
-  Class III
-  CE Certification
-  Net Weight 2.3kgs
-  2 PCS Rubber Cables with Waterproof Connectors, One Side Male, Another Side Female
-  3030 RGBW 4in1 LED
-  SDCM<5 for W
-  Ra ≥ 80 for W
-  5 Years Warranty



General Data

Power	Lumen	CCT	Beam Angle	Input Voltage	Cover	Housing
48 Watt	2500 lm When All LEDs on	RGBW3000K	12° / 24° / 30° / 40° / 60° / Oval Lens 15*40°	DC24V	Aluminium + Tempered Glass	Aluminium in Dark Grey

Dimension

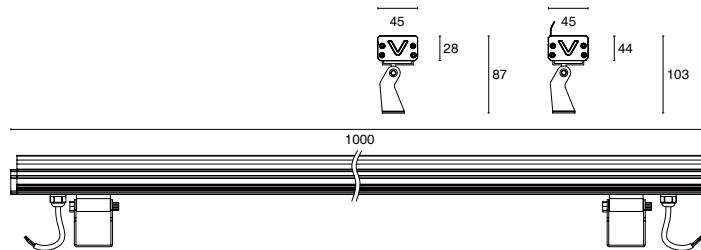

10°



Accessories

Loop in Loop out Cables with Male / Female Connectors



Included







DRIVERS AND CONNECTORS

Driver Products Features

- 150W or 300W capacity with four Voltage taps 12V thru 15V to compensate for Voltage loss.
- High-performance Toroidal Core runs cooler, reliable generate less noise.
- Heavy duty 304 Stainless Steel housing and durable components for corrosion resistant.
- Control device receptacles for optional timers and photocells.
- A built in circuit breaker to help protect against electrical short circuits.
- Colored wire markers & installation manual.

Connector Products Features

IP68 waterproof fast connector with silicone gel and 3-Pole Terminal block, for Cables with 2 or 3x 0.5mm²-2.5mm².

Application

Drivers and connectors are suitable for all of our lighting.







DRIVER 150W
K23-TF150




• **General Data**

Power	Input	Output	COM Port	Type	Housing	Finish
150 Watt	120V AC, 60Hz 1.6A	12V AC, 13V AC, 14V AC, 15V	1	Toroidal Core	Stainless Steel 304	Silver

• **Dimension**

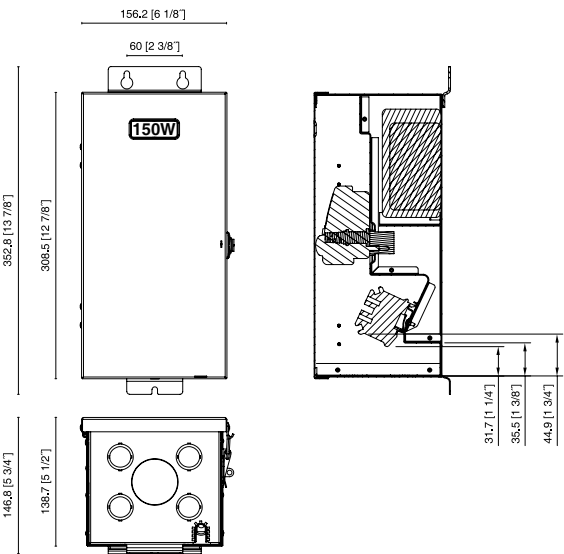

• **Accessories**

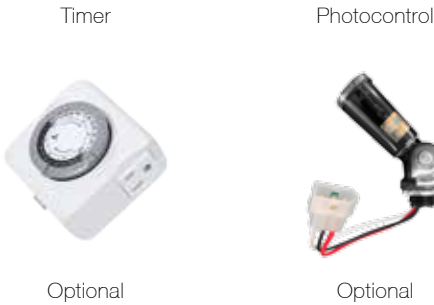

• **Features**

- 150W capacity with four voltage taps 12V thru 15V to compensate for voltage loss.
- High-performance toroidal core runs cooler , reliable generate less noise.
- Heavy duty 304 stainless steel housing and durable components for corrosion resistant .
- Control device receptacles for optional timers and photocells .
- A built in circuit breaker to help protect against electrical short circuits .
- Colored wire markers & installation manual .



DRIVER 300W
K23-TF300




• **General Data**

Power	Input	Output	COM Port	Type	Housing	Finish
300 Watt	120V AC, 60Hz 3.2A	12V AC, 13V AC, 14V AC, 15V	1	Toroidal Core	Stainless Steel 304	Silver

• **Dimension**

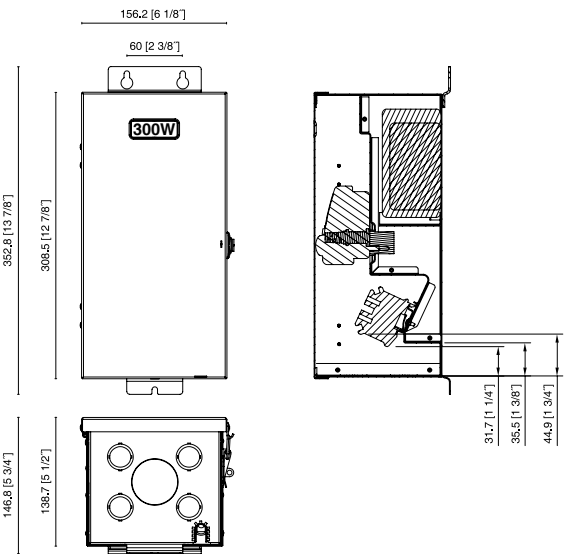

• **Accessories**

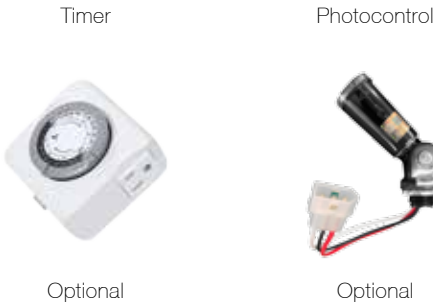

• **Features**

- 300W capacity with four voltage taps 12V thru 15V to compensate for voltage loss.
- High-performance toroidal core runs cooler, reliable generate less noise.
- Heavy duty 304 stainless steel housing and durable components for corrosion resistant.
- Control device receptacles for optional timers and photocells.
- A built in circuit breaker to help protect against electrical short circuits.
- Colored wire markers & installation manual.

TIMMER, PHOTOCONTROL



Timmer



Photocontrol



Photocontrol JL-404C specifications

• General Data

Power	Voltage	Rated Loading	Operate Levels	Leads	Failure Mode
1.8W@120V AC	120-277V AC, 50/60Hz	500W Tungsten, 850VA Ballast 5A e-Ballast	10-20Lx Turn-ON / 30- 80Lx Turn-Off	AWG #16, 105°C, 4" Min	Fail-Off

• Features

The Photocontrol JL-404C is applicable to control the street lighting, passage lighting and doorway lighting automatically in accordance with the ambient lighting level.

This product is designed with electronic circuits. Its quicker response with time delay of 3-10 seconds offers easy-to-test feature. Especially, model JL-404C provides a wide Voltage range for customer applications under almost power supplies.

Further, a preset 3-10 seconds time-delay might avoid mis-operation due to spotlight or lightning during the night time This product has been listed by UL LLC and is comply with the Standard for Non-industrial Photoelectric Switches for Lighting Control UL773A.

IP68 I TUBE GEL CONNECTOR

WRC-D-I-PY

-  IP68
-  IK08
-  CE Certification
-  ETL Certification
-  Net Weight 0.11 kgs
-  3 Years Warranty





IP68 Fast Connector with Silicone Gel and 3-Pole Terminal Block

• General Data

For Flexible Cables only	F
Cross-Section	2 or 3 x 0.5mm ² -2.5mm ²
Cable Diameter	5 mm - 11 mm
Rated Voltage, Max. Current	250V, Max. 24A
Operating Temperature	-40°C - 85°C

• Dimension

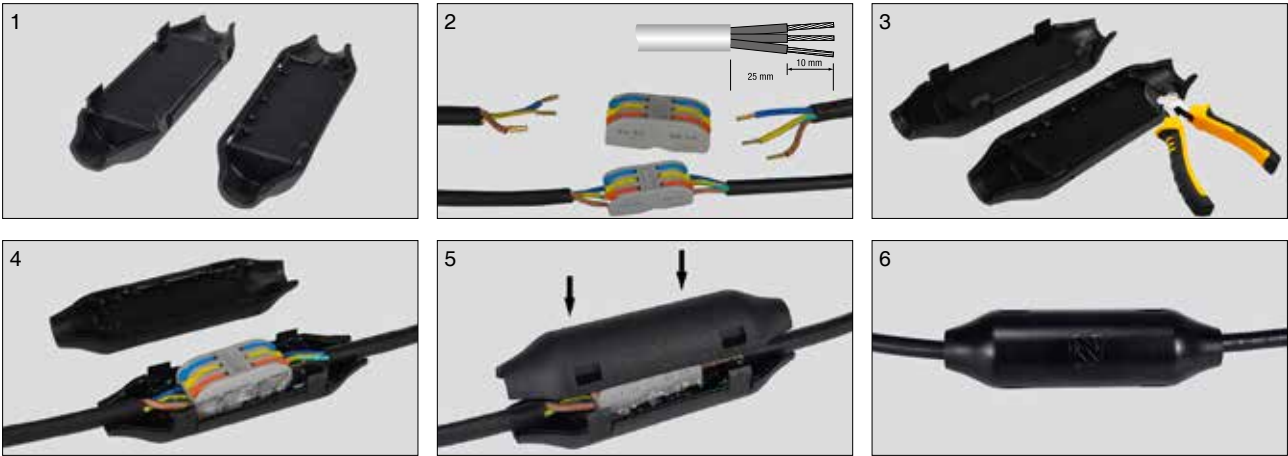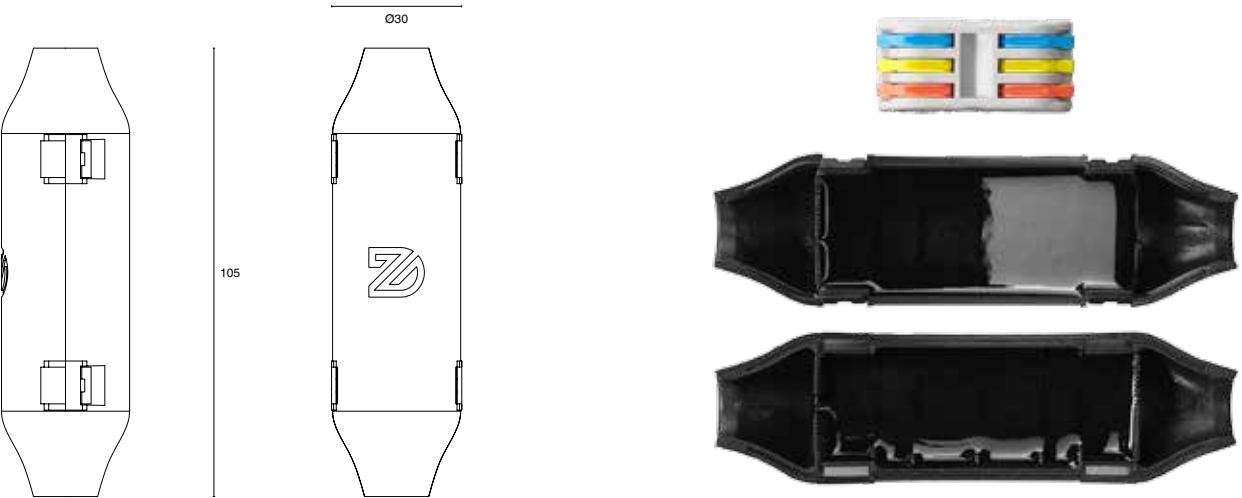

Notice:

All of the products and the pictures in this catalogue are with the protection of copyright law. They can't be issued at any other catalogues or other medias if it's without our company's permission. We keep the right to investigate and affix legal liability if any infringements for the products in this catalogue, including the structure design patent, appearance design, all of the pictures etc..

The copyright of all of the pictures in this catalogue is belong to  **NERTHUS**



North America Telephone: +1 (587) 887 5087

E-Mail: sales@nerthuslighting.com

Whatsapp: +1 (403) 708 6799

Website: www.nerthuslighting.com