



Indoor Luminaire Photometric Data

Description Information

Luminary Name: 55252		Lum. Catalog:	Test ID:
Lamp Name:		Lamp Catalog:	Test Date: 2025/06/27
Manufacture:		Shld. Ang(°):	Test Machine:GON-2000
Test Lab:		Frequency (Hz):	Lamp CCT(K): 3000 Ra:
Lum. Size(W*L*H):0.050m*-0.050m*0.000m		Lum. Area(m2):0.002	Lum. W(kg): 0.000
Test System: C, γ	Test Step: C=30.0 γ=1.0	Temp. (°C): 25	Humidity(%):


Character Parameter

Lamp Speciality Parameter	Luminaire Speciality Parameter	
Rated Flux(lm): 147.000	Luminary Flux(lm): 146.996	Field Angle(10%Imax): 68.7(°)
Rated Power(W): 3	Luminary Efficiency: 100.00%	Down Lumens&Percent: 146.996lm 100.00%
Rated Voltage(V): 12	Luminary EER(lm/W): 49.163	Up Lumens&Percent: 0.000lm 0.00%
Tested Power(W): 2.990	Max. Candela(cd): 309.665	S/MH: C0_a180=0.630 C90_270=0.625
Lamps' Inside: 1	Max Cand@Ang. (°): C=180.0 γ=2.0	CIE Type: Semi-Direct
Tested Electrics(V, A, pf):11.9, 0.250	Beam Angle(50%Imax): 38.4(°)	ErP Φ use(90°): 146.582lm
Lamp Size(W*L*H):0.050m*-0.050m*0.000m	Left=-16.6°, Right=21.9°	IRF(%): 449.093

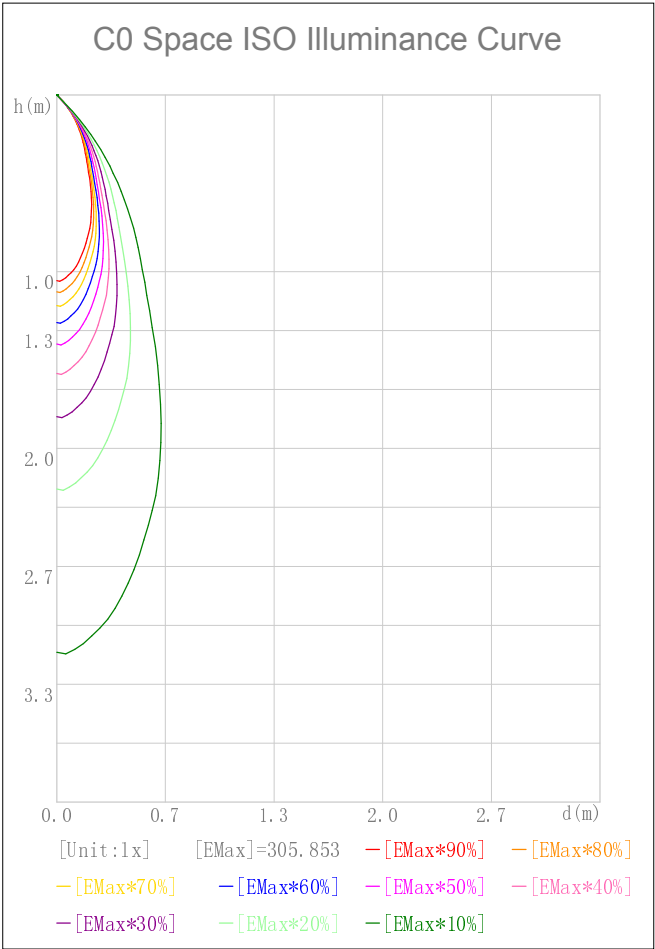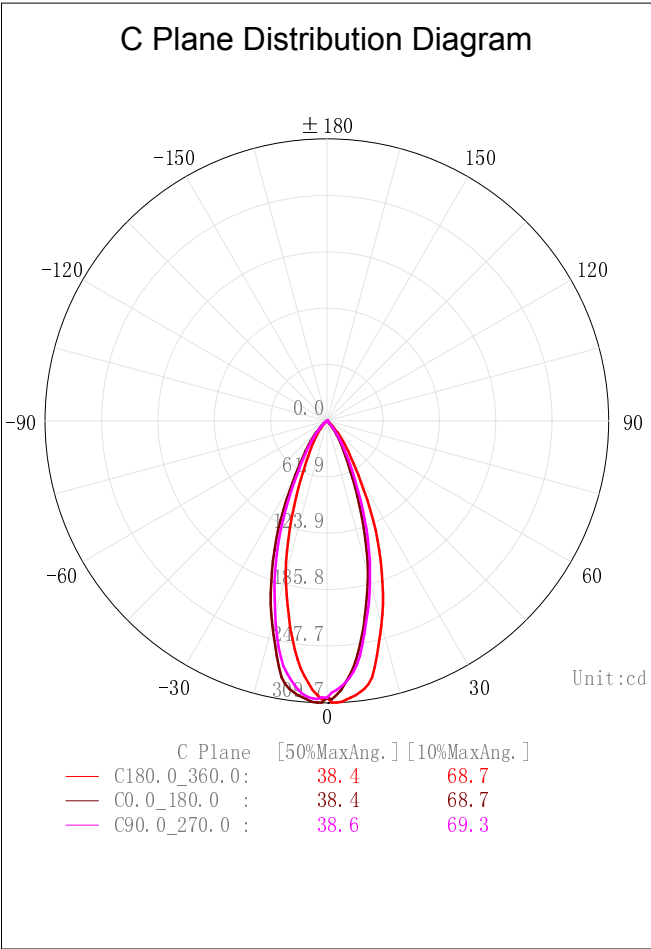

2D Plane Light Intensity Distribution Curve


Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/06/27

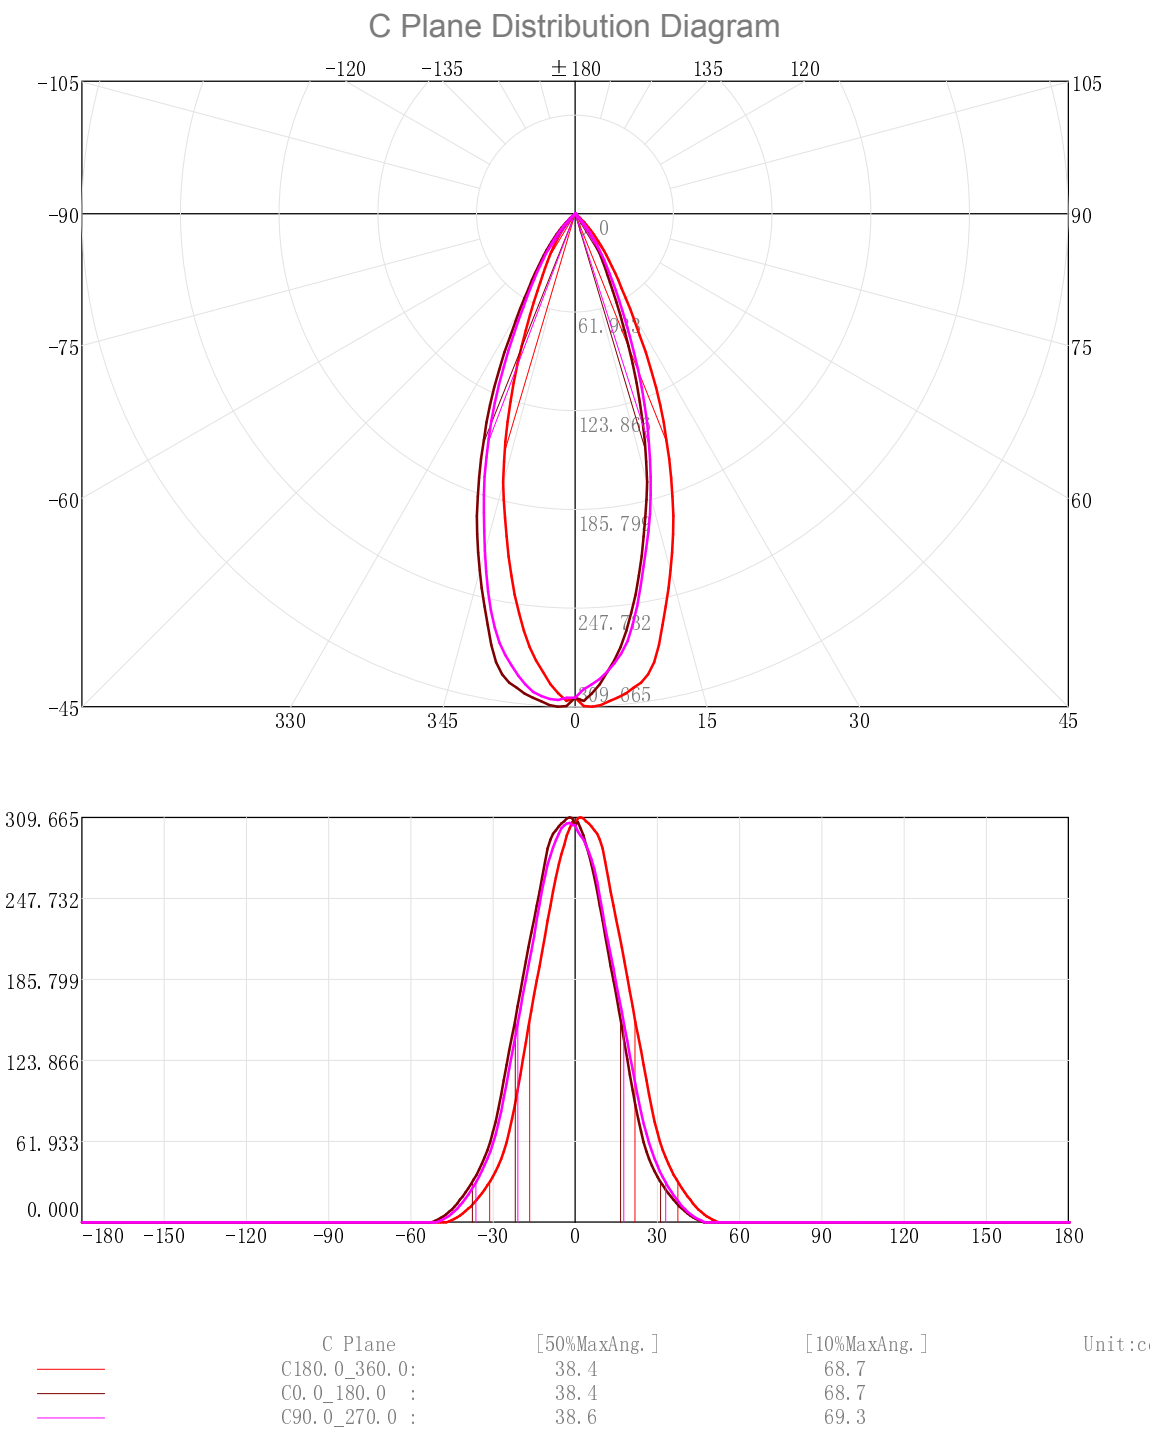

3D Light Intensity Distribution Modal

Lum. Name:55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/06/27

3D Light Intensity Distribution Modal

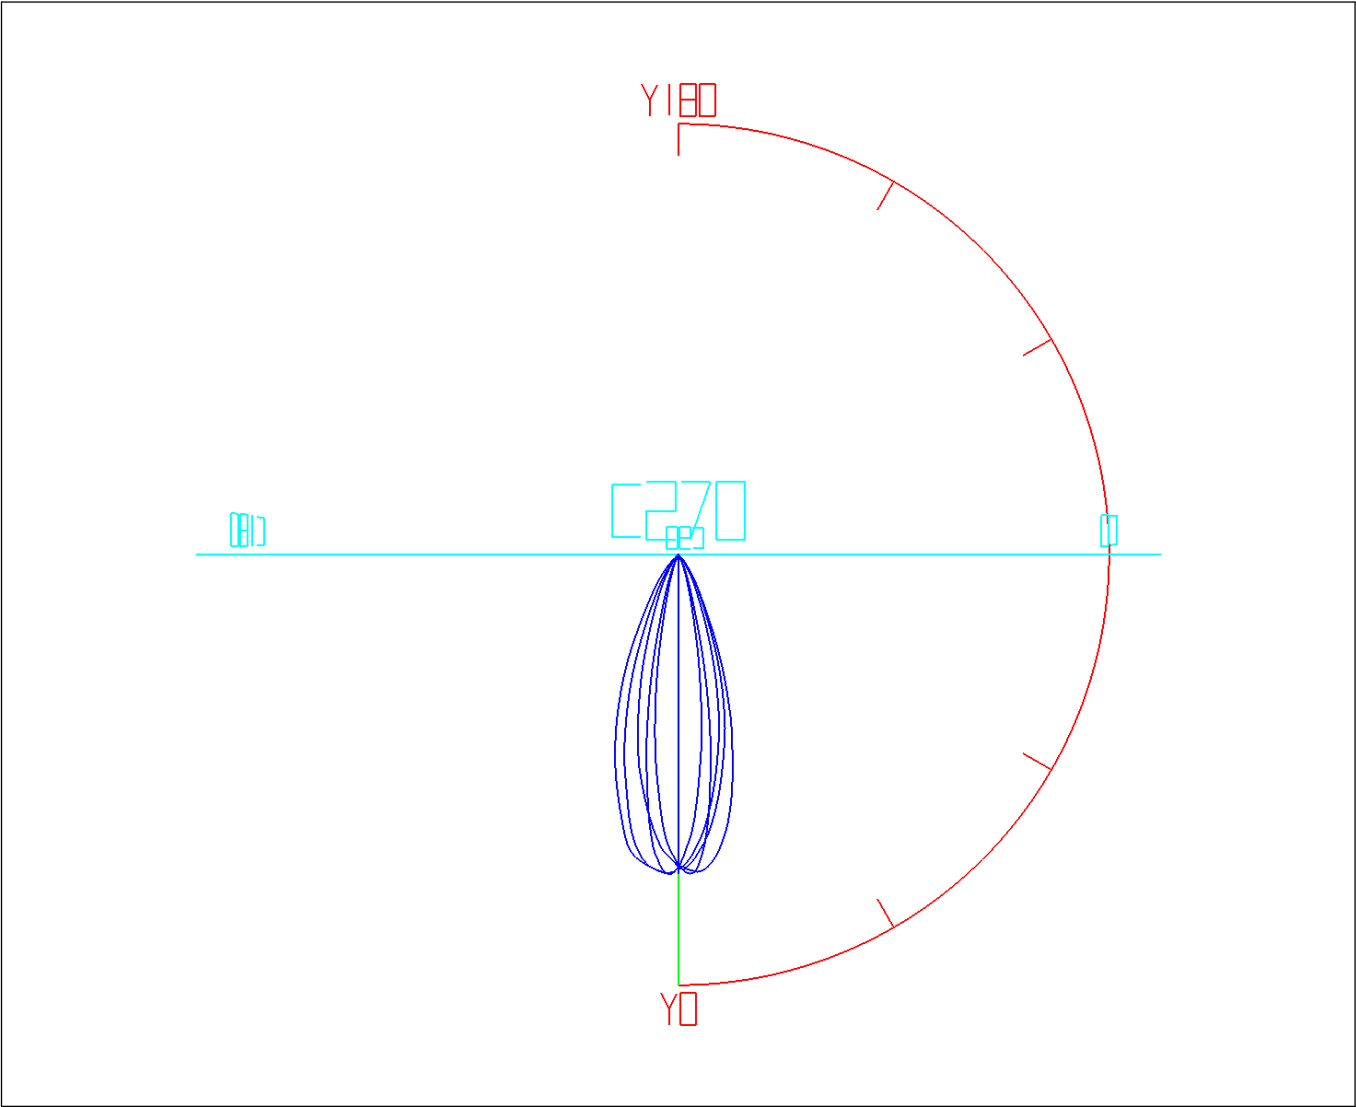

Curves:

View Angles:

3D Model

Orient:0

Fixture

Tilt:0

Vert. HUD

Roll:0

Hori. HUD

Spin:0

IES Indoor Report

Photometric Filename:GL-1004-0300-O-ETL-30D-3000K-不帶遮光罩.IES

Zonal Flux Tabulation

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	0.29	0.29	0.20	0.20	47.0-48.0	0.16	146.79	0.11	99.86
1.0-2.0	0.87	1.16	0.59	0.79	48.0-49.0	0.11	146.90	0.07	99.93
2.0-3.0	1.44	2.60	0.98	1.77	49.0-50.0	0.07	146.96	0.04	99.97
3.0-4.0	1.99	4.59	1.36	3.12	50.0-51.0	0.03	146.99	0.02	99.99
4.0-5.0	2.53	7.12	1.72	4.84	51.0-52.0	0.01	147.00	0.00	100.00
5.0-6.0	3.05	10.17	2.07	6.92	52.0-53.0	0.00	147.00	0.00	100.00
6.0-7.0	3.52	13.69	2.40	9.31	53.0-54.0	0.00	147.00	0.00	100.00
7.0-8.0	3.96	17.65	2.70	12.01	54.0-55.0	0.00	147.00	0.00	100.00
8.0-9.0	4.36	22.01	2.97	14.98	55.0-56.0	0.00	147.00	0.00	100.00
9.0-10.0	4.71	26.73	3.21	18.18	56.0-57.0	0.00	147.00	0.00	100.00
10.0-11.0	5.01	31.74	3.41	21.59	57.0-58.0	0.00	147.00	0.00	100.00
11.0-12.0	5.26	37.01	3.58	25.17	58.0-59.0	0.00	147.00	0.00	100.00
12.0-13.0	5.46	42.47	3.72	28.89	59.0-60.0	0.00	147.00	0.00	100.00
13.0-14.0	5.61	48.08	3.82	32.71	60.0-61.0	0.00	147.00	0.00	100.00
14.0-15.0	5.71	53.79	3.88	36.59	61.0-62.0	0.00	147.00	0.00	100.00
15.0-16.0	5.75	59.54	3.91	40.50	62.0-63.0	0.00	147.00	0.00	100.00
16.0-17.0	5.76	65.30	3.92	44.42	63.0-64.0	0.00	147.00	0.00	100.00
17.0-18.0	5.72	71.01	3.89	48.31	64.0-65.0	0.00	147.00	0.00	100.00
18.0-19.0	5.63	76.65	3.83	52.14	65.0-66.0	0.00	147.00	0.00	100.00
19.0-20.0	5.51	82.16	3.75	55.89	66.0-67.0	0.00	147.00	0.00	100.00
20.0-21.0	5.34	87.49	3.63	59.52	67.0-68.0	0.00	147.00	0.00	100.00
21.0-22.0	5.13	92.62	3.49	63.01	68.0-69.0	0.00	147.00	0.00	100.00
22.0-23.0	4.89	97.52	3.33	66.34	69.0-70.0	0.00	147.00	0.00	100.00
23.0-24.0	4.63	102.14	3.15	69.48	70.0-71.0	0.00	147.00	0.00	100.00
24.0-25.0	4.34	106.49	2.96	72.44	71.0-72.0	0.00	147.00	0.00	100.00
25.0-26.0	4.05	110.54	2.76	75.20	72.0-73.0	0.00	147.00	0.00	100.00
26.0-27.0	3.76	114.30	2.56	77.75	73.0-74.0	0.00	147.00	0.00	100.00
27.0-28.0	3.47	117.77	2.36	80.11	74.0-75.0	0.00	147.00	0.00	100.00
28.0-29.0	3.19	120.96	2.17	82.29	75.0-76.0	0.00	147.00	0.00	100.00
29.0-30.0	2.94	123.90	2.00	84.29	76.0-77.0	0.00	147.00	0.00	100.00
30.0-31.0	2.71	126.61	1.84	86.13	77.0-78.0	0.00	147.00	0.00	100.00
31.0-32.0	2.50	129.11	1.70	87.83	78.0-79.0	0.00	147.00	0.00	100.00
32.0-33.0	2.30	131.41	1.56	89.39	79.0-80.0	0.00	147.00	0.00	100.00
33.0-34.0	2.11	133.52	1.44	90.83	80.0-81.0	0.00	147.00	0.00	100.00
34.0-35.0	1.93	135.45	1.31	92.14	81.0-82.0	0.00	147.00	0.00	100.00
35.0-36.0	1.76	137.21	1.20	93.34	82.0-83.0	0.00	147.00	0.00	100.00
36.0-37.0	1.59	138.80	1.08	94.42	83.0-84.0	0.00	147.00	0.00	100.00
37.0-38.0	1.43	140.23	0.97	95.40	84.0-85.0	0.00	147.00	0.00	100.00
38.0-39.0	1.26	141.49	0.86	96.25	85.0-86.0	0.00	147.00	0.00	100.00
39.0-40.0	1.11	142.60	0.75	97.01	86.0-87.0	0.00	147.00	0.00	100.00
40.0-41.0	0.96	143.56	0.65	97.66	87.0-88.0	0.00	147.00	0.00	100.00
41.0-42.0	0.82	144.37	0.55	98.21	88.0-89.0	0.00	147.00	0.00	100.00
42.0-43.0	0.68	145.05	0.46	98.68	89.0-90.0	0.00	147.00	0.00	100.00
43.0-44.0	0.56	145.61	0.38	99.05	90.0-91.0	0.00	147.00	0.00	100.00
44.0-45.0	0.44	146.05	0.30	99.36	91.0-92.0	0.00	147.00	0.00	100.00
45.0-46.0	0.33	146.39	0.23	99.58	92.0-93.0	0.00	147.00	0.00	100.00
46.0-47.0	0.24	146.63	0.16	99.75	93.0-94.0	0.00	147.00	0.00	100.00

IES Indoor Report


Photometric Filename:GL-1004-0300-O-ETL-30D-3000K-不帶遮光罩.IES

Zonal Flux Tabulation - (Cont.)

Zone( γ )	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone( γ )	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.00	147.00	0.00	100.00	141.0-142.0	0.00	147.00	0.00	100.00
95.0-96.0	0.00	147.00	0.00	100.00	142.0-143.0	0.00	147.00	0.00	100.00
96.0-97.0	0.00	147.00	0.00	100.00	143.0-144.0	0.00	147.00	0.00	100.00
97.0-98.0	0.00	147.00	0.00	100.00	144.0-145.0	0.00	147.00	0.00	100.00
98.0-99.0	0.00	147.00	0.00	100.00	145.0-146.0	0.00	147.00	0.00	100.00
99.0-100.0	0.00	147.00	0.00	100.00	146.0-147.0	0.00	147.00	0.00	100.00
100.0-101.0	0.00	147.00	0.00	100.00	147.0-148.0	0.00	147.00	0.00	100.00
101.0-102.0	0.00	147.00	0.00	100.00	148.0-149.0	0.00	147.00	0.00	100.00
102.0-103.0	0.00	147.00	0.00	100.00	149.0-150.0	0.00	147.00	0.00	100.00
103.0-104.0	0.00	147.00	0.00	100.00	150.0-151.0	0.00	147.00	0.00	100.00
104.0-105.0	0.00	147.00	0.00	100.00	151.0-152.0	0.00	147.00	0.00	100.00
105.0-106.0	0.00	147.00	0.00	100.00	152.0-153.0	0.00	147.00	0.00	100.00
106.0-107.0	0.00	147.00	0.00	100.00	153.0-154.0	0.00	147.00	0.00	100.00
107.0-108.0	0.00	147.00	0.00	100.00	154.0-155.0	0.00	147.00	0.00	100.00
108.0-109.0	0.00	147.00	0.00	100.00	155.0-156.0	0.00	147.00	0.00	100.00
109.0-110.0	0.00	147.00	0.00	100.00	156.0-157.0	0.00	147.00	0.00	100.00
110.0-111.0	0.00	147.00	0.00	100.00	157.0-158.0	0.00	147.00	0.00	100.00
111.0-112.0	0.00	147.00	0.00	100.00	158.0-159.0	0.00	147.00	0.00	100.00
112.0-113.0	0.00	147.00	0.00	100.00	159.0-160.0	0.00	147.00	0.00	100.00
113.0-114.0	0.00	147.00	0.00	100.00	160.0-161.0	0.00	147.00	0.00	100.00
114.0-115.0	0.00	147.00	0.00	100.00	161.0-162.0	0.00	147.00	0.00	100.00
115.0-116.0	0.00	147.00	0.00	100.00	162.0-163.0	0.00	147.00	0.00	100.00
116.0-117.0	0.00	147.00	0.00	100.00	163.0-164.0	0.00	147.00	0.00	100.00
117.0-118.0	0.00	147.00	0.00	100.00	164.0-165.0	0.00	147.00	0.00	100.00
118.0-119.0	0.00	147.00	0.00	100.00	165.0-166.0	0.00	147.00	0.00	100.00
119.0-120.0	0.00	147.00	0.00	100.00	166.0-167.0	0.00	147.00	0.00	100.00
120.0-121.0	0.00	147.00	0.00	100.00	167.0-168.0	0.00	147.00	0.00	100.00
121.0-122.0	0.00	147.00	0.00	100.00	168.0-169.0	0.00	147.00	0.00	100.00
122.0-123.0	0.00	147.00	0.00	100.00	169.0-170.0	0.00	147.00	0.00	100.00
123.0-124.0	0.00	147.00	0.00	100.00	170.0-171.0	0.00	147.00	0.00	100.00
124.0-125.0	0.00	147.00	0.00	100.00	171.0-172.0	0.00	147.00	0.00	100.00
125.0-126.0	0.00	147.00	0.00	100.00	172.0-173.0	0.00	147.00	0.00	100.00
126.0-127.0	0.00	147.00	0.00	100.00	173.0-174.0	0.00	147.00	0.00	100.00
127.0-128.0	0.00	147.00	0.00	100.00	174.0-175.0	0.00	147.00	0.00	100.00
128.0-129.0	0.00	147.00	0.00	100.00	175.0-176.0	0.00	147.00	0.00	100.00
129.0-130.0	0.00	147.00	0.00	100.00	176.0-177.0	0.00	147.00	0.00	100.00
130.0-131.0	0.00	147.00	0.00	100.00	177.0-178.0	0.00	147.00	0.00	100.00
131.0-132.0	0.00	147.00	0.00	100.00	178.0-179.0	0.00	147.00	0.00	100.00
132.0-133.0	0.00	147.00	0.00	100.00	179.0-180.0	0.00	147.00	0.00	100.00
133.0-134.0	0.00	147.00	0.00	100.00					
134.0-135.0	0.00	147.00	0.00	100.00					
135.0-136.0	0.00	147.00	0.00	100.00					
136.0-137.0	0.00	147.00	0.00	100.00					
137.0-138.0	0.00	147.00	0.00	100.00					
138.0-139.0	0.00	147.00	0.00	100.00					
139.0-140.0	0.00	147.00	0.00	100.00					
140.0-141.0	0.00	147.00	0.00	100.00					

Rectangle ISO Lighting Intensity Diagram

Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/06/27

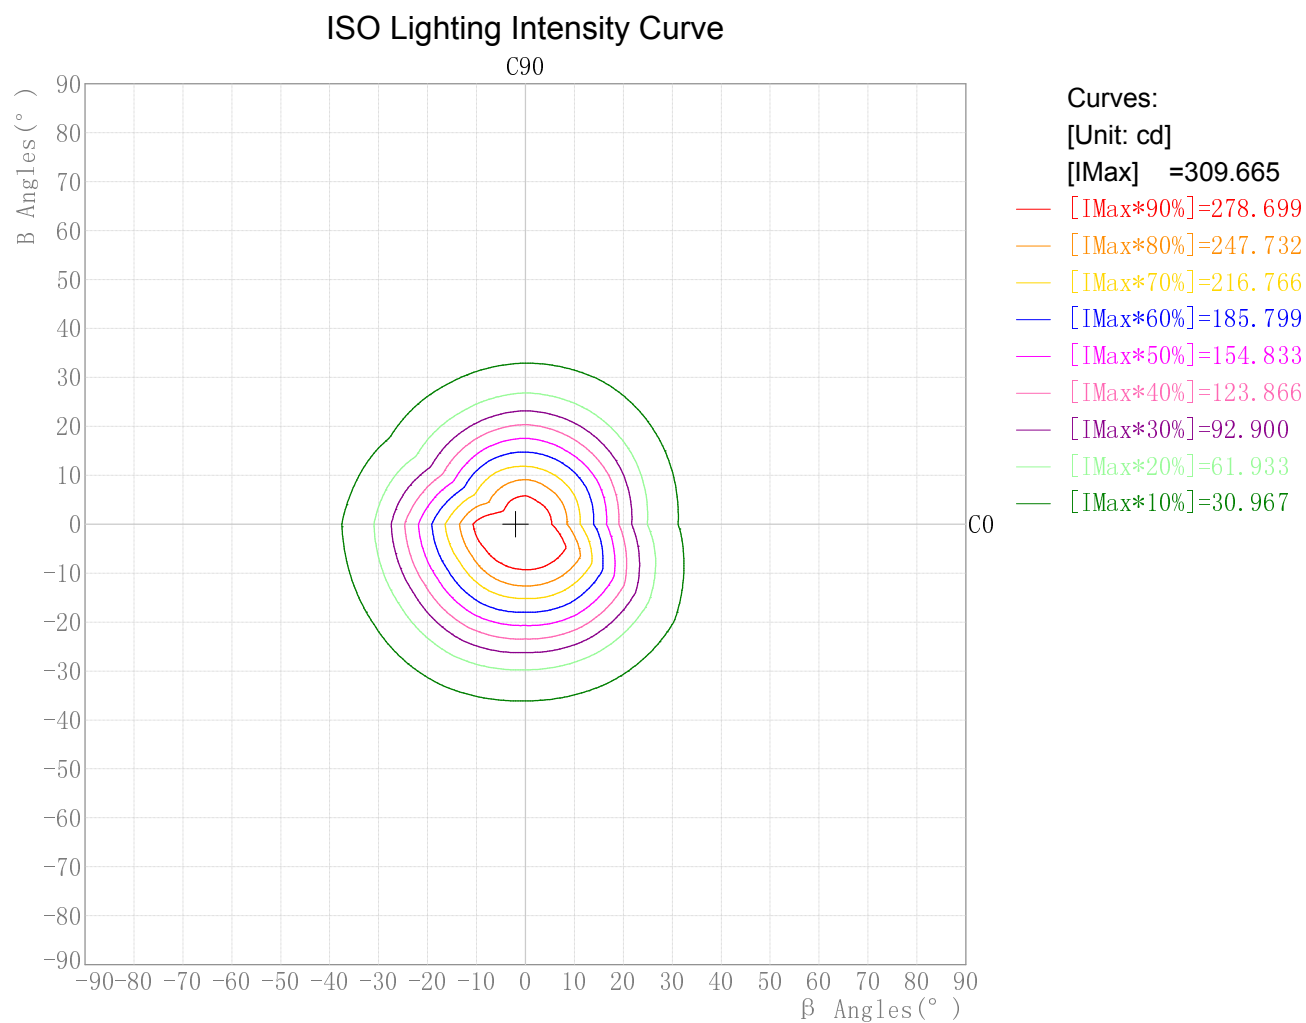


Maximum Light Intensity(cd): 309.67

Maximum Cand.@Angle: H=-2.0°,V=0.0°

Plane ISO-Illuminance Diagram

Lum. Name:55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/06/27

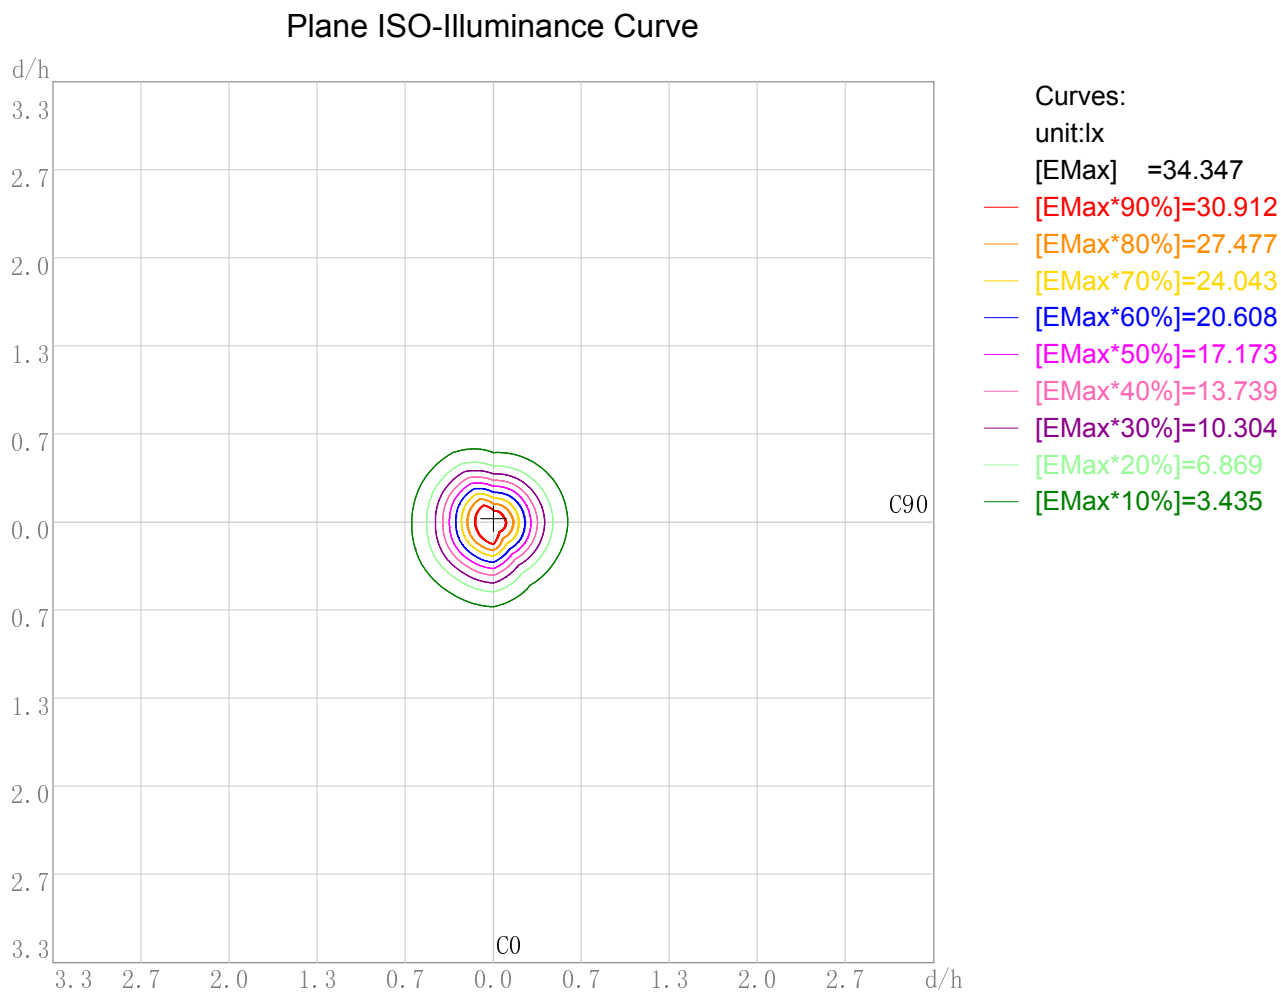


Working Plane Luminaire Mounting Height(m): 3.00  
Working Plane Maximum Illuminance(lx): 34.35  
Working Plane Maximum Illuminance Position(d/h):H0.0 V-0.0

3D Plane ISO Illuminance Diagram

Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/06/27

3D Plane Illuminance Modal

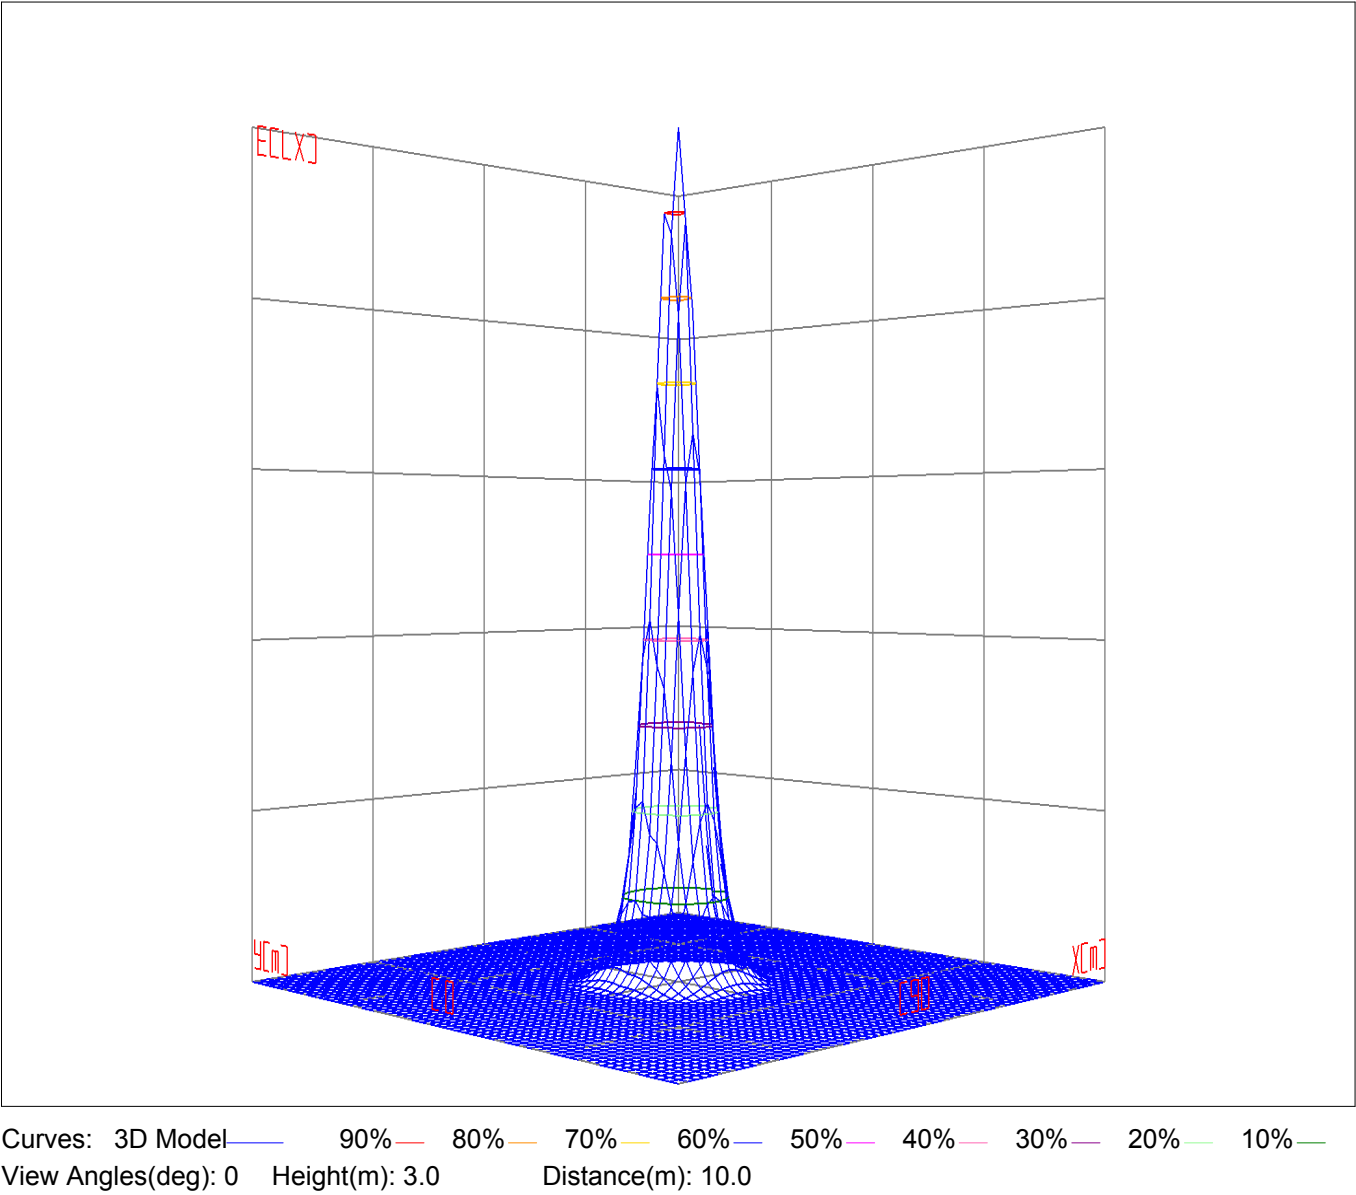




Space ISO Illuminance Diagram

Lum. Name:55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/06/27


Space ISO Illuminance Curve

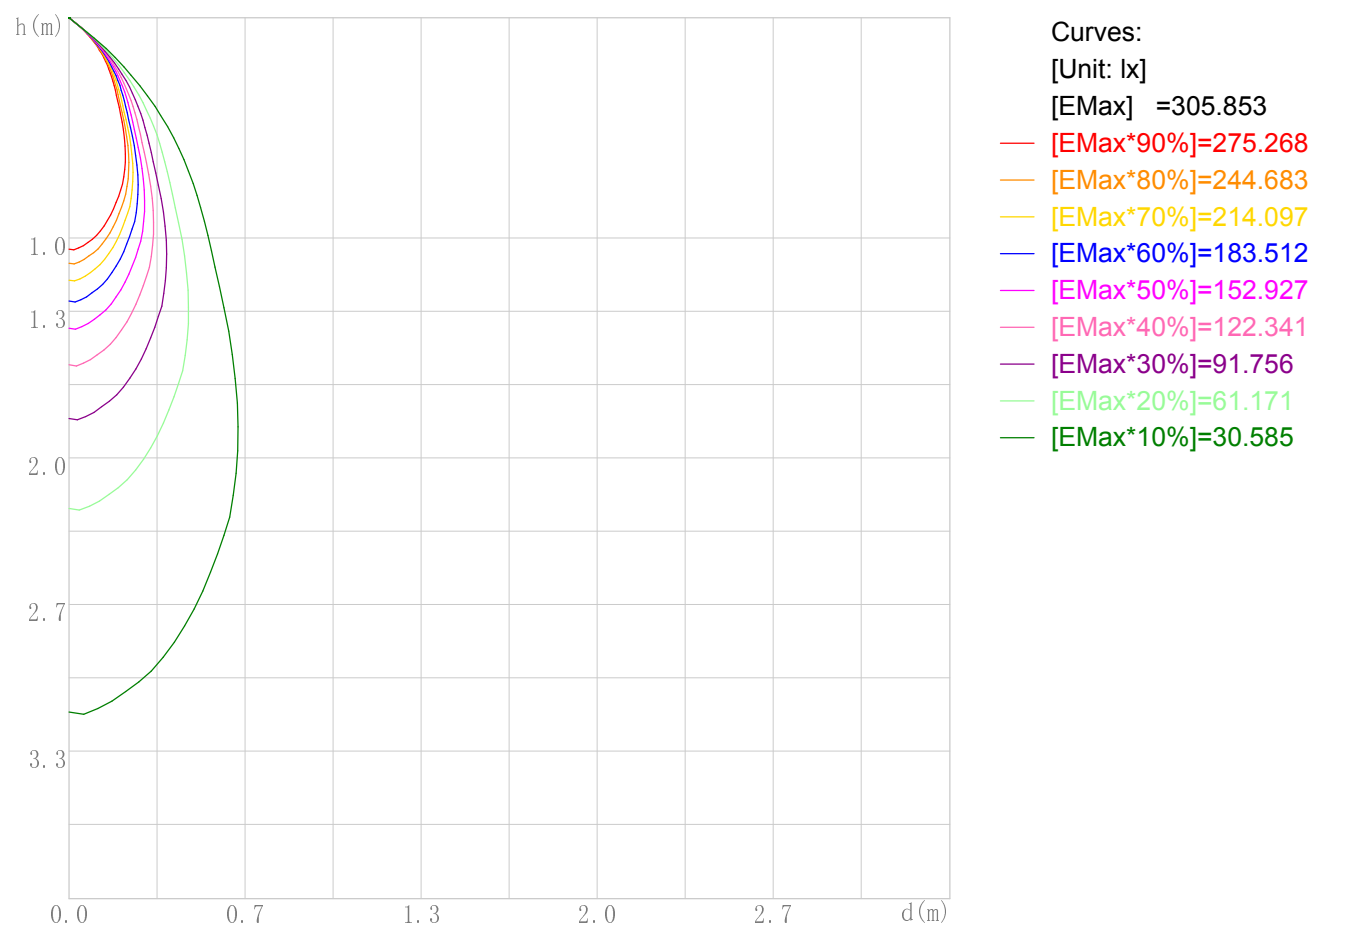

Space Plane Maximum Illuminance and @Angle:305.85lx,1.0deg  
Plane Maximum Lighting Intensity and @Angle:305.993cd,0deg

Illuminance-Distance Diagram

Lum. Name:55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/06/27

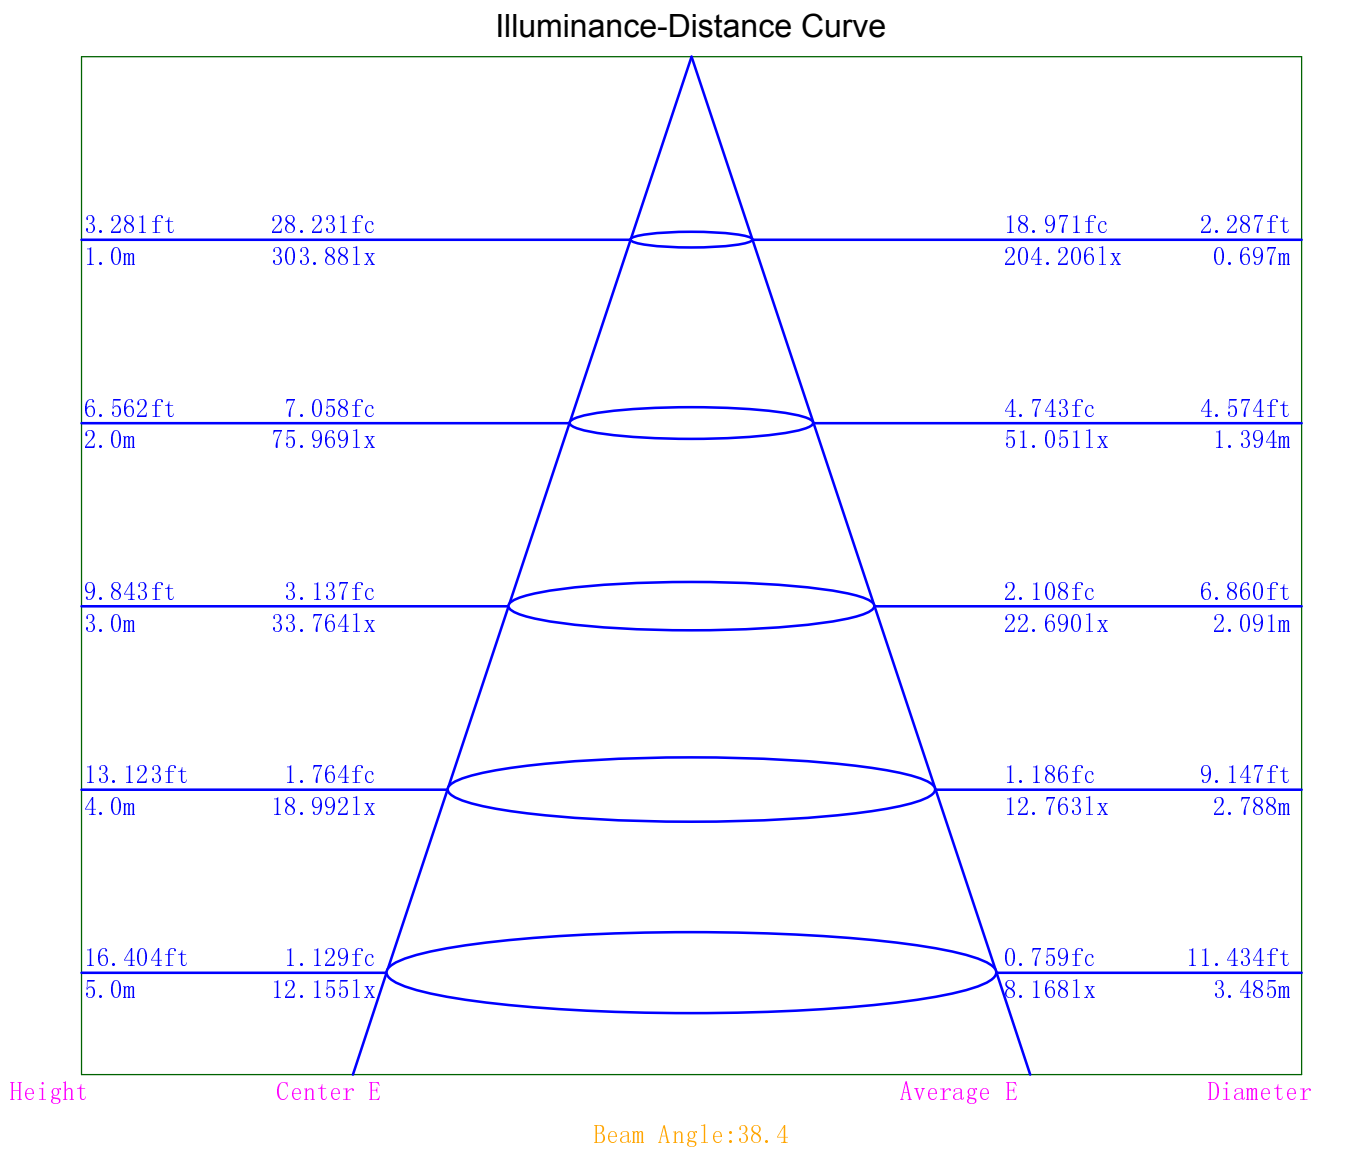

Indoor Luminance Limiting Curves

Lum. Name:55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date:2025/06/27


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama (deg)	45	50	55	60	65	70	75	80	85
C0	1224	0	0	0	0	0	0	0	0
C90	1755	0	0	0	0	0	0	0	0

Luminance Limiting Curve

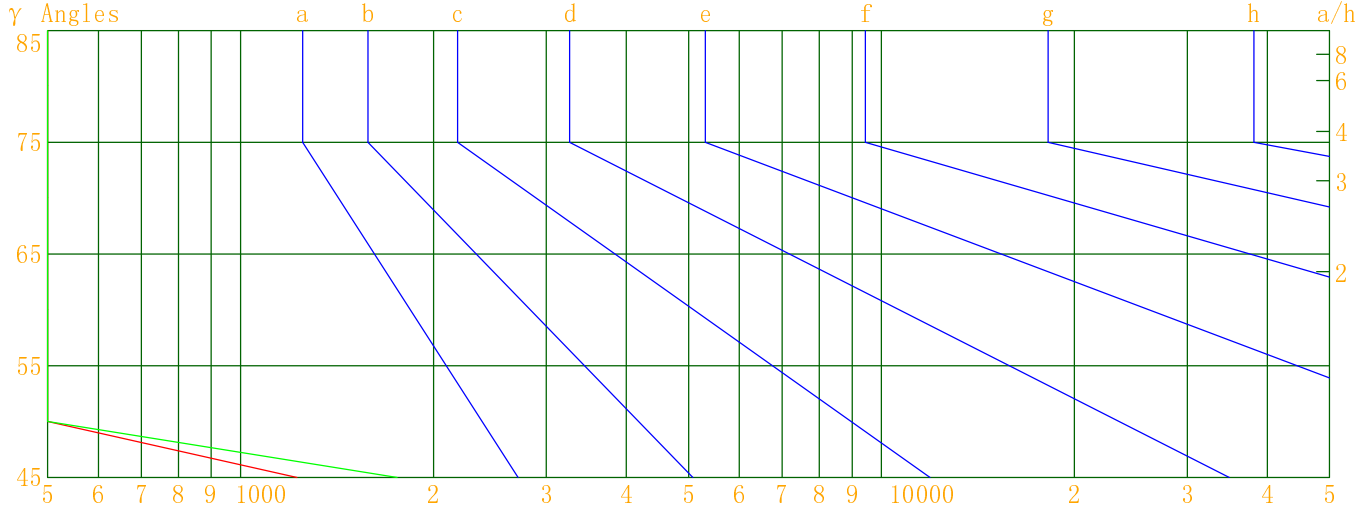


Luminous Size:Length(m)=-0.050Width(m)=-0.050Height(m)=0.000Area(m^2)=0.001963

Luminous Type:Without Luminous Side

Luminous Curves:C0-C180 Color: C90-C270 Color:

Indoor Budgetary Estimate Table

Lum. Name:55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/06/27

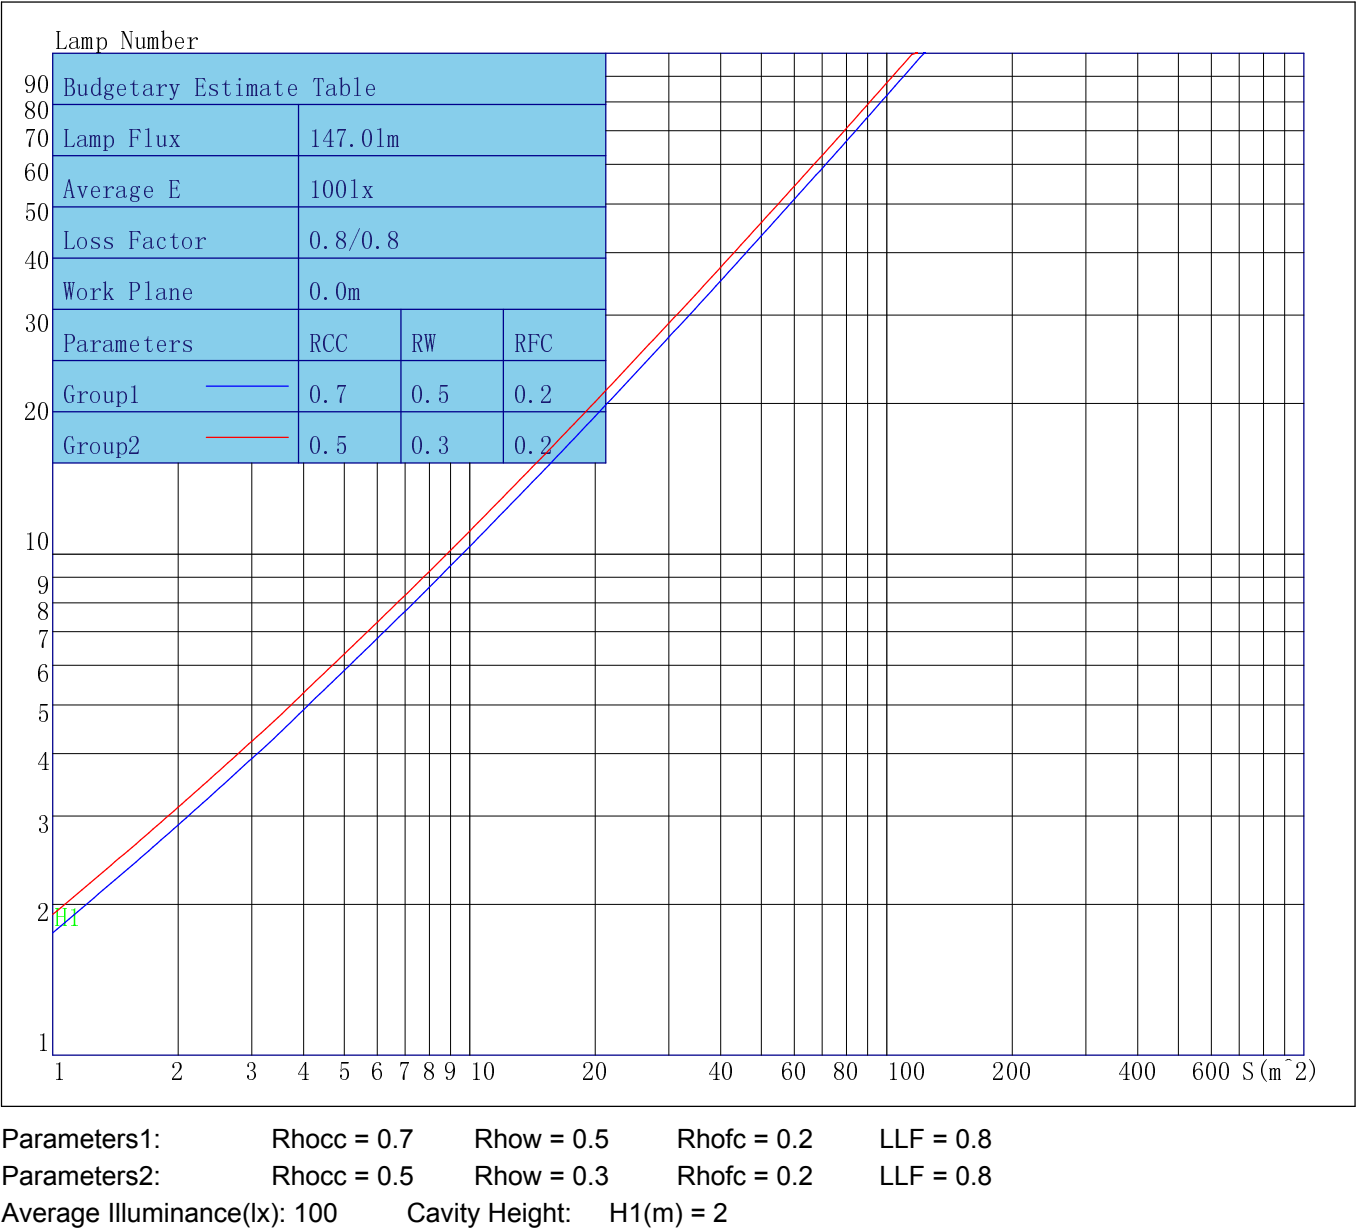

Indoor Coefficient of Utilization Table

Lum. Name:55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/06/27

Coefficients of Utilization – Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95
2	109	105	102	99	107	104	100	98	100	98	95	97	95	93	95	93	92	90
3	105	99	95	92	103	98	94	91	95	92	89	93	90	88	91	89	87	85
4	101	94	89	86	99	93	88	85	91	87	84	89	86	83	87	84	82	81
5	96	89	84	80	95	88	84	80	87	82	79	85	81	79	83	80	78	77
6	92	85	80	76	91	84	79	76	83	78	75	81	78	75	80	77	74	73
7	89	81	76	72	88	80	75	72	79	75	71	78	74	71	77	73	71	69
8	85	77	72	68	84	76	72	68	75	71	68	75	71	68	74	70	67	66
9	82	74	69	65	81	73	68	65	72	68	65	71	67	65	71	67	64	63
10	79	70	65	62	78	70	65	62	69	65	62	69	65	62	68	64	62	60

Unified Glare Rating Table

Lum. Name:55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/06/27

Unified Glare Rating Table

Ceiling RCC		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size		Vewed crosswise					Vewed endwise				
X=2H	Y=2H	11.0	11.9	11.4	12.2	12.6	10.4	11.3	10.8	11.6	12.0
	Y=3H	10.8	11.6	11.2	11.9	12.3	10.2	11.0	10.6	11.3	11.7
	Y=4H	10.7	11.4	11.1	11.8	12.2	10.1	10.8	10.5	11.2	11.6
	Y=6H	10.6	11.3	11.0	11.6	12.0	10.0	10.7	10.4	11.0	11.4
	Y=8H	10.5	11.1	11.0	11.5	12.0	9.9	10.6	10.4	10.9	11.4
	Y=12H	10.5	11.1	10.9	11.4	11.9	9.9	10.5	10.3	10.8	11.3
X=4H	Y=2H	10.7	11.4	11.1	11.8	12.2	10.1	10.8	10.5	11.2	11.6
	Y=3H	10.5	11.1	10.9	11.5	11.9	9.9	10.5	10.3	10.9	11.3
	Y=4H	10.4	10.9	10.8	11.3	11.8	9.8	10.3	10.2	10.7	11.2
	Y=6H	10.2	10.7	10.7	11.1	11.6	9.6	10.1	10.1	10.5	11.0
	Y=8H	10.2	10.6	10.6	11.0	11.5	9.6	10.0	10.0	10.4	10.9
	Y=12H	10.1	10.4	10.6	10.9	11.4	9.5	9.8	10.0	10.3	10.8
X=8H	Y=4H	10.2	10.6	10.6	11.0	11.5	9.6	10.0	10.0	10.4	10.9
	Y=6H	10.0	10.3	10.5	10.9	11.4	9.4	9.8	9.9	10.3	10.8
	Y=8H	10.0	10.2	10.5	10.8	11.3	9.4	9.6	9.9	10.2	10.7
	Y=12H	9.9	10.1	10.4	10.6	11.2	9.3	9.5	9.8	10.0	10.6
X=12H	Y=4H	10.1	10.4	10.6	10.9	11.4	9.5	9.8	10.0	10.3	10.8
	Y=6H	10.0	10.2	10.5	10.7	11.3	9.4	9.6	9.9	10.1	10.7
	Y=8H	9.9	10.1	10.4	10.6	11.2	9.3	9.5	9.8	10.0	10.6
Variations with the objverver position at spacings											
S=1.0H		0.0/0.0					0.0/0.0				
S=1.5H		0.0/0.0					0.0/0.0				
S=2.0H		0.0/0.0					0.0/0.0				
Reduced UGR Table:											
Nordic Standard Table:		BK0					BK0				
Correction Value		0.0					0.0				

o the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

**Photometric Filename:GL-1004-0300-O-ETL-30D-3000K-不帶遮光罩.IES**

## Candela Tabulation

V/H	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0	C300.0	C330.0
γ 0.0	303.88	303.88	303.88	303.88	303.88	303.88	303.88	303.88	303.88	303.88	303.88	303.88
γ 1.0	305.99	303.44	299.83	298.70	297.79	298.67	309.21	307.26	305.11	303.82	302.87	302.43
γ 2.0	301.40	299.63	295.33	295.76	295.29	295.84	309.67	307.69	306.55	305.52	304.24	304.16
γ 3.0	295.86	294.57	289.95	292.66	292.40	292.60	308.91	306.41	305.97	305.08	304.99	304.71
γ 4.0	288.49	287.58	285.11	288.29	288.61	287.62	306.77	304.58	304.42	303.62	304.38	305.28
γ 5.0	281.51	281.37	280.21	283.25	283.36	280.12	304.96	302.36	302.06	301.32	303.13	303.45
γ 6.0	273.60	273.83	273.23	277.56	276.89	272.66	302.83	299.75	297.96	297.17	300.44	300.54
γ 7.0	263.85	264.60	264.96	270.33	268.40	263.57	299.92	295.50	292.79	292.33	295.52	296.00
γ 8.0	253.20	254.46	254.90	260.43	258.57	254.68	297.19	290.42	286.46	286.56	288.75	290.29
γ 9.0	242.19	244.75	244.88	249.20	248.12	245.16	292.70	283.90	281.49	280.54	282.20	283.63
γ 10.0	230.82	234.02	234.57	237.17	237.97	235.61	285.81	276.42	274.37	273.65	274.64	275.63
γ 11.0	219.04	223.38	223.55	225.45	228.38	225.88	275.73	267.16	264.65	264.65	266.15	267.58
γ 12.0	207.05	212.10	212.99	214.77	218.49	216.35	263.90	256.26	255.51	254.67	256.36	258.72
γ 13.0	195.94	201.17	203.56	204.83	207.74	205.06	252.99	244.00	244.65	243.26	246.33	248.07
γ 14.0	184.88	190.71	192.58	194.04	196.53	193.10	242.15	232.11	233.41	231.33	235.41	237.22
γ 15.0	174.44	179.96	180.21	182.88	184.35	180.50	231.74	221.09	222.04	218.84	223.88	225.51
γ 16.0	161.87	168.33	168.04	171.85	172.39	167.61	221.19	211.44	211.10	207.02	212.54	213.12
γ 17.0	149.53	155.95	156.13	161.11	160.23	155.18	210.40	201.25	200.56	196.05	201.54	200.75
γ 18.0	137.41	143.51	144.22	149.86	147.97	143.17	199.39	190.11	190.76	185.60	190.12	188.98
γ 19.0	124.92	131.70	133.26	138.74	136.08	132.17	187.59	177.95	179.58	174.60	180.13	178.16
γ 20.0	112.82	119.80	122.34	127.64	124.99	120.23	176.38	166.52	167.63	162.69	168.34	167.13
γ 21.0	100.92	108.42	112.10	116.65	113.74	109.38	164.94	155.21	156.33	151.23	156.29	154.14
γ 22.0	89.74	97.42	101.57	105.66	102.29	98.45	153.15	144.24	145.26	140.48	144.42	141.92
γ 23.0	79.43	86.69	91.16	94.74	91.31	87.68	142.37	133.07	134.25	129.08	132.83	130.27
γ 24.0	69.54	76.96	81.14	84.26	80.86	78.31	131.44	122.39	123.52	117.45	121.49	118.74
γ 25.0	61.26	68.08	72.41	75.53	71.78	69.97	120.36	110.85	113.06	106.17	110.27	107.11
γ 26.0	54.06	60.39	64.79	67.89	63.77	62.85	108.79	99.75	102.02	95.18	98.71	96.03
γ 27.0	48.47	54.06	58.11	60.71	56.64	56.37	97.64	88.87	91.19	84.64	87.95	85.11
γ 28.0	43.38	48.09	52.23	54.35	50.68	50.71	86.64	79.25	81.06	75.69	77.38	74.65
γ 29.0	39.10	43.24	46.96	48.64	45.28	45.59	77.18	70.96	71.98	67.32	68.39	65.57
γ 30.0	35.03	38.69	41.99	43.52	40.50	41.06	68.96	63.54	64.55	60.11	60.44	58.09
γ 31.0	31.60	34.50	37.62	38.80	36.36	36.74	61.59	56.76	57.67	54.05	54.13	51.56
γ 32.0	28.43	31.01	33.85	34.43	32.43	32.86	55.17	51.06	51.88	48.60	48.46	46.05
γ 33.0	25.09	27.56	30.40	30.70	29.05	29.17	49.65	45.91	46.59	43.75	43.42	41.40
γ 34.0	22.29	24.31	26.83	26.91	25.67	25.79	44.96	41.32	41.75	39.33	39.20	37.26
γ 35.0	19.57	21.34	23.62	23.67	22.47	22.50	40.44	36.78	37.27	35.01	34.86	33.62
γ 36.0	17.12	18.70	20.81	20.48	19.66	19.51	36.25	32.97	33.32	31.34	31.44	30.12
γ 37.0	14.68	16.10	17.99	17.83	17.05	16.91	32.80	29.31	29.54	27.72	27.93	26.78
γ 38.0	12.26	13.51	15.14	15.19	14.31	14.05	29.33	25.86	25.91	24.36	24.51	23.81
γ 39.0	10.55	11.24	12.89	12.35	11.81	11.54	25.98	22.56	22.83	21.03	21.68	20.86
γ 40.0	8.52	9.36	10.53	10.24	9.94	9.64	22.70	19.50	19.59	18.10	18.99	18.09
γ 41.0	6.77	7.51	8.74	8.19	7.90	7.73	19.87	16.73	16.80	15.53	16.47	15.36
γ 42.0	5.10	5.75	6.70	6.49	6.18	5.97	17.41	14.08	14.23	12.92	13.97	13.06
γ 43.0	3.89	4.37	5.23	4.84	4.69	4.48	14.42	11.57	11.80	10.57	11.77	10.97
γ 44.0	2.68	3.14	4.00	3.48	3.43	3.23	12.07	9.48	9.60	8.59	9.92	8.79
γ 45.0	1.70	2.02	2.78	2.44	2.19	2.13	9.90	7.49	7.69	6.77	7.66	6.95
γ 46.0	0.79	1.03	1.66	1.38	1.31	1.07	8.07	5.68	5.81	4.96	6.08	5.24

**Photometric Filename:GL-1004-0300-O-ETL-30D-3000K-不帶遮光罩.IES**

V/H	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0	C300.0	C330.0
γ 47.0	0.00	0.21	0.83	0.37	0.37	0.19	6.16	4.12	4.38	3.66	4.56	4.01
γ 48.0	0.00	0.00	0.05	0.00	0.00	0.00	4.75	2.87	3.04	2.44	3.36	2.72
γ 49.0	0.00	0.00	0.00	0.00	0.00	0.00	3.47	1.77	1.93	1.43	2.25	1.64
γ 50.0	0.00	0.00	0.00	0.00	0.00	0.00	2.22	0.72	0.84	0.45	1.23	0.83
γ 51.0	0.00	0.00	0.00	0.00	0.00	0.00	1.21	0.00	0.00	0.00	0.30	0.00
γ 52.0	0.00	0.00	0.00	0.00	0.00	0.00	0.30	0.00	0.00	0.00	0.00	0.00
γ 53.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 54.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 55.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 56.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 57.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 58.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 59.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 61.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 62.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 63.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 64.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 65.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 66.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 67.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 68.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 69.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 71.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 72.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 73.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 74.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 75.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 76.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 77.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 78.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 79.0	0.00	0.00										



**Photometric Filename:GL-1004-0300-O-ETL-30D-3000K-不帶遮光罩.IES**

[illegible]

**Photometric Filename:GL-1004-0300-O-ETL-30D-3000K-不帶遮光罩.IES**

[illegible]