



Indoor Luminaire Photometric Data

Description Information

Luminary Name: 55252		Lum. Catalog:	Test ID:
Lamp Name:		Lamp Catalog:	Test Date: 2025/04/01
Manufacture:		Shld. Ang(°):	Test Machine:GON-2000
Test Lab:		Frequency (Hz):	Lamp CCT(K): 3000 Ra: 82.3
Lum. Size(W*L*H):0.050m*-0.050m*0.000m		Lum. Area(m2):0.002	Lum. W(kg): 0.000
Test System: C, γ	Test Step: C=30.0 γ=1.0	Temp.(°C): 25	Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 1193.640	Luminary Flux(lm): 1193.639	Field Angle(10%Imax): 30.6(°)	
Rated Power(W): 15	Luminary Efficiency: 100.00%	Down Lumens&Percent: 1193.639lm 100.00%	
Rated Voltage(V): 220	Luminary EER(lm/W): 79.682	Up Lumens&Percent: 0.000lm 0.00%	
Tested Power(W): 14.980	Max. Candela(cd): 9033.559	S/MH: C0_a180=0.229 C90_270=0.205	
Lamps' Inside: 1	Max Cand@Ang.(°): C=0.0 γ=1.0	CIE Type: Semi-Direct	
Tested Electrics(V, A, pf):229.3, 0.068, 0.952	Beam Angle(50%Imax): 12.4(°)	ErP Φ use(90°): 1050.063lm	
Lamp Size(W*L*H):0.050m*-0.050m*0.000m	Left=-5.7°, Right=6.7°	IRF(%): 1433.076	

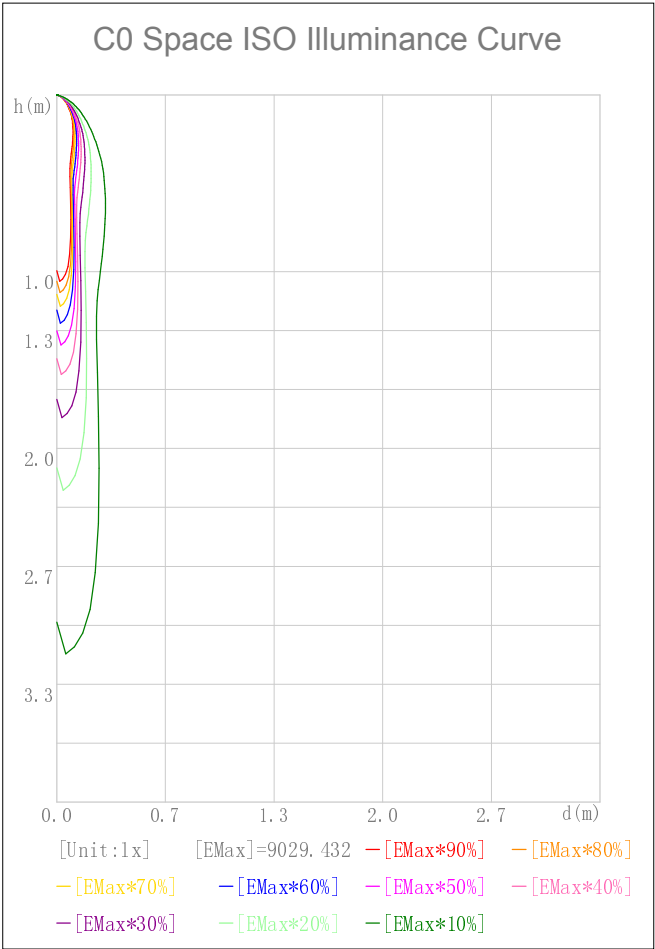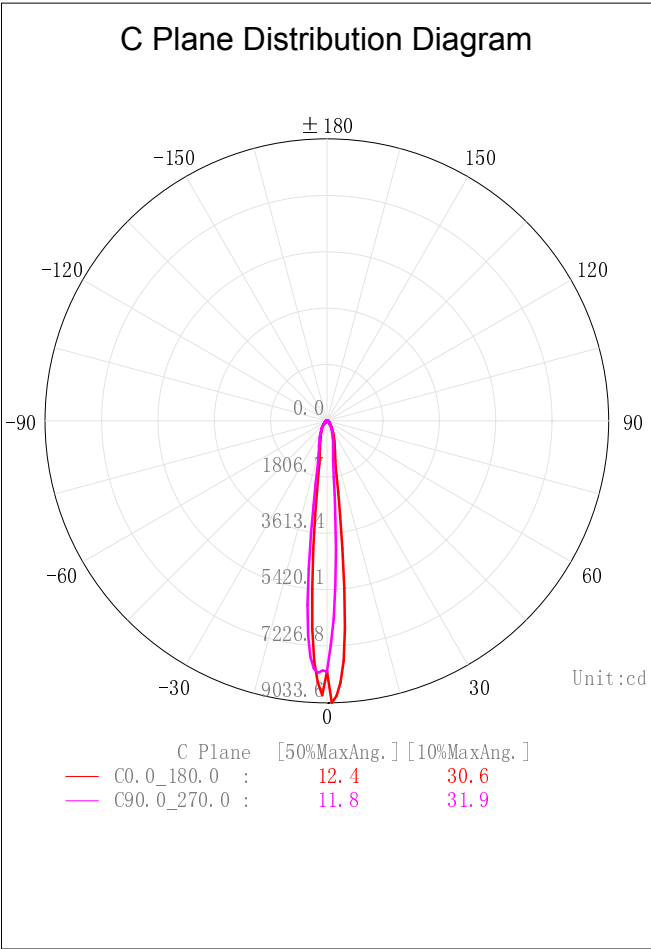

2D Plane Light Intensity Distribution Curve


Lum. Name:55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/04/01

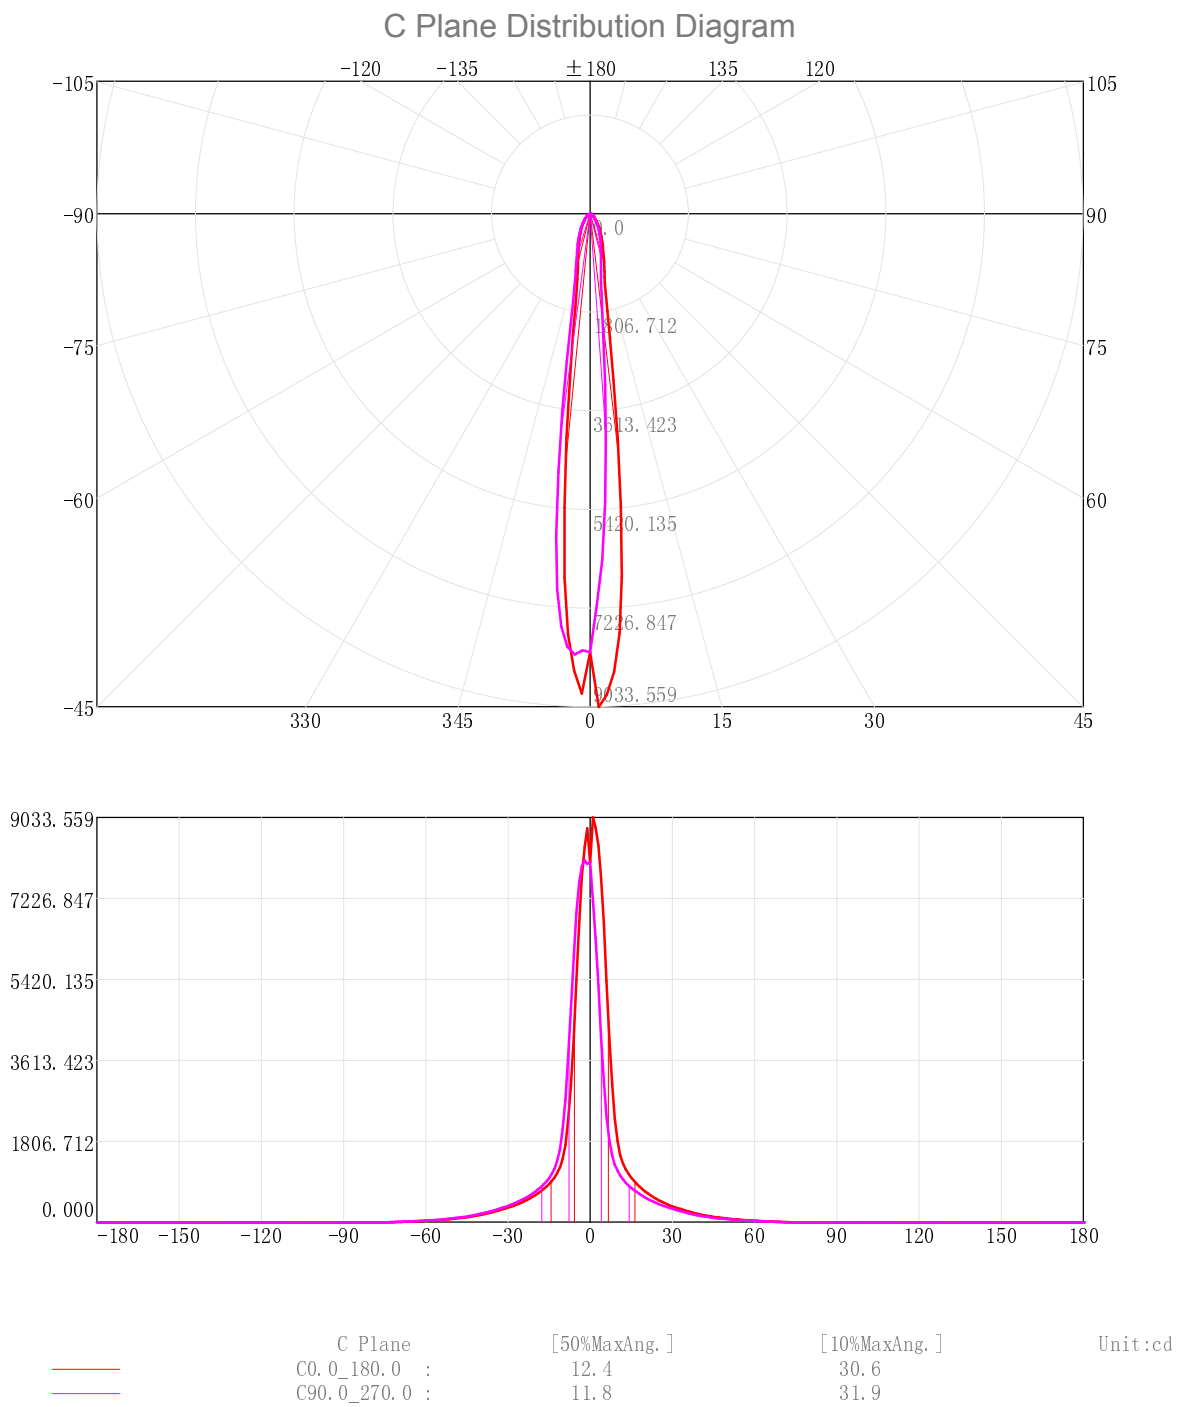

3D Light Intensity Distribution Modal

Lum. Name:55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/04/01

3D Light Intensity Distribution Modal

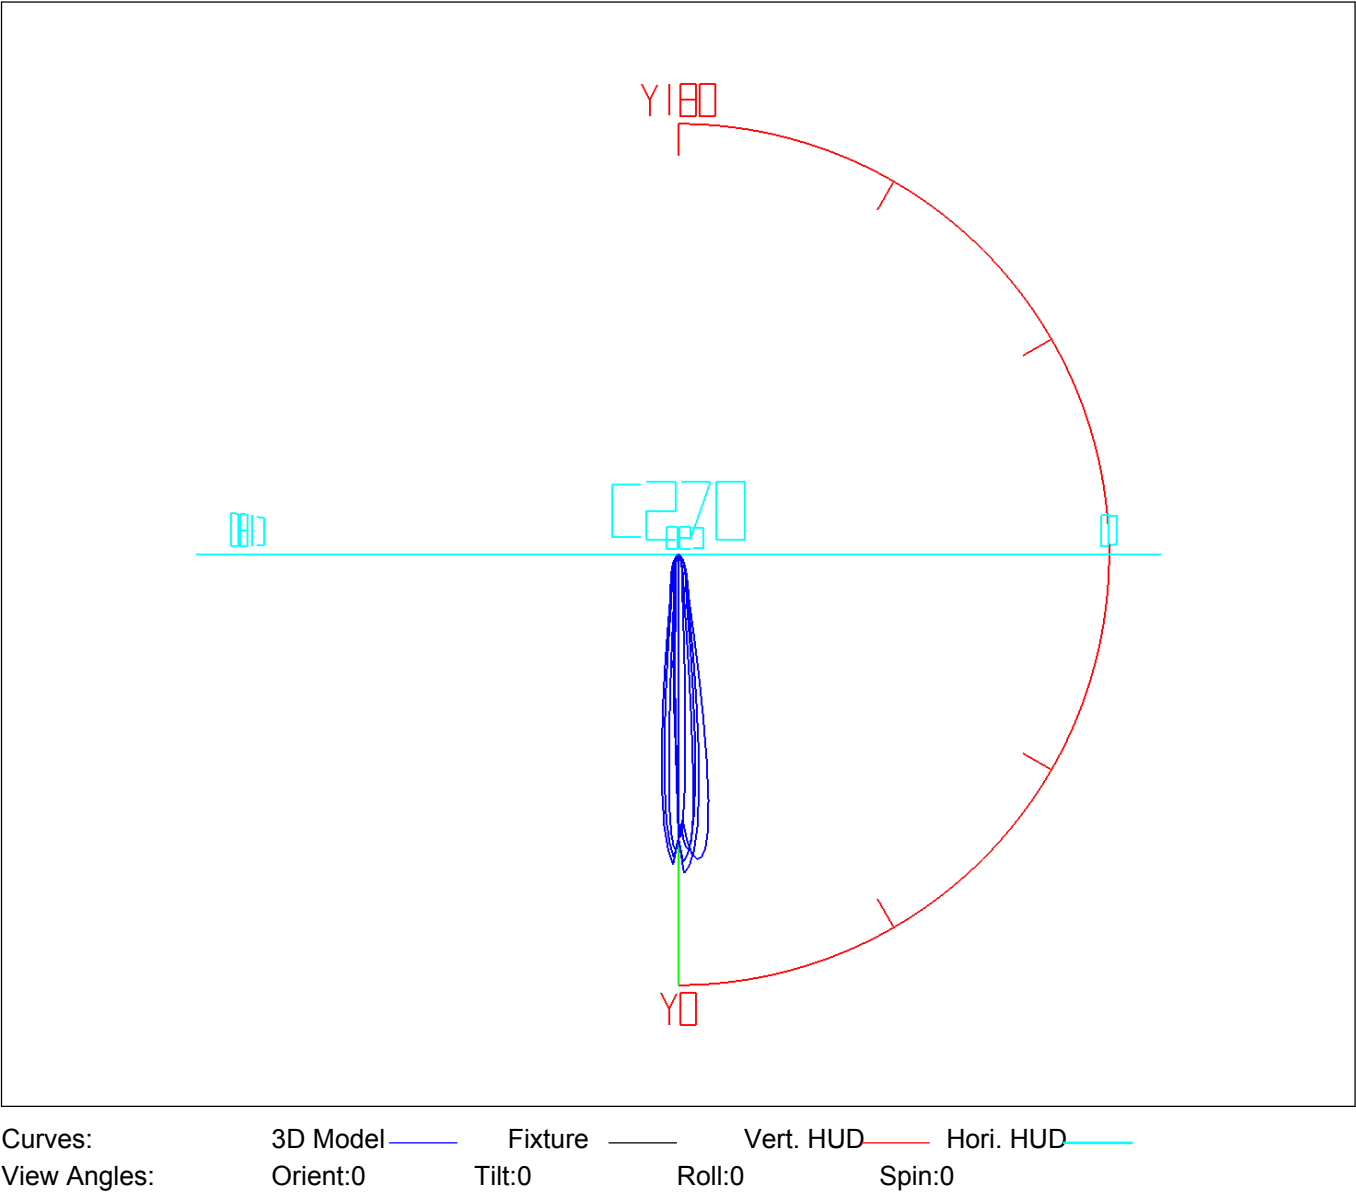

**Photometric Filename:GL-15W-COB-1500-MH-15D-3000K-老化前.IES**

Zone(γ)	Zone Flux (1m)	Sums Flux (1m)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (1m)	Sums Flux (1m)	Zone%Lamp	Sums%Lamp
0.0-1.0	7.56	7.56	0.63	0.63	47.0-48.0	7.91	1107.79	0.66	92.81
1.0-2.0	21.79	29.35	1.83	2.46	48.0-49.0	7.45	1115.24	0.62	93.43
2.0-3.0	34.30	63.65	2.87	5.33	49.0-50.0	7.00	1122.24	0.59	94.02
3.0-4.0	43.96	107.61	3.68	9.02	50.0-51.0	6.57	1128.81	0.55	94.57
4.0-5.0	49.88	157.49	4.18	13.19	51.0-52.0	6.15	1134.97	0.52	95.08
5.0-6.0	51.91	209.40	4.35	17.54	52.0-53.0	5.76	1140.72	0.48	95.57
6.0-7.0	50.66	260.07	4.24	21.79	53.0-54.0	5.38	1146.10	0.45	96.02
7.0-8.0	47.21	307.28	3.96	25.74	54.0-55.0	5.02	1151.12	0.42	96.44
8.0-9.0	42.64	349.91	3.57	29.31	55.0-56.0	4.68	1155.80	0.39	96.83
9.0-10.0	37.94	387.86	3.18	32.49	56.0-57.0	4.36	1160.15	0.36	97.19
10.0-11.0	33.93	421.79	2.84	35.34	57.0-58.0	4.05	1164.20	0.34	97.53
11.0-12.0	30.89	452.68	2.59	37.92	58.0-59.0	3.75	1167.94	0.31	97.85
12.0-13.0	28.74	481.42	2.41	40.33	59.0-60.0	3.45	1171.40	0.29	98.14
13.0-14.0	27.33	508.76	2.29	42.62	60.0-61.0	3.17	1174.57	0.27	98.40
14.0-15.0	26.46	535.21	2.22	44.84	61.0-62.0	2.89	1177.45	0.24	98.64
15.0-16.0	25.90	561.11	2.17	47.01	62.0-63.0	2.62	1180.07	0.22	98.86
16.0-17.0	25.48	586.59	2.13	49.14	63.0-64.0	2.35	1182.43	0.20	99.06
17.0-18.0	25.09	611.68	2.10	51.25	64.0-65.0	2.10	1184.53	0.18	99.24
18.0-19.0	24.69	636.37	2.07	53.31	65.0-66.0	1.85	1186.38	0.16	99.39
19.0-20.0	24.27	660.64	2.03	55.35	66.0-67.0	1.61	1187.99	0.14	99.53
20.0-21.0	23.81	684.45	2.00	57.34	67.0-68.0	1.38	1189.37	0.12	99.64
21.0-22.0	23.33	707.78	1.95	59.30	68.0-69.0	1.15	1190.52	0.10	99.74
22.0-23.0	22.83	730.61	1.91	61.21	69.0-70.0	0.94	1191.46	0.08	99.82
23.0-24.0	22.30	752.91	1.87	63.08	70.0-71.0	0.73	1192.19	0.06	99.88
24.0-25.0	21.77	774.68	1.82	64.90	71.0-72.0	0.55	1192.75	0.05	99.93
25.0-26.0	21.22	795.90	1.78	66.68	72.0-73.0	0.39	1193.14	0.03	99.96
26.0-27.0	20.67	816.57	1.73	68.41	73.0-74.0	0.25	1193.38	0.02	99.98
27.0-28.0	20.10	836.67	1.68	70.09	74.0-75.0	0.14	1193.52	0.01	99.99
28.0-29.0	19.53	856.19	1.64	71.73	75.0-76.0	0.07	1193.59	0.01	100.00
29.0-30.0	18.95	875.15	1.59	73.32	76.0-77.0	0.04	1193.63	0.00	100.00
30.0-31.0	18.36	893.51	1.54	74.86	77.0-78.0	0.01	1193.64	0.00	100.00
31.0-32.0	17.75	911.26	1.49	76.34	78.0-79.0	0.00	1193.64	0.00	100.00
32.0-33.0	17.12	928.37	1.43	77.78	79.0-80.0	0.00	1193.64	0.00	100.00
33.0-34.0	16.47	944.84	1.38	79.16	80.0-81.0	0.00	1193.64	0.00	100.00
34.0-35.0	15.81	960.66	1.32	80.48	81.0-82.0	0.00	1193.64	0.00	100.00
35.0-36.0	15.15	975.80	1.27	81.75	82.0-83.0	0.00	1193.64		

IES Indoor Report


Photometric Filename:GL-15W-COB-1500-MH-15D-3000K-老化前.IES

Zonal Flux Tabulation - (Cont.)

Zone( γ )	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone( γ )	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.00	1193.64	0.00	100.00	141.0-142.0	0.00	1193.64	0.00	100.00
95.0-96.0	0.00	1193.64	0.00	100.00	142.0-143.0	0.00	1193.64	0.00	100.00
96.0-97.0	0.00	1193.64	0.00	100.00	143.0-144.0	0.00	1193.64	0.00	100.00
97.0-98.0	0.00	1193.64	0.00	100.00	144.0-145.0	0.00	1193.64	0.00	100.00
98.0-99.0	0.00	1193.64	0.00	100.00	145.0-146.0	0.00	1193.64	0.00	100.00
99.0-100.0	0.00	1193.64	0.00	100.00	146.0-147.0	0.00	1193.64	0.00	100.00
100.0-101.0	0.00	1193.64	0.00	100.00	147.0-148.0	0.00	1193.64	0.00	100.00
101.0-102.0	0.00	1193.64	0.00	100.00	148.0-149.0	0.00	1193.64	0.00	100.00
102.0-103.0	0.00	1193.64	0.00	100.00	149.0-150.0	0.00	1193.64	0.00	100.00
103.0-104.0	0.00	1193.64	0.00	100.00	150.0-151.0	0.00	1193.64	0.00	100.00
104.0-105.0	0.00	1193.64	0.00	100.00	151.0-152.0	0.00	1193.64	0.00	100.00
105.0-106.0	0.00	1193.64	0.00	100.00	152.0-153.0	0.00	1193.64	0.00	100.00
106.0-107.0	0.00	1193.64	0.00	100.00	153.0-154.0	0.00	1193.64	0.00	100.00
107.0-108.0	0.00	1193.64	0.00	100.00	154.0-155.0	0.00	1193.64	0.00	100.00
108.0-109.0	0.00	1193.64	0.00	100.00	155.0-156.0	0.00	1193.64	0.00	100.00
109.0-110.0	0.00	1193.64	0.00	100.00	156.0-157.0	0.00	1193.64	0.00	100.00
110.0-111.0	0.00	1193.64	0.00	100.00	157.0-158.0	0.00	1193.64	0.00	100.00
111.0-112.0	0.00	1193.64	0.00	100.00	158.0-159.0	0.00	1193.64	0.00	100.00
112.0-113.0	0.00	1193.64	0.00	100.00	159.0-160.0	0.00	1193.64	0.00	100.00
113.0-114.0	0.00	1193.64	0.00	100.00	160.0-161.0	0.00	1193.64	0.00	100.00
114.0-115.0	0.00	1193.64	0.00	100.00	161.0-162.0	0.00	1193.64	0.00	100.00
115.0-116.0	0.00	1193.64	0.00	100.00	162.0-163.0	0.00	1193.64	0.00	100.00
116.0-117.0	0.00	1193.64	0.00	100.00	163.0-164.0	0.00	1193.64	0.00	100.00
117.0-118.0	0.00	1193.64	0.00	100.00	164.0-165.0	0.00	1193.64	0.00	100.00
118.0-119.0	0.00	1193.64	0.00	100.00	165.0-166.0	0.00	1193.64	0.00	100.00
119.0-120.0	0.00	1193.64	0.00	100.00	166.0-167.0	0.00	1193.64	0.00	100.00
120.0-121.0	0.00	1193.64	0.00	100.00	167.0-168.0	0.00	1193.64	0.00	100.00
121.0-122.0	0.00	1193.64	0.00	100.00	168.0-169.0	0.00	1193.64	0.00	100.00
122.0-123.0	0.00	1193.64	0.00	100.00	169.0-170.0	0.00	1193.64	0.00	100.00
123.0-124.0	0.00	1193.64	0.00	100.00	170.0-171.0	0.00	1193.64	0.00	100.00
124.0-125.0	0.00	1193.64	0.00	100.00	171.0-172.0	0.00	1193.64	0.00	100.00
125.0-126.0	0.00	1193.64	0.00	100.00	172.0-173.0	0.00	1193.64	0.00	100.00
126.0-127.0	0.00	1193.64	0.00	100.00	173.0-174.0	0.00	1193.64	0.00	100.00
127.0-128.0	0.00	1193.64	0.00	100.00	174.0-175.0	0.00	1193.64	0.00	100.00
128.0-129.0	0.00	1193.64	0.00	100.00	175.0-176.0	0.00	1193.64	0.00	100.00
129.0-130.0	0.00	1193.64	0.00	100.00	176.0-177.0	0.00	1193.64	0.00	100.00
130.0-131.0	0.00	1193.64	0.00	100.00	177.0-178.0	0.00	1193.64	0.00	100.00
131.0-132.0	0.00	1193.64	0.00	100.00	178.0-179.0	0.00	1193.64	0.00	100.00
132.0-133.0	0.00	1193.64	0.00	100.00	179.0-180.0	0.00	1193.64	0.00	100.00
133.0-134.0	0.00	1193.64	0.00	100.00					
134.0-135.0	0.00	1193.64	0.00	100.00					
135.0-136.0	0.00	1193.64	0.00	100.00					
136.0-137.0	0.00	1193.64	0.00	100.00					
137.0-138.0	0.00	1193.64	0.00	100.00					
138.0-139.0	0.00	1193.64	0.00	100.00					
139.0-140.0	0.00	1193.64	0.00	100.00					
140.0-141.0	0.00	1193.64	0.00	100.00					

Rectangle ISO Lighting Intensity Diagram

Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/04/01

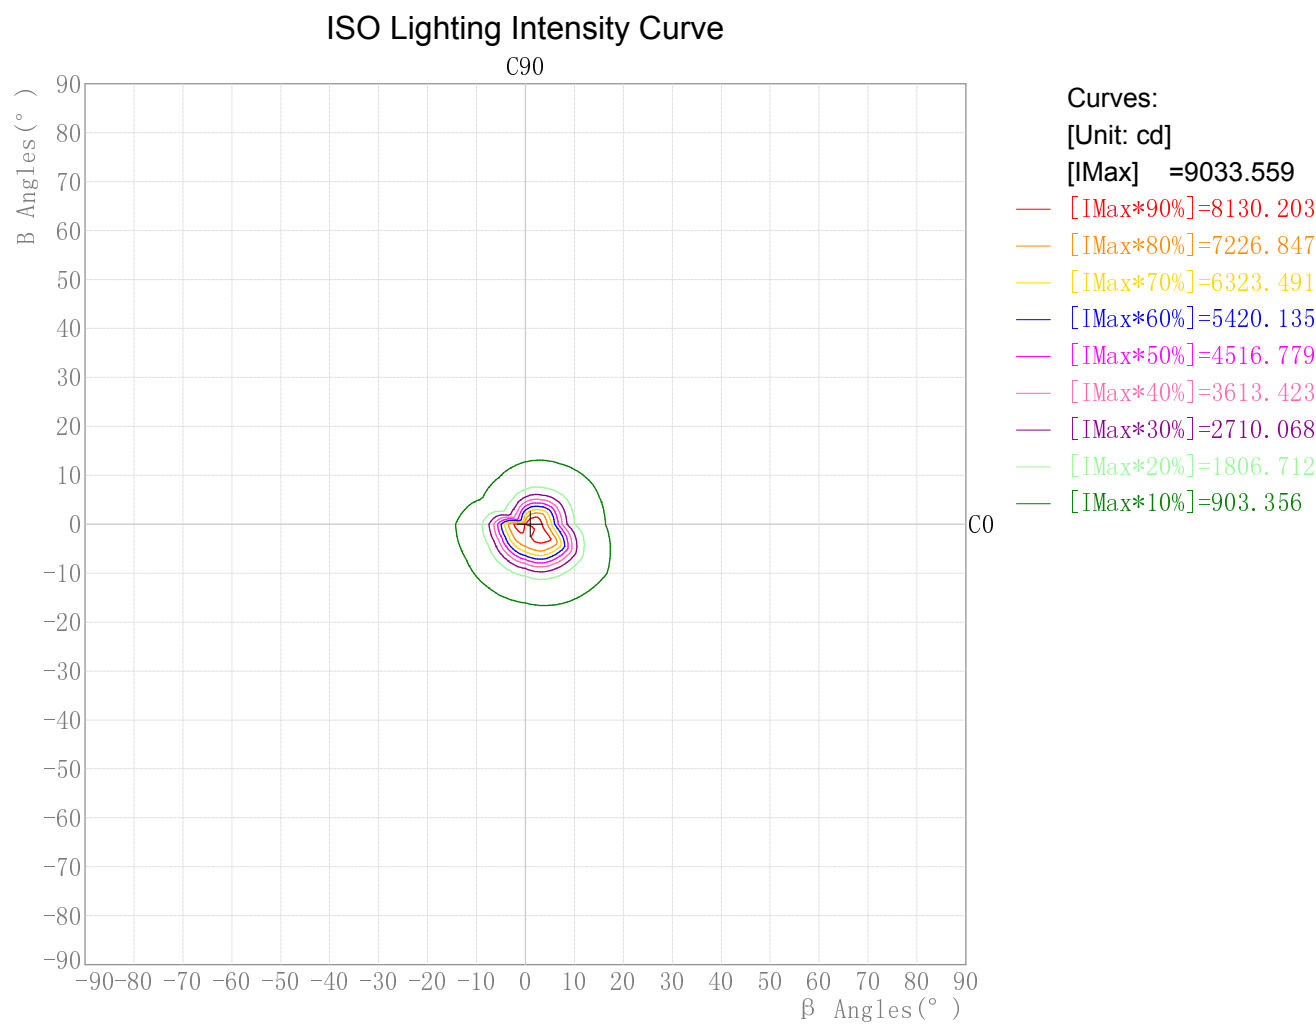

Maximum Light Intensity(cd): 9033.56


Maximum Cand.@Angle: H=1.0°,V=0.0°

**Photometric Filename:GL-15W-COB-1500-MH-15D-3000K-老化前.IES**

## Plane ISO-Illuminance Diagram

Lum. Name: 55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/04/01

### Plane ISO-Illuminance Curve

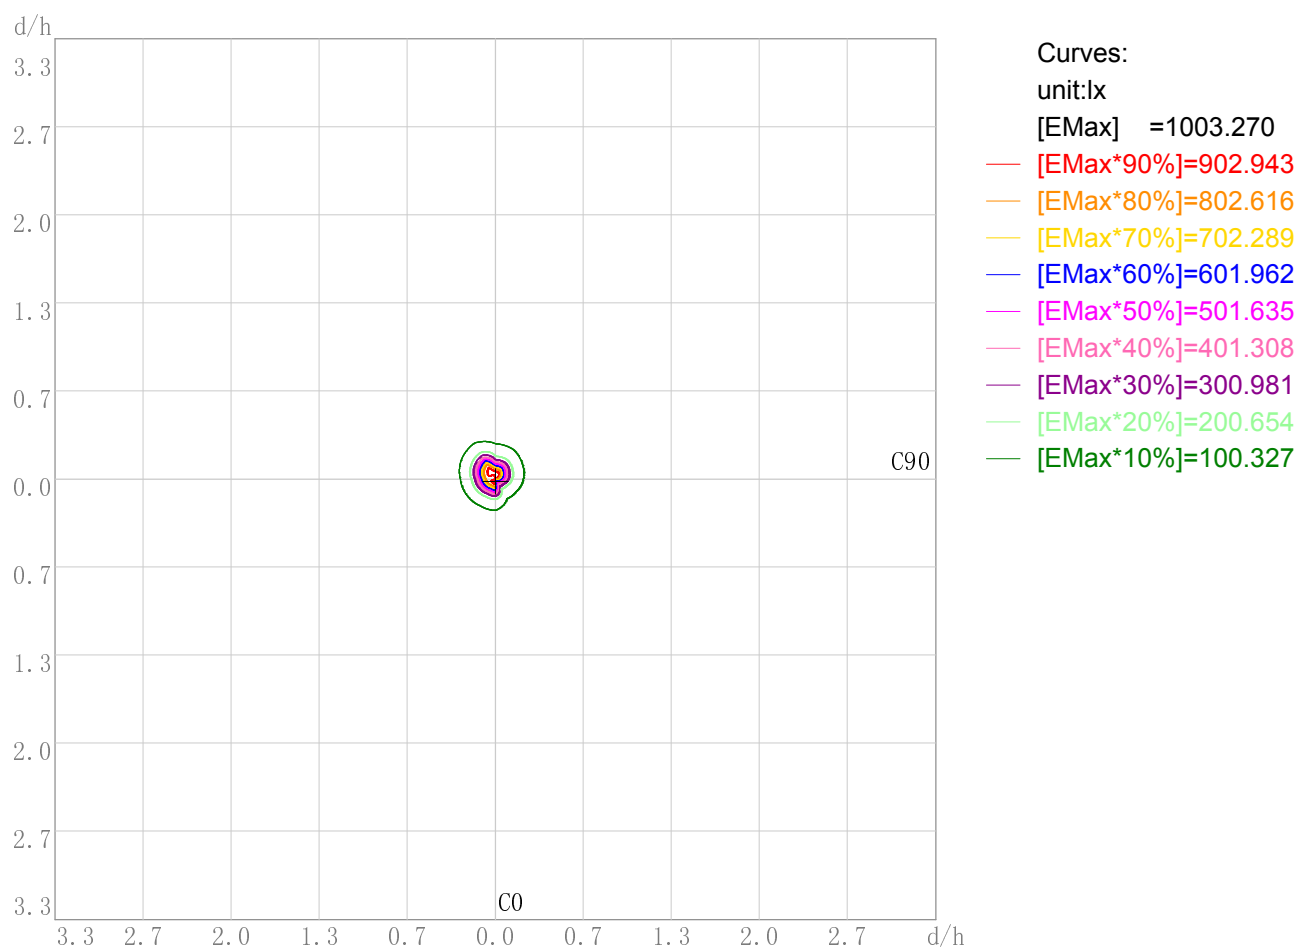

Working Plane Luminaire Mounting Height(m): 3.00


Working Plane Maximum Illuminance(lx): 1003.27

Working Plane Maximum Illuminance Position(d/h):H0.0 V0.0

3D Plane ISO Illuminance Diagram

Lum. Name: 55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/04/01

3D Plane Illuminance Modal

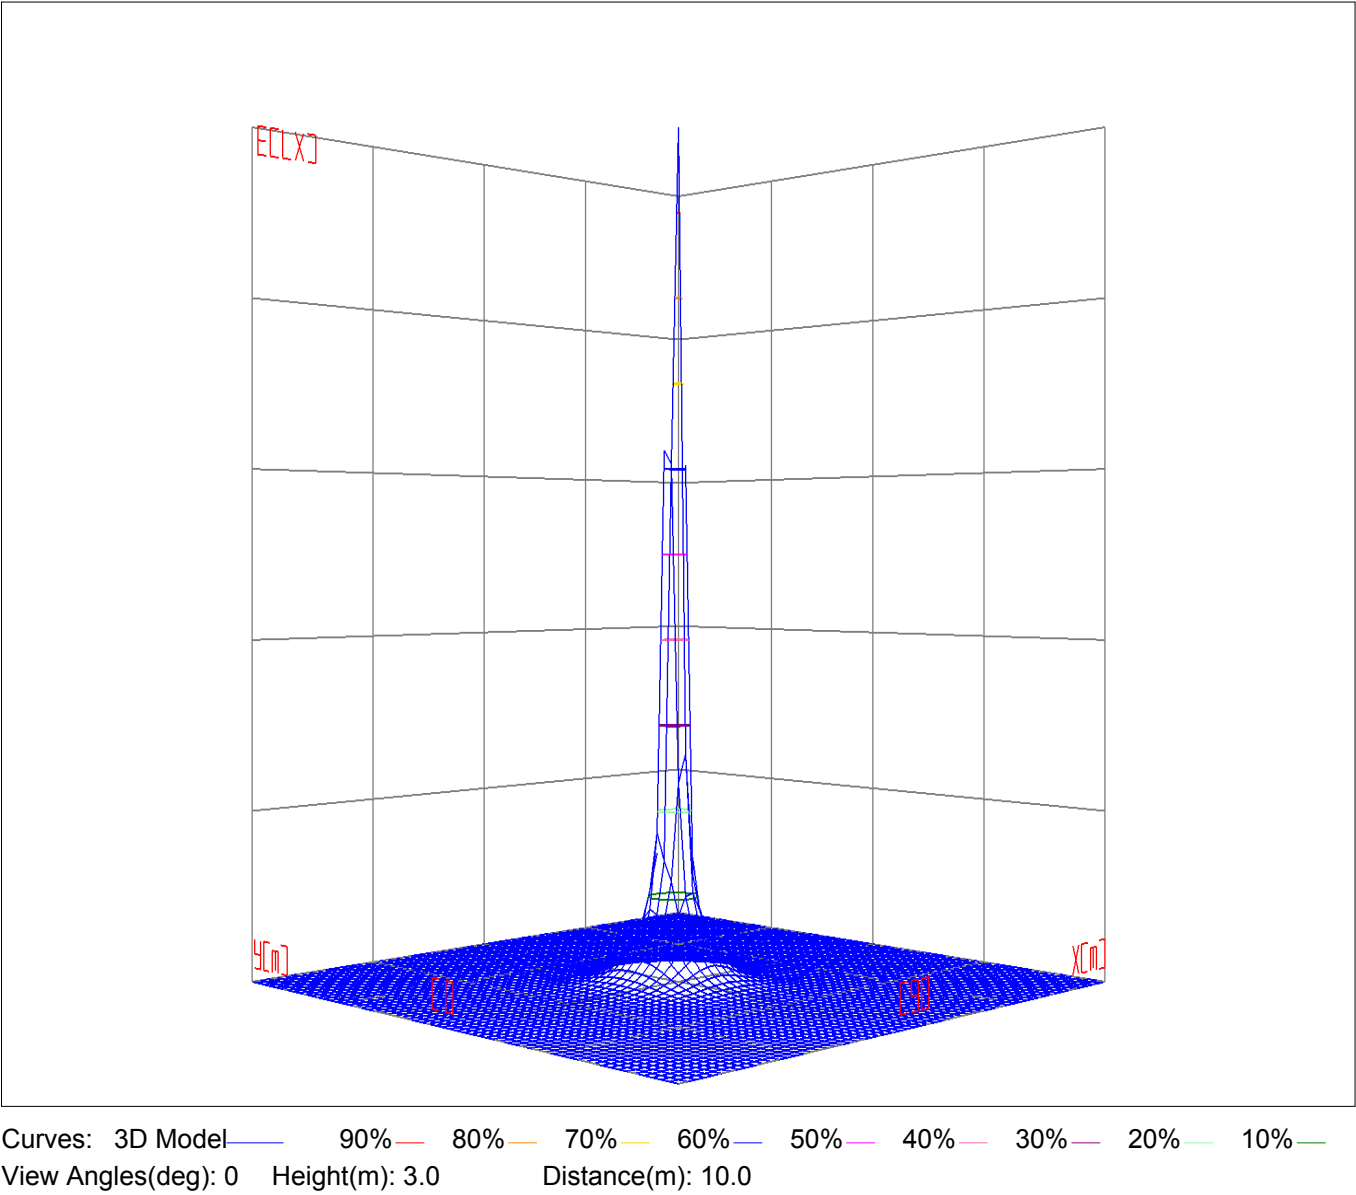




Space ISO Illuminance Diagram

Lum. Name:55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/04/01

Space ISO Illuminance Curve

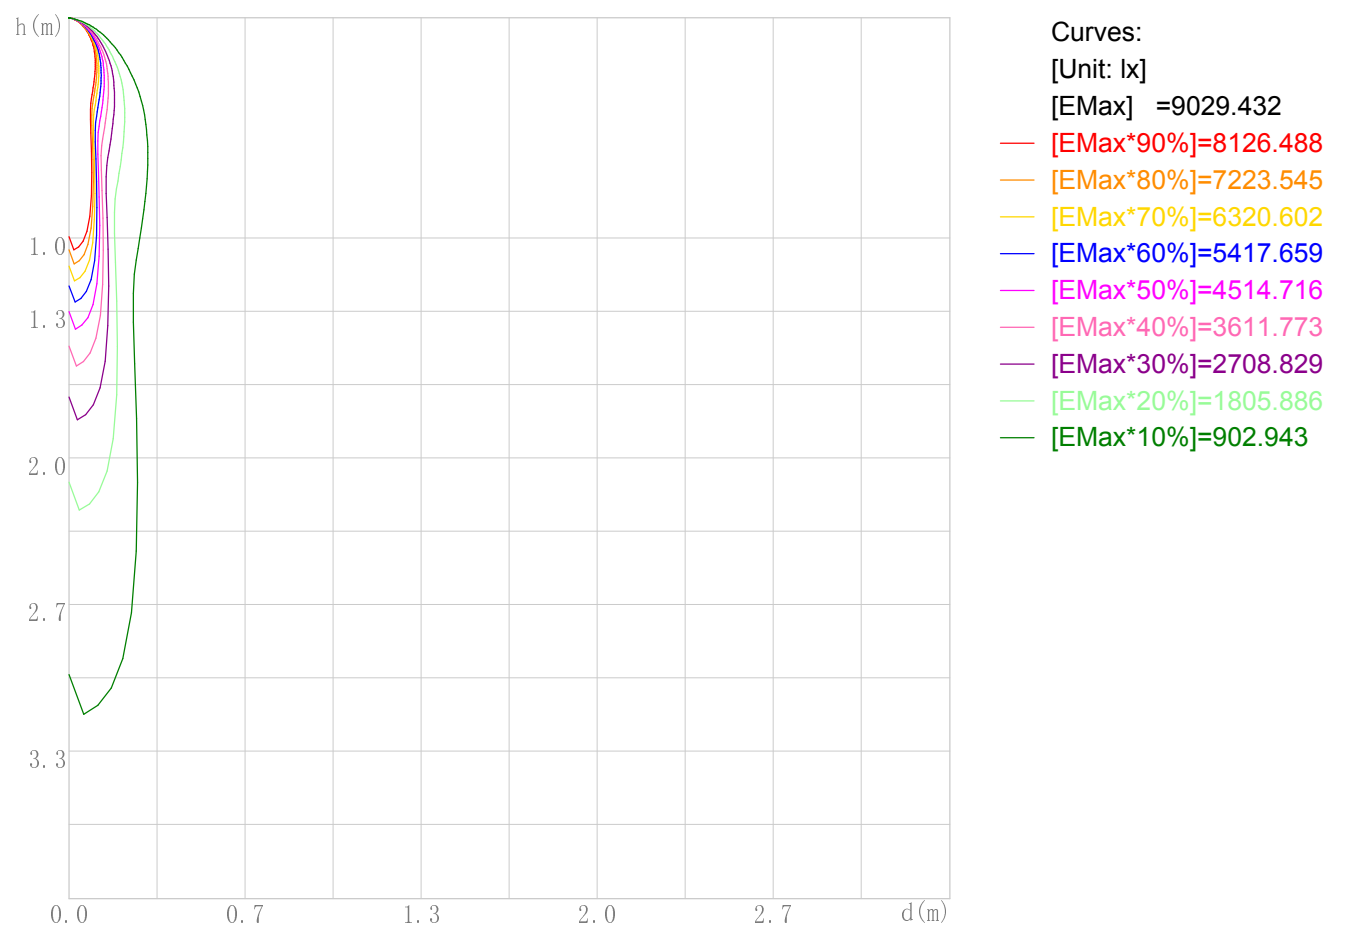


Space Plane Maximum Illuminance and @Angle:9029.43lx,1.0deg  
Plane Maximum Lighting Intensity and @Angle:9033.559cd,0eg

---

Illuminance-Distance Diagram

Lum. Name:55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/04/01

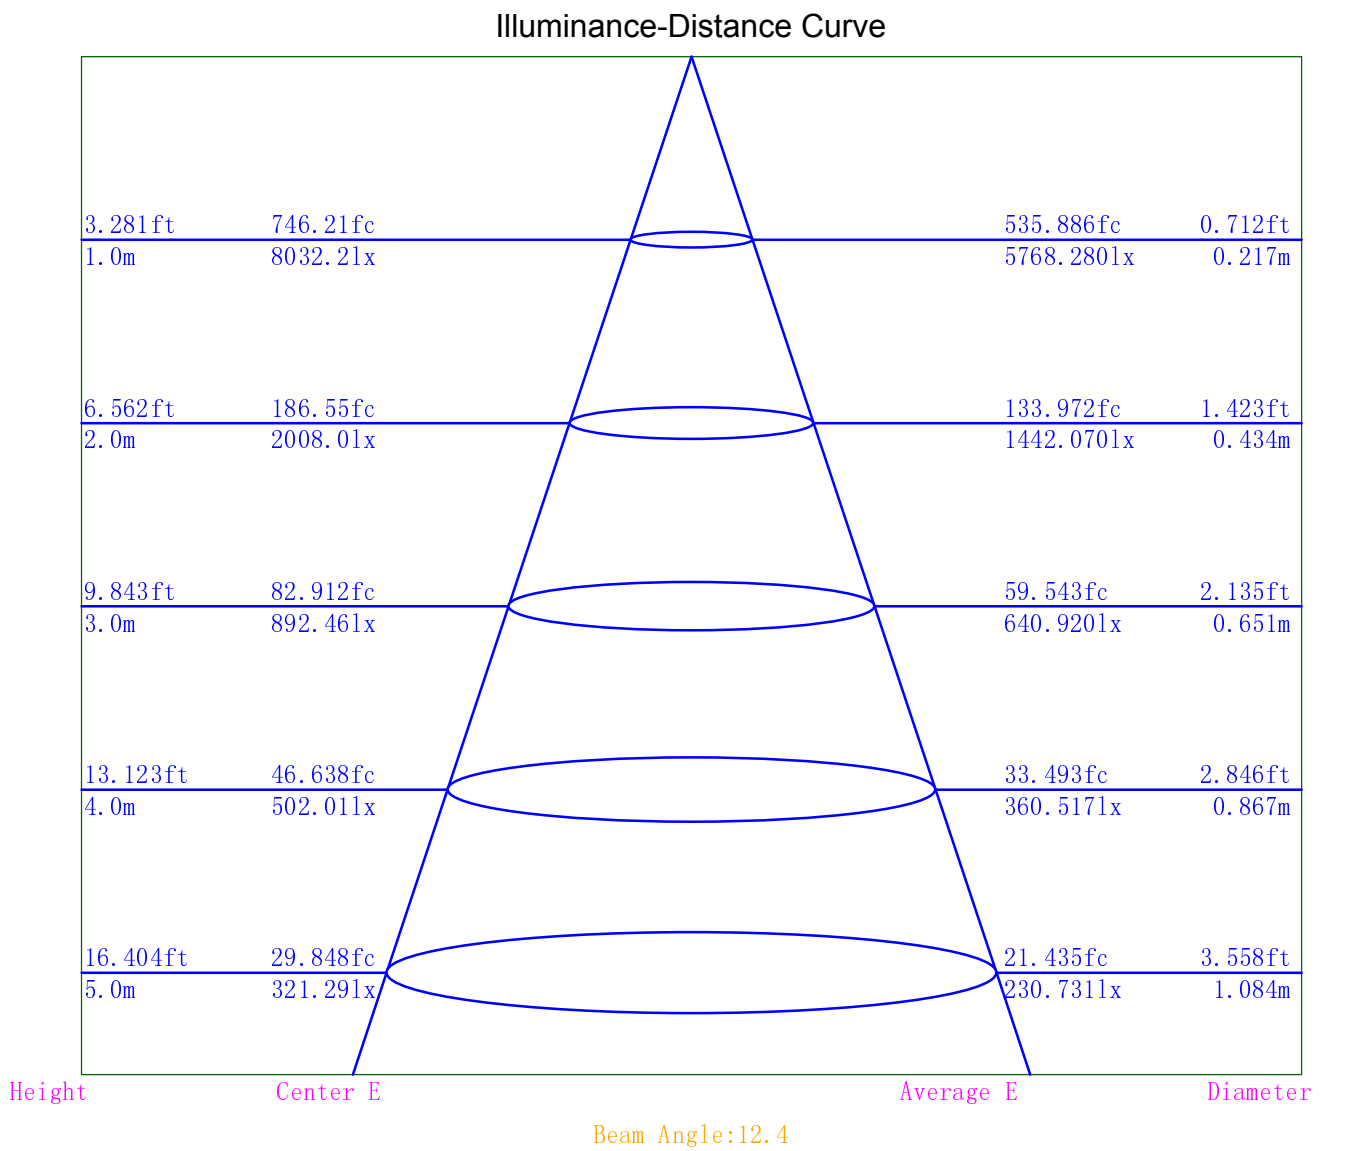

Indoor Luminance Limiting Curves

Lum. Name:55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/04/01


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama (deg)	45	50	55	60	65	70	75	80	85
C0	88985	67272	50093	37714	25769	13939	0	0	0
C90	73845	55379	41418	29882	18607	6778	0	0	0

Luminance Limiting Curve

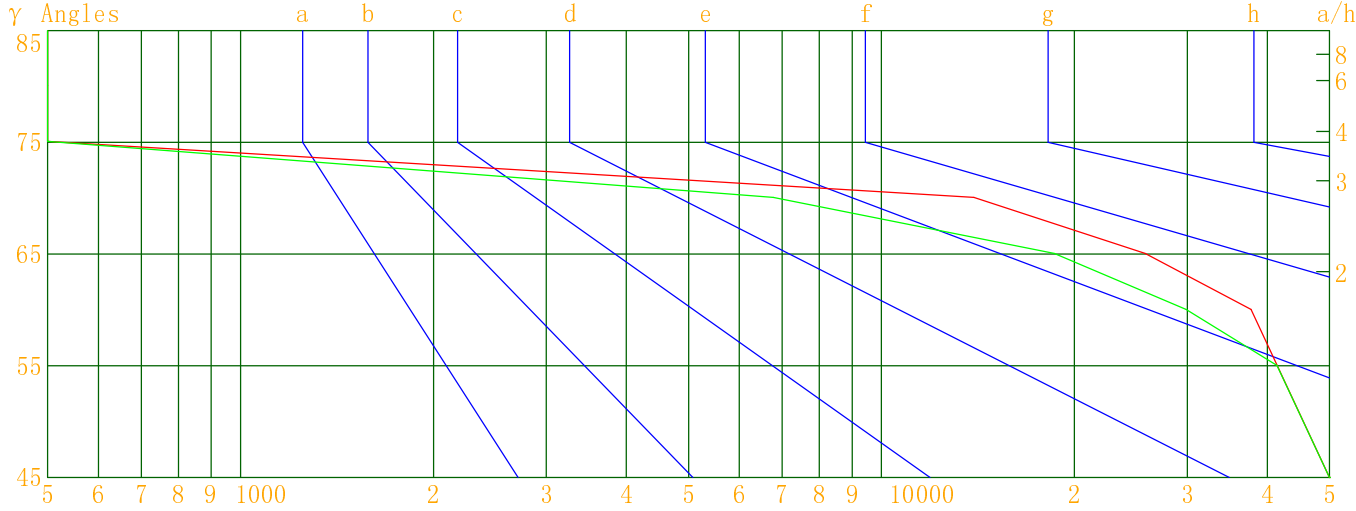


Luminous Size: Length(m)=-0.050 Width(m)=-0.050 Height(m)=0.000 Area(m^2)=0.001963

Luminous Type: Without Luminous Side

Luminous Curves: C0-C180 Color: C90-C270 Color:

Indoor Budgetary Estimate Table

Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/04/01

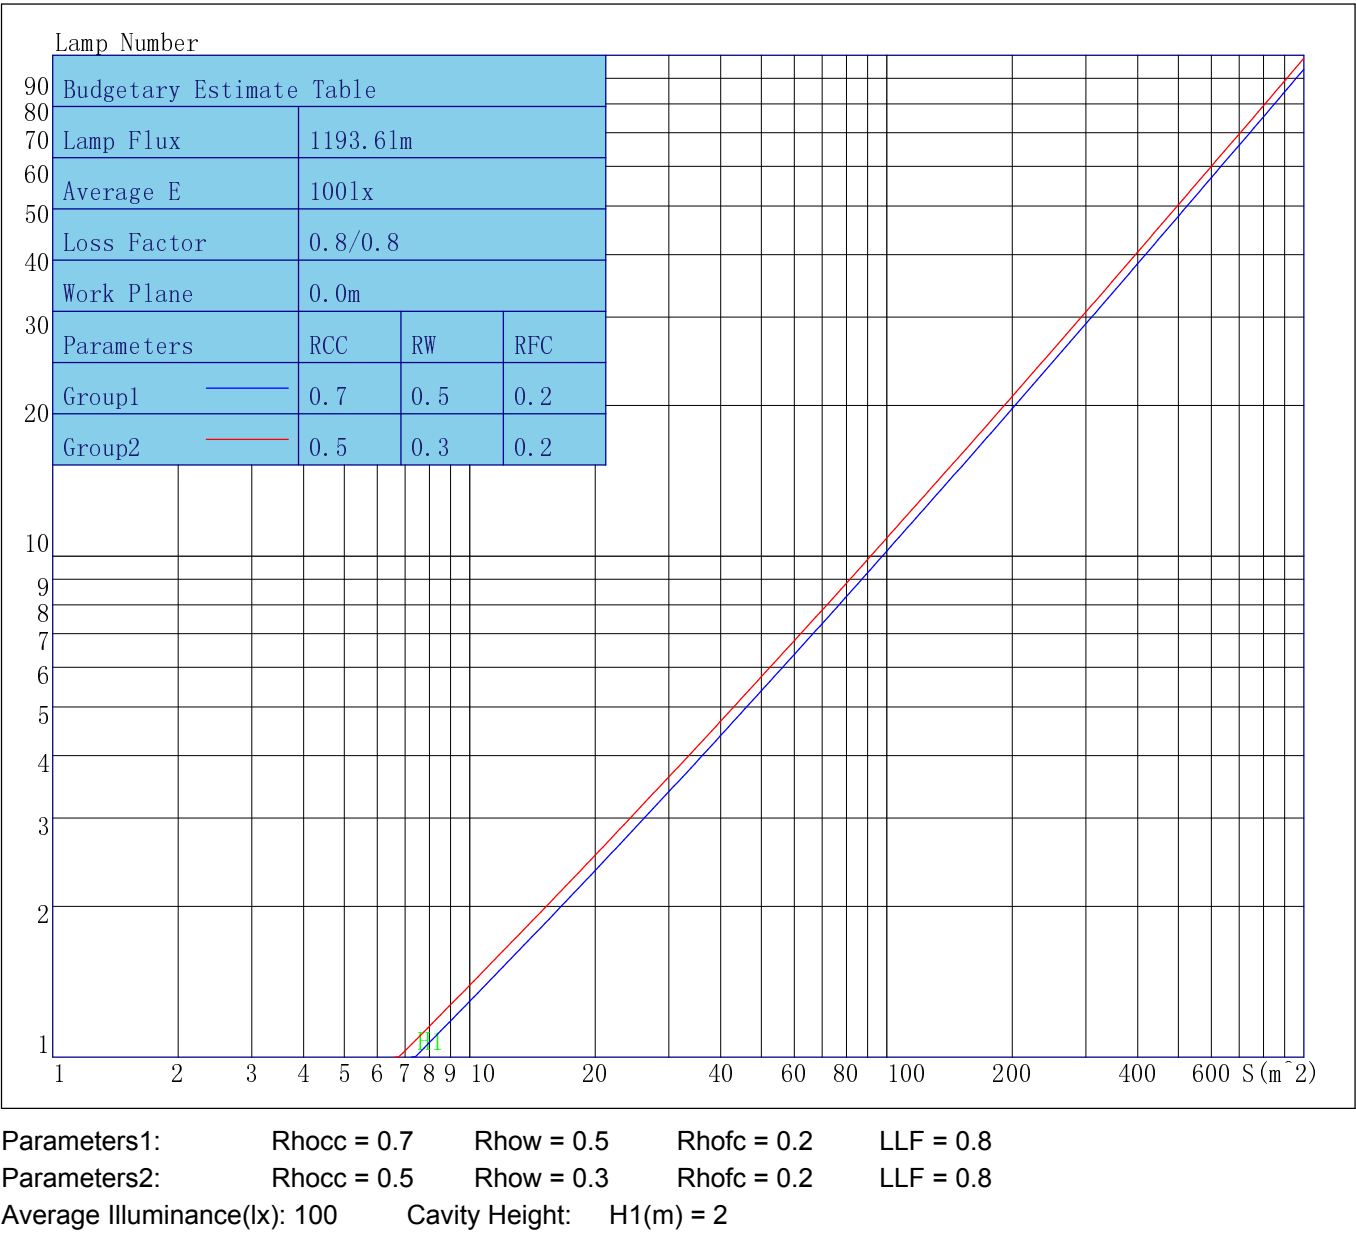

Indoor Coefficient of Utilization Table

Lum. Name:55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/04/01

Coefficients of Utilization – Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102	101	100	99	98	97	96	94
2	109	104	101	97	107	103	99	96	99	97	94	96	94	92	94	92	90	89
3	104	98	93	90	102	97	93	89	94	91	88	92	89	86	90	87	85	84
4	99	93	88	84	98	91	87	83	89	85	82	87	84	81	86	83	80	79
5	95	88	83	79	94	87	82	78	85	81	78	84	80	77	82	79	76	75
6	92	84	78	74	90	83	78	74	81	77	74	80	76	73	79	75	73	71
7	88	80	75	71	87	79	74	71	78	74	70	77	73	70	76	72	70	68
8	85	76	71	68	84	76	71	68	75	70	67	74	70	67	73	69	67	66
9	82	74	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63
10	79	71	66	63	78	70	66	62	70	65	62	69	65	62	68	65	62	61

Unified Glare Rating Table

Lum. Name:55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2025/04/01

Unified Glare Rating Table

Ceiling RCC		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size		Vewed crosswise					Vewed endwise				
X=2H	Y=2H	24.1	25.2	24.4	25.5	25.8	22.2	23.3	22.5	23.6	23.9
	Y=3H	24.1	25.1	24.5	25.5	25.8	22.1	23.1	22.5	23.4	23.8
	Y=4H	24.0	25.0	24.5	25.3	25.7	22.0	22.9	22.4	23.3	23.7
	Y=6H	23.9	24.8	24.4	25.2	25.6	21.9	22.8	22.3	23.1	23.5
	Y=8H	23.9	24.7	24.3	25.1	25.5	21.9	22.7	22.3	23.1	23.5
	Y=12H	23.8	24.6	24.3	25.0	25.4	21.8	22.6	22.2	23.0	23.4
X=4H	Y=2H	24.1	25.0	24.5	25.4	25.8	22.1	23.1	22.5	23.4	23.8
	Y=3H	24.2	25.0	24.6	25.4	25.8	22.1	22.9	22.5	23.3	23.7
	Y=4H	24.1	24.8	24.6	25.2	25.7	22.0	22.7	22.4	23.1	23.5
	Y=6H	24.0	24.6	24.5	25.1	25.5	21.9	22.5	22.3	22.9	23.4
	Y=8H	24.0	24.5	24.4	25.0	25.4	21.8	22.4	22.3	22.8	23.3
	Y=12H	23.9	24.4	24.4	24.9	25.3	21.8	22.2	22.2	22.7	23.2
X=8H	Y=4H	24.0	24.5	24.4	25.0	25.5	21.8	22.4	22.3	22.8	23.3
	Y=6H	23.9	24.3	24.4	24.8	25.3	21.7	22.2	22.2	22.7	23.2
	Y=8H	23.8	24.2	24.3	24.7	25.2	21.6	22.0	22.2	22.6	23.1
	Y=12H	23.7	24.1	24.2	24.6	25.2	21.6	21.9	22.1	22.4	23.0
X=12H	Y=4H	23.9	24.4	24.4	24.9	25.4	21.8	22.3	22.3	22.7	23.2
	Y=6H	23.8	24.2	24.3	24.7	25.2	21.6	22.0	22.2	22.5	23.1
	Y=8H	23.7	24.1	24.2	24.6	25.2	21.6	21.9	22.1	22.4	23.0
Variations with the objverver position at spacings											
S=1.0H		4.5/-30.8					0.0/0.0				
S=1.5H		4.8/-22.2					7.6/0.0				
S=2.0H		4.5/-17.1					6.0/0.0				
Reduced UGR Table:											
Nordic Standard Table:		BK0					BK0				
Correction Value		0.3					0.2				

o the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

IES Indoor Report

Photometric Filename:GL-15W-COB-1500-MH-15D-3000K-老化前.IES

Candela Tabulation

V/H	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0	C300.0	C330.0
γ 0.0	8032.18	8032.18	8032.18	8032.18	8032.18	8032.18	8032.18	8032.18	8032.18	8032.18	8032.18	8032.18
γ 1.0	9033.56	8744.81	8017.58	7166.05	5921.39	5431.97	8789.74	8569.43	8328.03	7998.17	7603.08	7502.49
γ 2.0	8813.58	8534.31	7534.85	6342.53	4791.29	4241.13	8369.52	8150.76	8165.58	8076.65	8012.03	8071.57
γ 3.0	8402.51	8116.73	6740.54	5283.92	3692.59	3185.88	7714.27	7498.89	7801.33	7944.18	8199.97	8424.79
γ 4.0	7705.35	7393.04	5664.75	4144.09	2760.10	2351.55	6681.44	6457.39	7121.15	7581.14	8184.48	8551.48
γ 5.0	6670.03	6346.35	4463.94	3144.11	2075.98	1785.50	5400.28	5189.42	6108.31	6902.48	7966.20	8491.21
γ 6.0	5384.99	5103.78	3396.95	2372.33	1626.37	1442.56	4127.44	3959.40	4901.30	5927.59	7496.96	8247.46
γ 7.0	4114.80	3899.92	2569.69	1836.55	1354.99	1238.18	3053.16	2934.75	3744.67	4766.11	6704.45	7744.68
γ 8.0	3079.18	2938.22	1983.48	1495.62	1188.69	1103.22	2254.42	2179.00	2791.85	3652.48	5611.27	6916.44
γ 9.0	2313.38	2229.17	1594.14	1286.34	1070.47	1001.09	1727.41	1677.31	2095.86	2740.97	4417.41	5785.59
γ 10.0	1808.02	1751.99	1351.66	1146.45	977.08	918.54	1415.06	1379.22	1638.18	2073.12	3368.23	4546.53
γ 11.0	1495.60	1453.41	1195.71	1039.77	898.81	848.73	1228.89	1200.05	1361.15	1636.96	2554.54	3461.31
γ 12.0	1307.44	1272.57	1081.44	954.65	832.29	787.99	1101.13	1077.75	1189.19	1367.89	1962.38	2602.44
γ 13.0	1182.38	1150.24	990.83	884.33	775.58	734.91	1002.37	983.47	1070.03	1199.19	1570.92	1983.27
γ 14.0	1085.75	1053.64	916.45	823.88	725.67	687.72	922.36	906.57	979.00	1079.89	1333.90	1581.75
γ 15.0	1001.79	970.61	852.16	770.05	680.40	644.49	854.28	841.20	903.45	986.12	1183.66	1341.77
γ 16.0	927.39	898.73	795.03	720.75	639.15	604.35	793.98	783.35	838.70	909.11	1073.65	1194.68
γ 17.0	859.70	835.39	743.40	675.38	600.47	567.03	740.85	731.59	781.67	843.69	984.90	1090.39
γ 18.0	798.26	778.94	695.86	633.47	564.24	532.69	692.31	684.06	729.85	785.67	907.14	1004.91
γ 19.0	742.90	727.55	652.03	594.72	530.59	500.45	647.47	640.16	682.49	733.71	840.33	929.48
γ 20.0	693.33	680.70	611.64	558.43	498.92	470.62	606.22	599.36	638.94	686.46	781.66	861.39
γ 21.0	647.76	637.31	573.65	524.31	469.42	442.83	568.15	561.37	598.79	643.31	728.59	799.56
γ 22.0	605.48	596.30	538.13	492.70	441.50	416.42	533.12	526.20	561.22	603.14	680.22	743.73
γ 23.0	566.77	558.01	504.86	463.14	415.14	391.73	500.39	493.84	526.65	565.69	636.45	693.64
γ 24.0	529.84	522.73	474.15	435.69	390.21	368.41	470.19	464.52	494.49	530.55	595.82	648.45
γ 25.0	496.15	489.83	445.32	410.02	367.00	347.57	441.98	436.52	465.20	498.25	557.71	606.99
γ 26.0	464.75	459.42	418.65	385.79	346.23	328.78	415.33	410.24	437.43	468.40	522.45	567.94
γ 27.0	435.46	431.14	393.38	362.97	327.50	310.79	390.63	385.81	411.46	440.45	490.09	531.07
γ 28.0	407.23	403.88	369.69	342.38	309.52	292.94	367.68	362.91	387.32	414.30	460.28	497.53
γ 29.0	380.91	378.67	348.16	323.19	291.68	275.26	347.18	342.82	364.53	389.86	432.01	466.54
γ 30.0	357.37	355.52	328.00	304.29	273.72	257.83	328.34	324.09	343.84	366.40	405.87	437.27
γ 31.0	336.06	334.26	308.15	285.85	255.68	240.74	309.41	305.18	324.64	345.30	380.82	409.17
γ 32.0	315.87	313.61	289.05	267.71	238.36	224.39	291.25	286.85	305.62	325.84	357.91	382.48
γ 33.0	296.82	293.88	270.34	249.78	221.99	208.83	273.43	268.71	287.13	306.83	337.39	358.29
γ 34.0	278.13	274.64	252.10	232.60	206.73	194.31	255.66	250.86	269.07	288.18	318.11	337.12
γ 35.0	260.03	256.26	234.70	216.55	192.56	180.43	238.85	234.14	251.37	269.87	299.40	317.99
γ 36.0	242.70	239.15	218.28	201.36	178.67	167.08	222.94	218.76	234.54	252.05	281.08	299.31
γ 37.0	226.20	222.97	203.11	187.12	165.12	154.92	207.91	204.30	218.79	234.93	262.68	280.80
γ 38.0	210.53	207.64	188.73	173.36	152.98	144.14	193.70	190.56	204.14	218.98	244.80	261.96
γ 39.0	195.64	193.13	174.52	160.09	142.19	133.84	179.67	176.77	190.19	204.10	227.98	243.98
γ 40.0	181.17	178.64	161.23	148.35	132.02	124.00	166.13	163.53	176.52	190.10	212.52	227.35
γ 41.0	167.24	164.74	149.49	137.96	122.40	114.90	154.19	151.72	163.25	176.41	197.92	212.12
γ 42.0	154.78	152.66	138.95	127.97	113.47	106.67	143.56	141.29	151.34	162.92	183.90	197.61
γ 43.0	143.70	141.92	128.99	118.88	105.20	98.96	133.43	131.21	140.72	150.83	170.41	183.33
γ 44.0	133.27	131.92	119.65	110.46	97.72	91.75	123.95	121.50	130.73	140.27	157.19	169.44
γ 45.0	123.55	122.37	111.11	102.53	90.90	84.99	115.05	112.69	121.28	130.36	145.62	156.52
γ 46.0	114.61	113.51	102.91	95.21	84.28	78.44	106.86	104.61	112.52	120.85	135.25	144.96

# IES Indoor Report

**Photometric Filename:GL-15W-COB-1500-MH-15D-3000K-老化前.IES**

## Candela Tabulation - (Cont.)

[illegible]



**Photometric Filename:GL-15W-COB-1500-MH-15D-3000K-老化前.IES**

[illegible]

**Photometric Filename:GL-15W-COB-1500-MH-15D-3000K-老化前.IES**

[illegible]